

### ► Code Number

1177009

### ► Description

Vitreous china washdown retrofit urinal

### ► Flush Cycle

0.125 to 0.5 gpf/0.5 to 1.9 Lpf

Flush volume is determined by the flushometer used with fixture

### ► Fixture Specifications

- White Vitreous China
- Permanent SloanTec™ hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces
- 2" NPT outlet flange
- All mounting hardware included
- Integral flushing rim
- Vandal resistant strainer assembly included
- 100% factory flush tested
- Washdown flushing action
- ¾" I.P.S. top spud inlet

### ► Plumbing System Requirements


- Minimum Flow Rate: 18 GPM
- Maximum Static Pressure: 80 PSI
- Minimum Flowing Pressure: 25 PSI

### ► Product Specification

- Washdown urinal shall be made of vitreous china with a ¾" top spud. Urinal shall have a 14 ¾" rim from finished wall. Urinal shall include a vandal resistant strainer, inlet spud, and hanger. Urinal shall be Sloan Model SU-7009-STG.

### ► Notes

- All information contained in this document subject to change without written notice
- All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

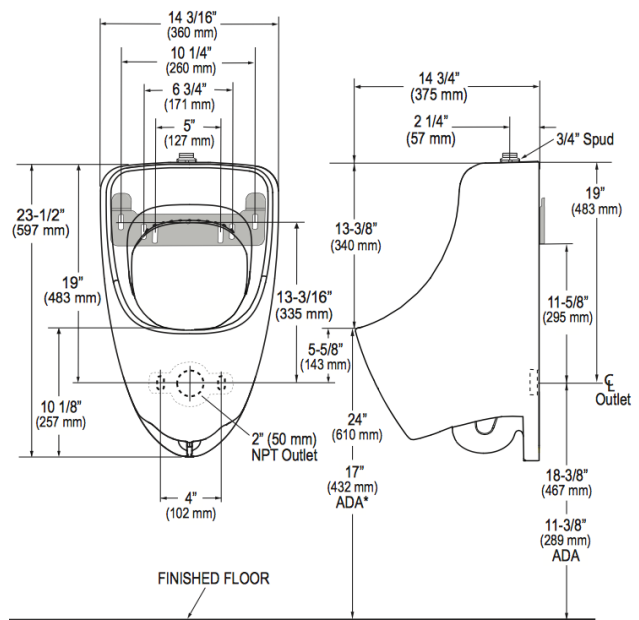

### ► Compliance & Certifications



CALGreen



This space for Architect/Engineer Approval