

Elongated Floor Mounted ADA Closet Fixture with SloanTec™ Glaze

Model ST-2029-STG

► Code Number

2172029

► Description

Vitreous china floor mounted ADA compliant water closet

► Flush Cycle

- 1.1 to 1.6 gpf/4.2 to 6.0 Lpf
- Flush volume is determined by the flushometer used with fixture

► Fixture Specification

- White Vitreous china
- Permanent SloanTec™ hydrophobic antimicrobial glaze inhibits the growth and buildup of germs, bacteria, mold, mildew and mineral scale on the surfaces
- Siphon jet flushing action achieves 1000g Map score when used with any Sloan flushometer
- Integral flushing rim
- Elongated bowl
- Water spot area 10" x 7-1/2"
- Closet bolts and caps included
- Toilet seat not included
- 1-1/2" I.P.S. top spud inlet
- 2 1/8" fully glazed trapway diameter
- Floor mounted, Floor outlet

► Recommended Seats

- Bemis - 1955CT/1955SSCT & 2155CT/2155SSCT
- Church - 295CT/295SSCT & 2155CT/2155SSCT

► Plumbing System Requirements


- Maximum Static Pressure: 80 PSI
- Minimum Flow Rate: 25 GPM
- Minimum Flowing Pressure: 25 PSI

► Product Specification

- Elongated water closet shall be made of vitreous china with SloanTec™ Glaze with a 1-1/2" top spud. Water Closet shall be floor mounted. Water Closet shall be ADA compliant. Water Closet shall be Sloan Model ST-2029-STG.

► Notes

- This model meets the requirements for a High Efficiency Toilet when used with a high efficiency flushometer (1.28 gpf/4.8 Lpf or 1.1/1.6 gpf-4.2/6.0 Lpf dual-flush).
- All information contained in this document subject to change without written notice
- All vitreous china dimensions shown in these drawings are nominal and not to scale. Dimensions can vary within the tolerances established in the governing ASME A112.19/CSA B45.1 standard. It is important to consider this when planning rough-in and plumbing layouts.

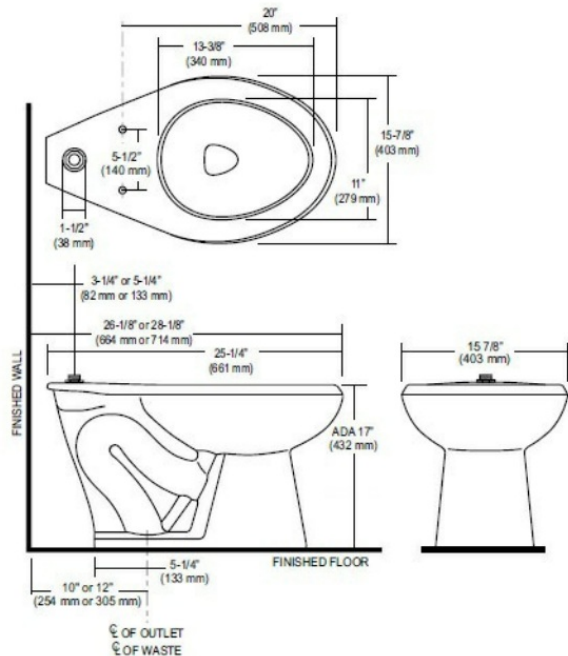

► Compliance & Certifications



This space for Architect/Engineer Approval