

SLOAN[®]



Flushometer Retrofits

Manual to Sensor-activated Conversions

Retrofit Options.

Sloan offers the widest variety of easy-to-install retrofit products designed to convert manual flushometers to sensor-activated. Installation is quick and easy, without having to disconnect the flushometer from the stop and fixture.

Top-mount Retrofit



SOLIS®

- Solar-powered with battery back up
- Dual and single-flush models
- Continuous energy and water savings
- Estimated 6+ year battery life



ECOS®

- Battery-powered
- Dual and single-flush models
- High efficiency water savings
- Estimated 6 year battery life



G2

- Battery-powered
- Single-flush model only
- Estimated 6 year battery life

Side-mount Retrofit



DUAL-FLUSH Side Mount

- Battery-powered
- 30% water savings with reduced flush
- Estimated 3 year battery life
- True Mechanical Override for manual flush



SINGLE-FLUSH Side Mount

- Battery-powered
- Estimated 3 year battery life
- True Mechanical Override for manual flush



SMOOTH®

- Battery-powered
- Installs over existing handle
- Estimated 2 year battery life
- True Mechanical Override for manual flush

SMO (Not shown)


- Battery-powered
- Estimated 3 year battery life.

Easy to install.

Without having to disconnect the flushometer from control stop and fixture.


Top-mount Installation

SOLIS®, ECOS®, and G2

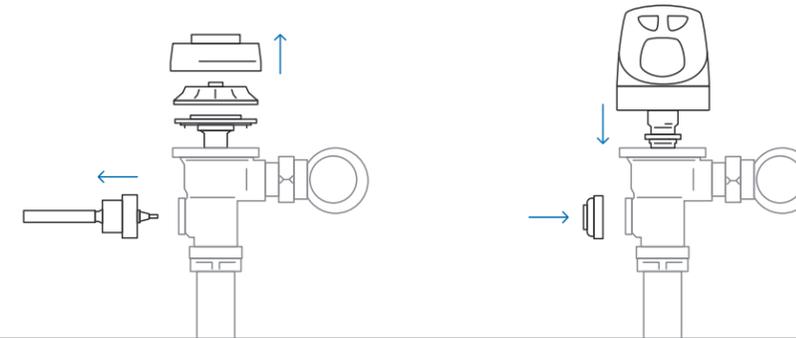


Side-mount Installation

Dual-flush, Single-flush, and SMO

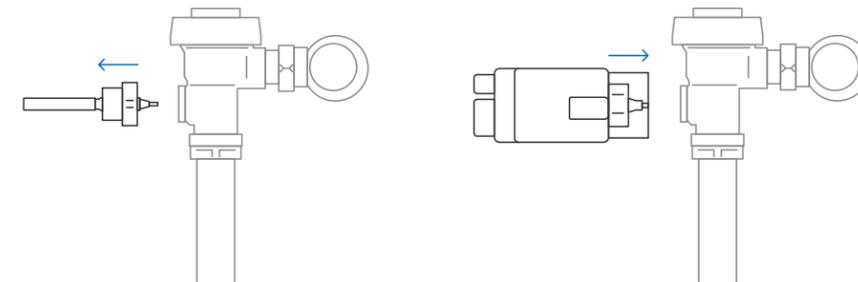

Over-the-handle Installation

SMOOTH

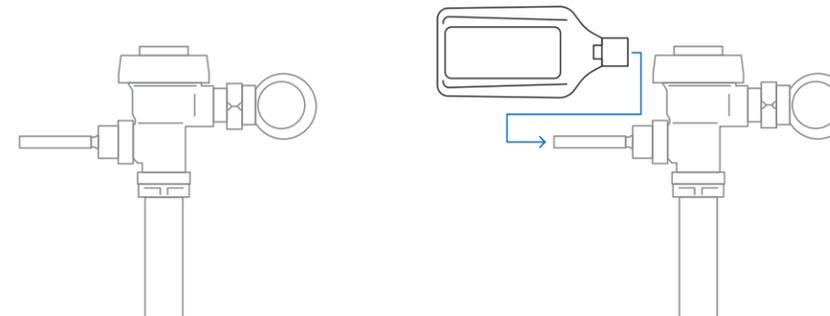


Retrofit now!

Save water and money

Flushing toilets uses a lot of water, especially in a busy restroom. Sloan retrofits, including Sloan's innovative dual flush technology, provide high-efficiency options to help reduce water consumption.

Improve hygiene

No one likes to touch surfaces in a bathroom. Sloan retrofits provide a variety of products to convert existing manual flushometers to hands-free sensor-operated flushometers.

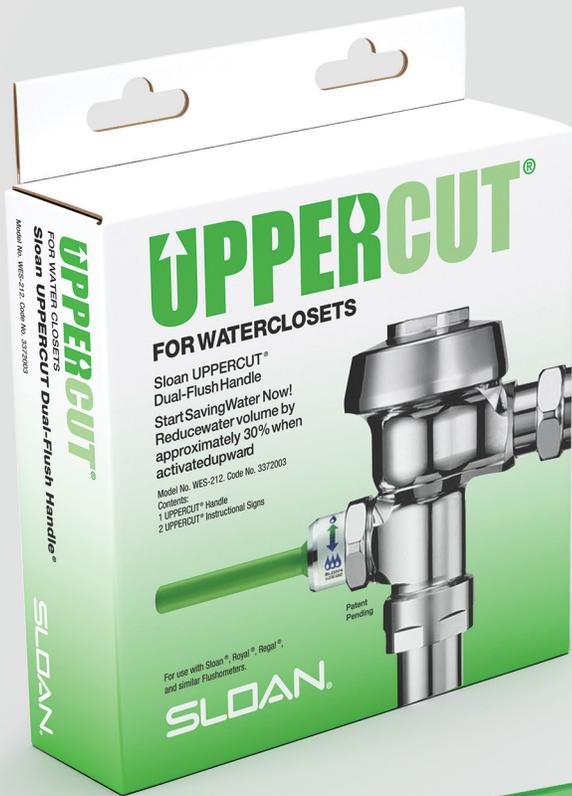

Looking for a cost-conscious way to save water?

Upgrade your manual flushometer with Sloan's manual dual-flush UPPERCUT® handles to efficiently save water. The two flush options help reduce water volume by up to 30 percent.

- Lift up for reduced 1.1 gpf
- Push down for standard 1.6 gpf
- For Royal, Regal, Sloan and Crown 1.6 gpf manual flushometers
- Includes instructional wall plates



To find out more information about retrofits please visit sloan.com/retrofit or call **800.982.5839**.

SLOAN®

Water Connects Us®

World Headquarters
10500 Seymour Avenue
Franklin Park, IL 60131
U.S.A.

sloan.com
800.982.5839

©2016 Sloan Valve Company. All Rights Reserved. Printed in the USA.