

► Code Number

3010503

► Description

Exposed Service Sink Flushometer, for use with top spud Service Sinks.

► Flush Cycle

6.5 gpf / 24.6 Lpf

► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Service Sink Flushometer with the following features:

- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Free Spinning Vandal Resistant Stop Cap
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Diaphragm, Handle Packing and Vacuum Breaker to be molded from PERMEX® Rubber Compound for Chloramine Resistance
- Handle on Front of Valve
- 1" Offset Vacuum Breaker
- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Flush accuracy controlled by CID® technology
- Spud Coupling and Flange for 1 1/2" Top Spud


Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Accessories (Sold Separately)


See Accessories Section of the Sloan catalog for available accessories

► Disclaimer

All information contained within this document subject to change without notice.

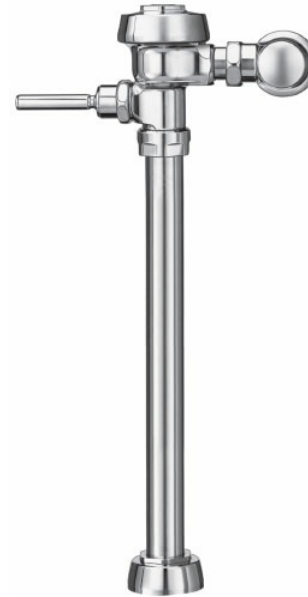

Royal Model 117 Shown

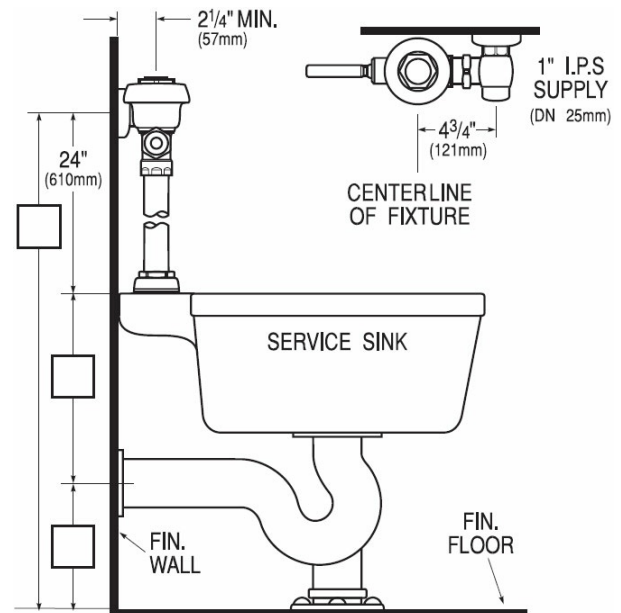

Royal Model 117 Shown

► Compliance & Certifications

Made In The
USA



This space for Architect/Engineer Approval