

► Code Number

3980561

► Description

Exposed Service Sink Flushometer, for use with top spud Service Sinks.

► Flush Cycle

□ 6.5 gpf / 24.6 Lpf

► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling and Spud Flange for 1½" Top Spud
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

► Variations

XYV - Valve Less Vacuum Breaker


L/FC with Spud

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories



Model 117 Shown

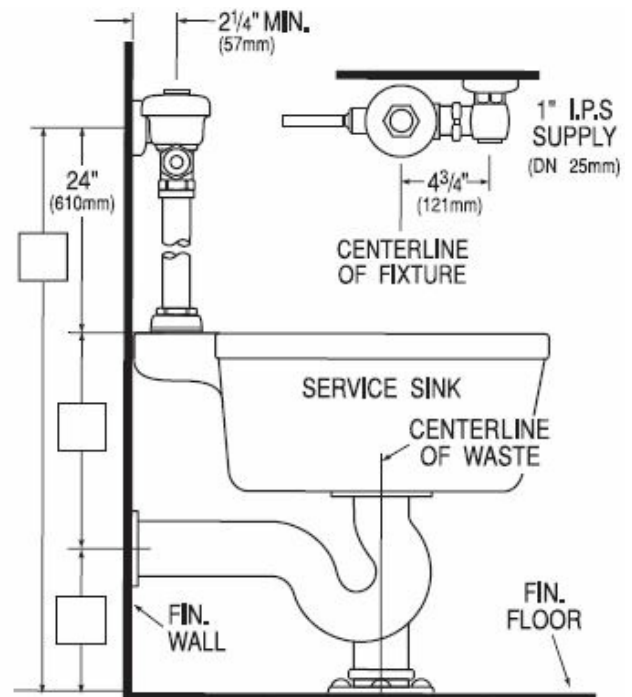

Model 117 Shown

► Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications

Made In The
USA



This space for Architect/Engineer Approval