

- 127-1000 Finish(PC)
- 127-100S Finish(SS)
- G127-1000 Finish(PC)
- G127-100S Finish(SS)

Specifications

Features

- 1.8 GPM Flow Rate (G127 Only)
- 2.2 GPM Flow Rate (127 Only)
- Blade Handles
- Swivel Spout
- Compression Valves
- Pforever Warranty®

- Blade Handles
- Wallmount
- Compression Valves


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead) (G127 Only)
- EPA WaterSense Certification 1.5 gpm, 5.7 L/Min (G127 Only)



Dimensions

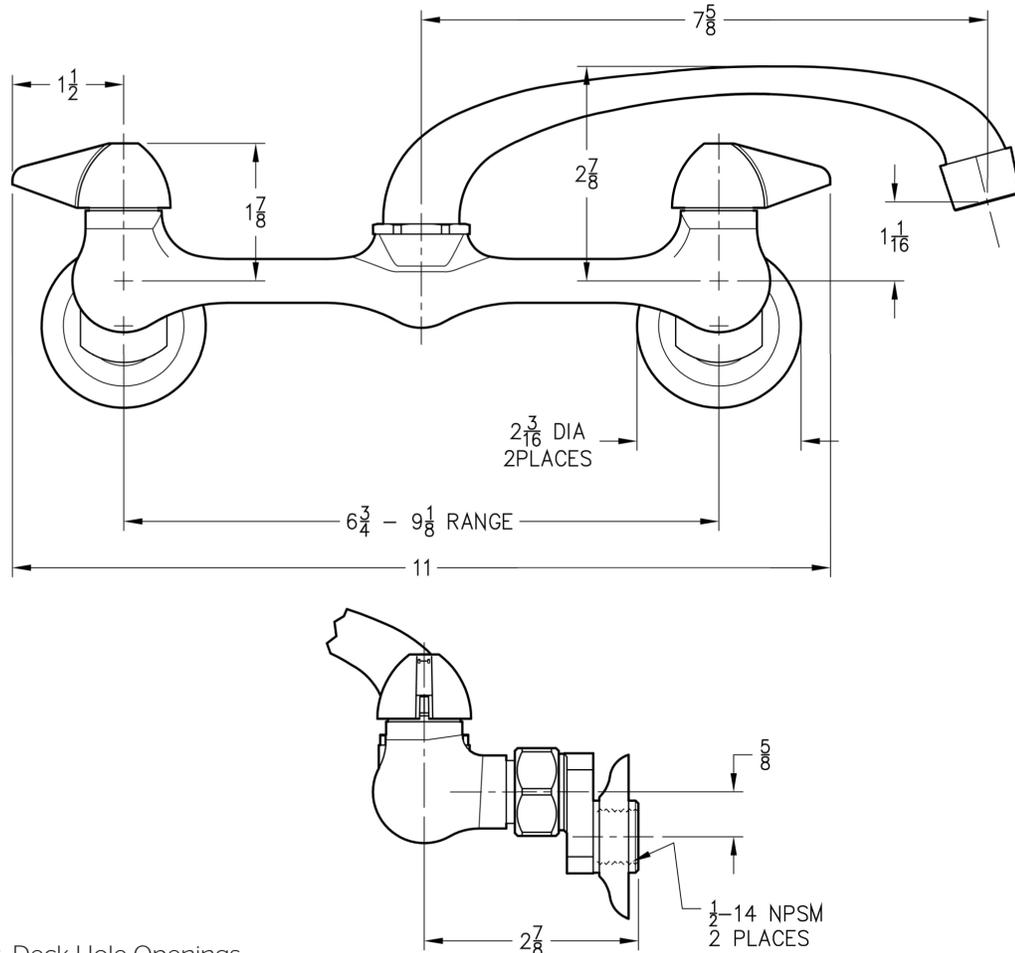

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings