


LG529-MCC Finish(C) ☐

LG529-MCS Finish(S) ☐

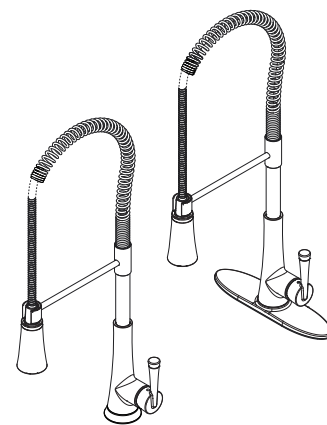

Specifications

Features

- 1.8 GPM Flow Rate
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- 75" Nylon Braided Hose
- Mounting Hardware Included
- Self Cleaning Spray Head
- Quick Install Tool
- Pfast Connect
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- CEC Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

