


## Thermostatic™ Tub & Shower

- |   |   |
|---|---|
| R89-1TUC Finish(C) <input type="checkbox"/> | R89-8TUC Finish(C) <input type="checkbox"/> |
| R89-1TUK Finish(K) <input type="checkbox"/> | R89-8TUK Finish(K) <input type="checkbox"/> |
| R89-1TUY Finish(Y) <input type="checkbox"/> | R89-8TUY Finish(Y) <input type="checkbox"/> |
| R89-7TUC Finish(C) <input type="checkbox"/> |   |
| R89-7TUK Finish(K) <input type="checkbox"/> |   |
| R89-7TUY Finish(Y) <input type="checkbox"/> |   |

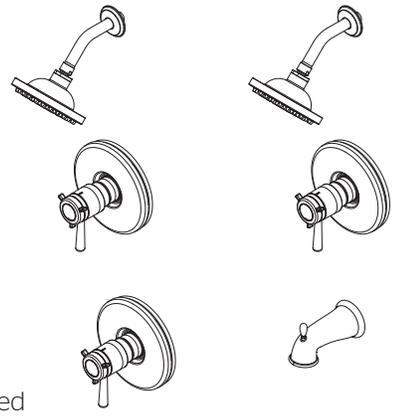

## Specifications

- Trim Only, Valve Not Included

### Features

- 2.5 GPM Flow Rate (Showerhead)
- Temperature and Volume Control
- Shower Only (7TU Only)
- Tub and Shower (8TU Only)
- Flange Only (1TU Only)
- Fits TX8 Valve Bodies
- Trim Only, Valve Not Included
- 1/2" Thermostatic System
- PVD Finish (K Finish Only)
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®

### Code Compliance

- Pfister products are designed and manufactured in compliance with the following standards and codes:
- IAPMO Certified
  - CSA B125 Certified
  - ASME A112.18.1
  - ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

