

# Technical Information Bulletin

## LED Lamps



Date: \_\_\_\_\_ Name of distributor: \_\_\_\_\_  
In hands date of project: \_\_\_\_\_ Client #: \_\_\_\_\_  
Project name/Number: \_\_\_\_\_ Name of end user: \_\_\_\_\_

### ORDERING INFORMATION


Order code: 68004  
Description: LED/A19/S2/9W/50K/STD 4P  
UPC: 069549680043  
Case quantity: 1 / 96

### PERFORMANCE DATA

Shape: A19  
Wattage (W): 9  
Base: E26  
Lamp voltage (VAC): 120  
Colour temperature (K)\*\*: 5 000  
Life L70 (hrs): 25 000  
Initial lumens (lm)\*: 800  
Initial lumens per watt (lm/W): 89  
CRI: 80  
Beam angle (°): 220  
Power factor: 0.70  
Operating temperature range: - 20 °C / - 4 °F to 40 °C / 104 °F

\*Initial lumens range: +/- 10 %

\*\*Typical colour temperature range: +/- 5 %

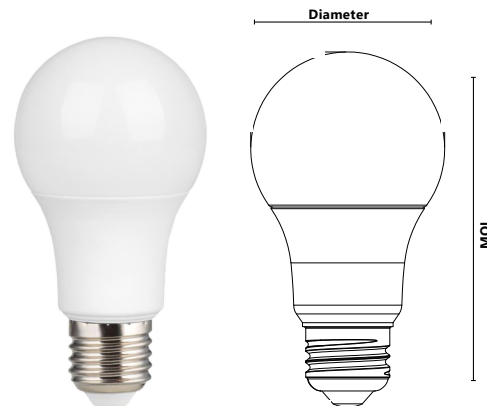

MOL : 4 1/4 in. (108 mm)

Dia. : 2 3/8 in. (60 mm)

### COMPATIBLE DIMMERS

Brand	Model
Lutron	PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P
Cooper	RRD-6NA, AAL06
Leviton	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1
Legrand	RH703PTUTC

Dimming performance might be impacted when using the above dimmers with only one lamp.  
Full performance achieved with at two or more lamps.

### CAUTIONS

- Turn power off before inspection, installation, or removal.
- Risk of electrical shock – do not use where directly exposed to water or weather.
- Suitable for use in totally enclosed luminaires.
- Suitable for use in damp locations.
- Do not open – no user serviceable parts inside.
- Use only on 120 VAC, 60Hz circuits.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.
- Compatible with most dimmers.
- For complete dimmer and warranty information visit [www.standardpro.com](http://www.standardpro.com).

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: \_\_\_\_\_  
Company: \_\_\_\_\_  
Signature: \_\_\_\_\_

Date: \_\_\_\_\_

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.  
Data is based upon tests performed in a controlled environment and representative of relative performance.  
Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 18, 2021