

## ORDERING INFORMATION

**Order code:** 69290  
**Description:** F54T5/65K/8/H0/PS/G5/STD S2  
**UPC:** 069549026001  
**Case quantity:** 25

## PERFORMANCE DATA


**Shape:** T5  
**Base:** G5 (Min Bipin)  
**Starting method:** Program Start (PS)  
**Wattage (W):** 54  
**Colour temperature (K):** 6 500  
**CRI:** 85  
**Rated life on PS/PRS<sup>1</sup> ballast:**  
     Based on a 3 hour start 30 000  
     Based on a 12 hour start 40 000  
**Initial lumens (lm):** 4 750  
**Mean lumens (lm):** 4 434  
**Nominal efficiency (lm/W):** 87  
**TCLP compliant:** Yes  
**Phosphor composition:** Triphosphor  
**Nominal lamp operating frequency (Hz):** 60  
<sup>3</sup> Minimum starting temperature (°C): -10

<sup>1</sup> The life rating indicated is based on 3 hour burning cycles under specified conditions and with ballast meeting ANSI specifications.  
<sup>2</sup> The minimum starting temperature is a function of the ballast.




Nominal length : 46 in. (1 168 mm)  
 Dia. : 5/8 in. (16 mm)

## DIMENSIONS

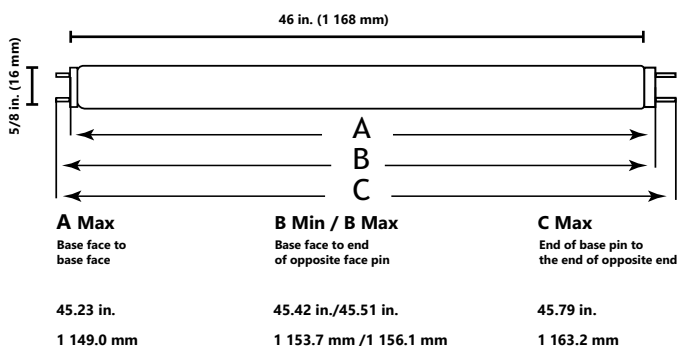

## SPECTRAL DISTRIBUTION

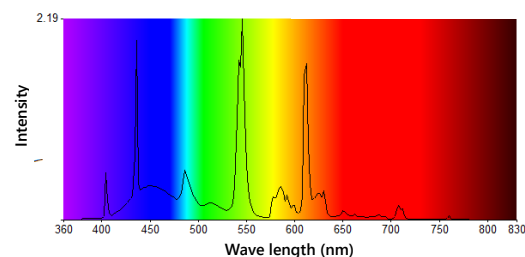

Means this bulb meets federal minimum efficiency standards.

Data is based upon tests performed in a controlled environment and representative of relative performance.  
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

REV 26/10/2022

**STANDARD**