

Project: \_\_\_\_\_ Type: \_\_\_\_\_

Drawn by: \_\_\_\_\_ Catalogue #: \_\_\_\_\_ Date: \_\_\_\_\_

*Individual Spec Sheet*

# A19

## CHOICE LED LAMPS

### ORDERING INFORMATION

**Order code:** 69857  
**Model number:** A19/S3/9W/50K/ND/CHOICE/STD 4P  
**UPC:** 069549030800  
**Case quantity:** 12 x 4 pack

### PHYSICAL DATA


**Base:** E26  
**Type:** A19 4 pack

### PERFORMANCE DATA

**Watts (W):** 9  
**Traditional equivalent (W):** 60  
**Volts (V AC):** 120  
**Color temperature (K)<sup>1</sup>:** 5 000  
**Lumen output (lm)<sup>2</sup>:** 800  
**Efficacy (lm/W):** 89  
**CRI:** 80  
**Dimmable:** No  
**Life L70 (h)<sup>3</sup>:** 15 000  
**Beam Angle:** 180  
**Power factor:** ≥0.5  
**Frequency (Hz):** 60  
**Input current (A):** 140  
**Operating temp. range:** - 20 °C / - 4 °F to 30 °C / 86 °F  
**Energy Star:** No  
**Warranty:** 2 Years

<sup>1</sup> Typical color temperature range: +/- 5 %.  
<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.  
<sup>3</sup> Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

### DIMENSIONS

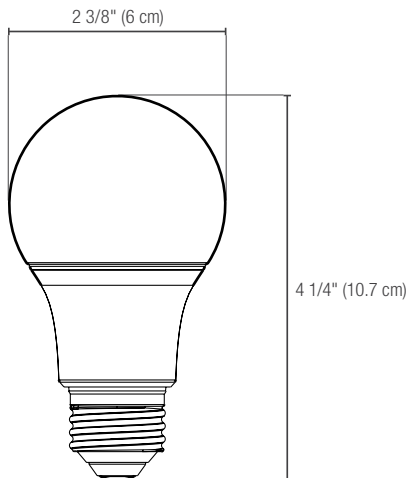

**2**<sub>yrs</sub>  
**warranty**

 **non dimmable**

 **damp location**



ICES  
005



This lighting equipment meets requirements of ICES-005 issue 5 - class B for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.