

Technical Information Bulletin

Design LED Filament Lamps




Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67766
 Description: T6/S3/4.5W/30K/E12/V/FIL/STD
 UPC: 69549677661
 Case quantity: 25 / 200

PHYSICAL DATA

Shape: T6
 Base: E12
 Finish: Clear
 Filament type: Vertical

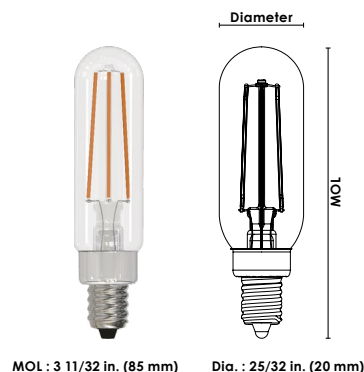

PERFORMANCE DATA

Watts (W): 4.5
 Volts (VAC): 120
 Colour temp. (K)¹: 3 000
 Lumen output (lm)²: 450
 Lumen per Watts (lm/W): 100
 Traditional equivalent (W): 40
 CRI: 80
 Life L70 (h): 15 000
 Beam angle (°): 300
 Power factor: 0.9
 Frequency (Hz): 60
 Dimming: Forward
 Burning position: Universal
 Operating temp. range: -20 °C to 40 °C (-4 °F to 104 °F)

¹ Typical colour temperature range: +/- 5 %
² Initial lumens range: +/- 5 %

COMPATIBLE DIMMERS

| BRAND | MODEL |
|---------|-------------------------------------------------------------------------------------|
| COOPER | RRD-6NA, AAL06, SLC03P, |
| LEGRAND | RH703PTUTC |
| LEVITON | IPL06, 6674, DSL06-1LZ, IPE04-1LZ, DDMX1 |
| LUTRON | PD-5NE, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P |

* Slight flicker might occur on low intensity with some dimmers



| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

March 23, 2021