

## Individual Spec Sheet

# WPS GEN 4

## CLASSIC WALL PACK

Selectable color temperature (3 000/4 000/5 000 K)

Power selectable

Integrated Photocell

Multi-Voltage (120-347 V)

### ORDERING INFORMATION

**Order code:** 68315  
**Model number:** WPS-PS100-Q-3C  
**UPC:** 069549007314  
**DLC unique ID:** PLE7PYF9LCSH  
**Case quantity:** 1

### PHYSICAL DATA

**Dimensions:** 14.37" x 9.33" x 7.36" (365 mm x 237 mm x 187 mm)  
**Housing material:** Aluminium die-cast  
**Lens Material:** Prismatic tempered glass lens  
**Photocell:** Some of the configurations comes with a button type photocell that can be turned off by using the internal switch if needed

### PERFORMANCE DATA

**Watts (W):** 60/80/100  
**Volts (VAC):** 120 - 347  
**Colour temperature (K)<sup>1</sup>:** 3 000/4 000/5 000  
**Lumen output (lm)<sup>2</sup>:** 8 333 - 14 938  
**Efficiency (lm/W):** 140 - 152  
**CRI:** >80  
**Finish:** Bronze  
**Photocell:** Yes  
**Dimming (Yes/No):** Yes  
**LED current (mA)** 2 100  
**Power factor:** 0.90  
**THD (%):** 20  
**Operating temp. range:** -40°C to 50°C

<sup>1</sup> Typical colour temperature range: +/- 5 %

<sup>2</sup> Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %


### COMPATIBLE ACCESSORIES

Order code	Description
68370	18" Bronze metal backplate
68371	Bronze glareshield
68372	Stainless Steel wireguard




Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at [www.designlights.org/search](http://www.designlights.org/search).

## DIMENSIONS

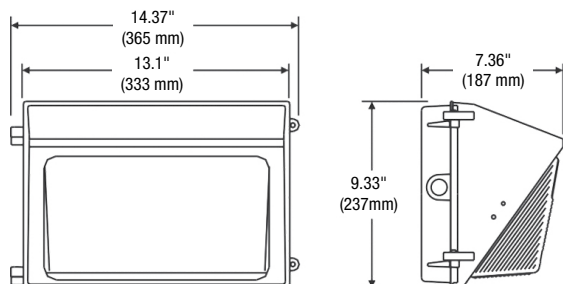


## SELECTABLE COLOR TEMPERATURE AND ON/OFF INTEGRATED PHOTOCELL

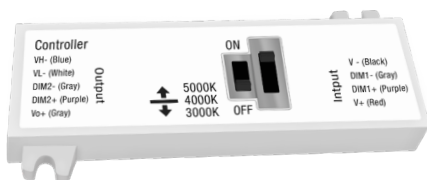

## POWER SELECTABLE


	Order code	
Power Selection	68314	68315
1	25 W	60 W
2	30 W	80 W
3	40 W	100 W



## PHOTOMETRIC DATA<sup>1</sup>

68315 • WPS-PS100-Q-3C • 13 962.6 lm

### Polar candela distribution

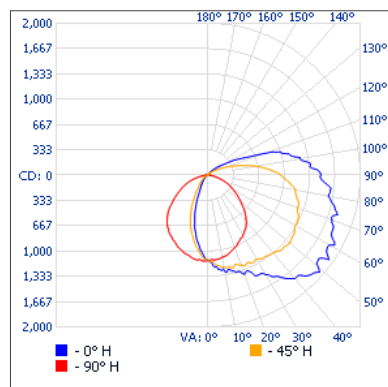

### Zonal lumen summary

Zone	Lumens	% Lamp
0-30	2 126.9	15.2%
0-40	3 508.3	25.1%
0-60	6 829.9	48.9%
60-90	4 607.0	33%
70-100	4 032.6	28.9%
90-120	2 240.9	16%
0-90	11 436.9	81.9%
90-180	2 525.8	18.1%
0-180	13 962.6	100%

### Illuminance at a distance

Center beam fc		Beam width	
8.3'	42.3	26.4'	22.2'
16.7'	10.4	53.1'	44.7'
25.0'	4.66	79.5'	66.9'
33.3'	2.63	105.8'	89.1'
41.7'	1.67	132.5'	111.6'
50.0'	1.13	158.9'	133.8'

Vert. spread: 115.6°  
Horiz. spread: 106.5°

<sup>1</sup> Complete IES files available on our website.

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name:

Company:

Signature:

Date:

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.  
All products are subject to change or may be discontinued any time without notice.