

Series Spec Sheet

PRMPS-2

"EASY OUT" PLASTIC COMBO RUNNING MAN

(120 min duration standalone unit)

2 x 2.4 W LED heads

The PRMPS-2 commercial plastic combination running man sign is suitable for property management and institutional applications and is designed using durable and lightweight high impact thermoplastic. It comes with a quick snap canopy, two 2.4 W LED heads and runs for 120 min as a standalone unit.

FEATURES AND SPECIFICATIONS

• Electrical circuitry

- LED ultra bright light source
- 120/347 VAC Input, field selectable
- Power consumption:
120 V = 0.053A/6.61 W;
347 V = 0.020A/6.55 W
- Discharge time of 120 minutes
- Lead acid battery
- Two 2.4 W LED heads

• Mechanical

- High impact, UV stabilized, thermoplastic construction
- Good for damp location
- White color is standard
- Temperature compensated

• Approvals

- Meets requirements of ICES-005
- CSA Certified to C22.2 #141-15
- CSA Certified to C860-11

OVERVIEW

Light source	LED
Input voltage (VAC)	120 / 347
Power consumption	120 V = 0.053A/6.61 W 347 V = 0.020A/6.55 W



quick
ship



LED
fixture



ICES
005



Energy Verified
Energie Vérifiée

For complete warranty details, please see our terms and conditions on our website.

QUICK SHIP TECHNICAL SPECIFICATION TABLE 🕒¹

Part number	DC Volts (VDC)	Watts (W)	Nbr of faces	Nbr of heads	Head	Lamp (W)	Light source	Input Volts (VAC)	Color
PRMPS-2	N/A	N/A	Universal	2	N	2.4	LED	120/347	White


¹ **QUICK SHIP:** Not all products are Quick Ship. To view our Quick Ship qualified products, please consult our Quick Ship Product Guide at stanprols.com/quick-ship-product-guide. Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

WIREGUARD²

	Part number	Dimensions (in)
Wall mount	WGD510	17.25x17.25x7
Ceiling mount	WGD650	13.75x12.25x16.5

² Please contact your STANPRO customer service representative for more information.

DIMENSIONS

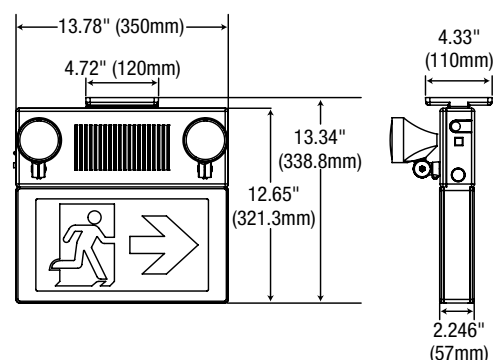

CONFIGURATION



Comes standard with three pictogram legends for direction selection.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.