

S COMPACT REMOTE

FEATURES AND SPECIFICATIONS

• Mechanical

- Die cast, solid metal housing with die cast, twist lock lamp collar
- Complete adjustability - both tilt and swivel
- 5" diameter canopy standard
- Two canopy mounting holes designed to match standard electrical junction boxes
- White paint finish is standard, black color is optional
- MR16 lamp designed with low glare reflector and available in 6 VDC, 12 VDC or 24 VDC

• Compliances

- CSA Certified to C22.2 #141.15
- Meets requirements of ICES-005



OVERVIEW

Light source	LED, Incandescent
Input Voltage (VDC)	6, 12, 24



quick
ship



ICES
005



QUICK SHIP AND TECHNICAL SPECIFICATION TABLE 🕒¹

Part number	DC Volts (VDC)	Nbr of heads	Head	Lamp (W)	Light source	Color
S1-06-24V4WLR/WH	6-24	1	S	4	LED	White
S2-06-24V4WLR/WH	6-24	2	S	4	LED	White

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

ORDERING GUIDE - LED

Series	Nbr of heads	Volts (VDC operational)	Watts (W)	Lamp type	Color	Options
S	1 - Single head	06-24V - 6 to 24	4W - 4	LR - LED	WH - White (standard) BK - Black	LCP - Less Canopy TP - Tamper Proof Screws WGD - Wireguard (order separately) PGD - Polycarb Guard
	2 - Double head		5W - 5	LA - LED		
	3 - Triple head	12-24V - 12 to 24	6W - 6	LA - LED		
	4 - Quad head (require 12" dia. canopy)		7W - 7			

ORDERING GUIDE - INCANDESCENT

Series	Nbr of heads	Volts (VDC)	Lamp type	Color	Options
S	1 - Single head	06V - 6	See lamp selection chart below	WH - White (standard) BK - Black	LCP - Less Canopy TP - Tamper Proof Screws WGD - Wireguard (order separately) PGD - Polycarb Guard
	2 - Double head	12V - 12			
	3 - Triple head	24V - 24			
	4 - Quad head (require 12" dia. canopy)				

LAMP SELECTION - INCANDESCENT


MR16 • Small head	6 V	12 V	24 V
Quartz halogen	10Q	12Q, 20Q, 35Q	12Q, 20Q, 50Q

WIREGUARD ¹

	Part number	Dimension (in)
1 head	WGD550	8.5x6x7
2 heads		

¹ Please contact your customer service representative for more information.

DIMENSIONS

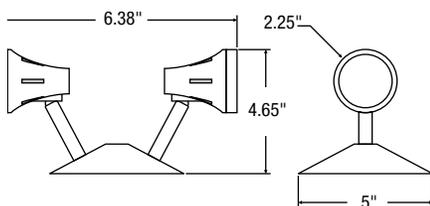

SPACING GUIDE

Mounting height	Spacing center to center (ft)			
	4WLR	5WLA	6WLA	7WLA
8 ft	76	81	94	108
10 ft	79	79	93	106
15 ft	66	62	82	96
20 ft	53	49	73	87

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.