


SLE-2

PLASTIC DECORATIVE BATTERY UNIT 6VDC Output/120/347VAC Input

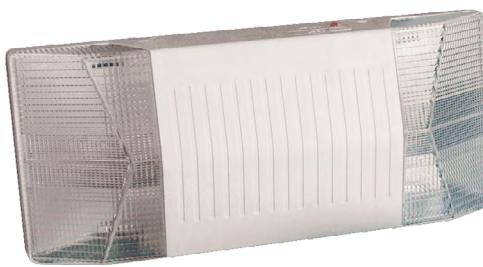

Approvals:
CSA Certified to C22.2 #141.15

DESCRIPTION

The SLE-2 series of plastic battery units utilizes a modern design that blends well into current decor styles. The SLE-2 series is a stand-alone battery unit (not capable of remote load connection) configured with 6VDC output, 30W capacity for 30 minutes duration.

CIRCUITRY


- 120/347VAC 60Hz Input, field selectable
- Solid state variable rate charger
- 6VDC emergency power output
- 30W battery capacity
- 30 minutes emergency battery duration standard
- Momentary push button test switch
- Pilot LED for AC ON
- Fully automatic, current limited charger
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Low profile, twin lamp configuration
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Unit "quick snaps" onto backplate for simple, speedy installation
- White color is standard

Note: Not intended for flush ceiling mount.

DIMENSIONS

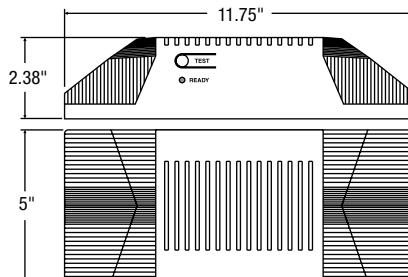

ORDERING GUIDE

SLE-2	7.2W	WH	
Series	Lamp	Colour	Options
SLE-2	7.2W (tungsten)	WH - White (standard)	LC

MODEL RATINGS

Model	Voltage	Wattage capacities				
		30 min.	60 min.	90 min.	120 min.	
SLE-2	6VDC	30	15	N/A	N/A	