


# WALL FAN HEATER

## RWF SERIES



## THE GOLD STANDARD IN FAN HEATERS

You won't find anything better than this efficient, durable and noise-free forced-air heater. The PULSAIR™ is extremely popular for many reasons. First, it can be recessed or surface mounted with a surface adapter (optional). In addition, it can be mounted vertically or horizontally, directing the air flow upward or downward and to the right or to the left, respectively. Last, the slim-line PULSAIR™ can be recessed into a wall thickness of 2 in. to 3 in. While it's a winning heating solution for the hallway and bathroom, it can also be installed in other parts of the house, such as the office or in commercial buildings. Its nichrome element provides instant heat. Available from 500 W to 2000 W, and from 120 V to 347 V, the PULSAIR™ is recognized and recommended by those in the know.

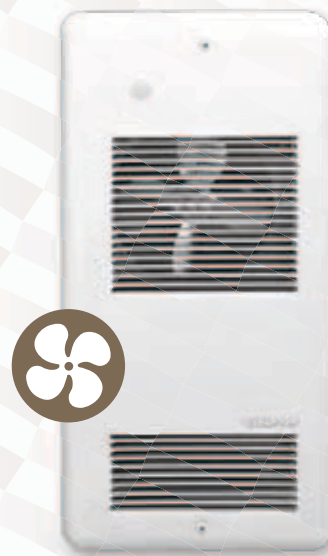

**5** YEAR  
WARRANTY

### THE QUIETEST WALL FAN HEATER ON THE MARKET

### 347 V MODEL AVAILABLE

### NICHROME ELEMENT FOR INSTANT HEAT

### MULTIPLE INSTALLATION OPTIONS

RECESSED, SURFACE MOUNTED, HORIZONTAL  
OR VERTICAL

### THE MOST RESISTANT GRILLE ON THE MARKET

### IDEAL FOR:

HALLWAY, BATHROOM, LOCKER ROOM, OFFICE

### COLOURS

- standard: white, silica white, silver
- optional: almond, black, textured charcoal, clear anodized (paint), nickel, champagne, light bronze, dark brown (10% surcharge)

### FINISH

epoxy-polyester powdercoat

### MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- quiet fan - 40 CFM (500 W to 1000 W models) - 75 CFM (1250 W to 2000 W models)
- thermal protection with automatic reset

### ELEMENT

nichrome element produces instant heat

### CONTROL

- built-in thermostat (optional)
- wall thermostat (not included) – the use of an electronic thermostat is strongly recommended

### INSTALLATION

- wall mounted
- recessed (wall must have a depth of 2 3/8 in. minimum)
- surface mounted with surface adapter (optional)
- four installation positions


## ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
RWFT1*	built-in single pole thermostat [120 V-347 V]	28.00
RWFT2*	built-in double pole thermostat [120 V-347 V]	39.00
RWFSAW	surface adapter (white)	38.00
RWFSASW	surface adapter (silica white)	38.00
RWFSAS	surface adapter (silver)	38.00

\* Add W for white, SW for silica white or BK for black

\* Supplied with a white knob (with a white grille), a silica white knob (with a silica white grille) and a black knob (with a silver or any other colour grille)

### FOUR INSTALLATION OPTIONS

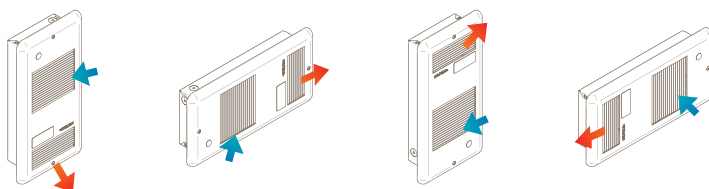

# TECHNICAL SPECIFICATIONS

WITHOUT CONTROL		BUILT-IN THERMOSTAT		24 V CONTROL		POWER	VOLTAGE	FLOW	THROW DISTANCE		HEAT RISE		WEIGHT	
CODE	PRICE	CODE	PRICE	CODE	PRICE	WATTS	VOLTS	CFM	M	FT.	°C	°F	KG	LB
RWF0501	144.00	---	---	---	---	500	120	40	2	6'6"	30	54	2.7	6
RWF0508	144.00	---	---	---	---	500	208	40	2	6'6"	30	54	2.7	6
RWF0502	144.00	---	---	---	---	500/375	240/208	40	2	6'6"	30	54	2.7	6
RWF0507	144.00	---	---	---	---	500	277	40	2	6'6"	30	54	2.7	6
RWF0503	182.00	RWF0503T	210.00	RWF0503C24	222.00	500	347	40	2	6'6"	30	54	2.7	6
RWF0751	149.00	---	---	---	---	750	120	40	2	6'6"	67	121	2.7	6
RWF0758	149.00	---	---	---	---	750	208	40	2	6'6"	67	121	2.7	6
RWF0752	149.00	---	---	---	---	750/563	240/208	40	2	6'6"	67	121	2.7	6
RWF0757	149.00	---	---	---	---	750	277	40	2	6'6"	67	121	2.7	6
RWF0753	188.00	RWF0753T	216.00	RWF0753C24	227.00	750	347	40	2	6'6"	67	121	2.7	6
RWF1001	155.00	---	---	---	---	1000	120	40	2	6'6"	76	136	2.7	6
RWF1008	155.00	---	---	---	---	1000	208	40	2	6'6"	76	136	2.7	6
RWF1002	155.00	---	---	---	---	1000/750	240/208	40	2	6'6"	76	136	2.7	6
RWF1007	155.00	---	---	---	---	1000	277	40	2	6'6"	76	136	2.7	6
RWF1003	194.00	RWF1003T	222.00	RWF1003C24	233.00	1000	347	40	2	6'6"	76	136	2.7	6
RWF1251	160.00	---	---	---	---	1250	120	75	2.1	6'10"	65	117	2.7	6
RWF1258	160.00	---	---	---	---	1250	208	75	2.1	6'10"	65	117	2.7	6
RWF1252	160.00	---	---	---	---	1250/938	240/208	75	2.1	6'10"	65	117	2.7	6
RWF1257	160.00	---	---	---	---	1250	277	75	2.1	6'10"	65	117	2.7	6
RWF1253	199.00	RWF1253T	227.00	RWF1253C24	238.00	1250	347	75	2.1	6'10"	65	117	2.7	6
RWF1501	166.00	---	---	---	---	1500	120	75	2.1	6'10"	79	141	2.7	6
RWF1508	166.00	---	---	---	---	1500	208	75	2.1	6'10"	79	141	2.7	6
RWF1502	166.00	---	---	---	---	1500/1125	240/208	75	2.1	6'10"	79	141	2.7	6
RWF1507	166.00	---	---	---	---	1500	277	75	2.1	6'10"	79	141	2.7	6
RWF1503	205.00	RWF1503T	233.00	RWF1503C24	244.00	1500	347	75	2.1	6'10"	79	141	2.7	6
---	---	---	---	---	---	2000	120	75	2.1	6'10"	111	199	2.7	6
RWF2002	177.00	---	---	---	---	2000/1500	240/208	75	2.1	6'10"	111	199	2.7	6
RWF2008	177.00	---	---	---	---	2000	208	75	2.1	6'10"	111	199	2.7	6
RWF2007	177.00	---	---	---	---	2000	277	75	2.1	6'10"	111	199	2.7	6
RWF2003	216.00	RWF2003T	244.00	RWF2003C24	255.00	2000	347	75	2.1	6'10"	111	199	2.7	6

Add W for white, SW for silica white or S for silver (or consult the optional colour chart and contact your \*STELPRO representative for all other colours)  
 --- not available

## TECHNICAL DRAWINGS

