

PORTABLE HEATER

MULTIPURPOSE – SCH SERIES

EFFICIENT, SAFE AND VERSATILE

Any construction worker will tell you that the SCH is the fast-acting heating unit most often found on construction sites, resulting in the nick-name “the construction heater”. Housed in a 20-gauge steel casing, it features a rugged protective grille and nichrome element for instant heat at start-up. Despite its small size, this heating powerhouse boasts 4800 W. The SCH can be placed on the ground or against a wall, using a support bracket, available as an option. This heater is right at home on construction sites and in workshops and garages. The SCH: when you need rapid, reliable heat.



SAFE AND RUGGED (20-GAUGE STEEL)

4800 W HOUSED IN A SMALL UNIT

OPEN COIL GENERATES INSTANT HEAT

PERMANENTLY ENCLOSED LUBRICATED MOTOR (SCH4800T)

VERSATILE: PERMANENT OR TEMPORARY INSTALLATION

WITH OPTIONAL SUPPORT BRACKET

IDEAL FOR:

CONSTRUCTION SITE

COLOURS

red (SCH48T models), yellow (SCH4800T)

FINISH

epoxy-polyester powdercoat

MANUFACTURING

- 20-gauge steel cabinet
- sturdy handle for portability that also serves as cord rack and which adapts to the mounting bracket
- 6 ft. (2 m) 12 Awg. molded cable with 3-prong grounded, 30 A 250 V plug (except for SCH48TWBPL)
- 6 ft. (2 m) 12 Awg. molded cable for hard-wired connection (SCH48TWBPL)
- thermal protection with automatic reset

MOTOR

- 250 CFM fan (SCH48T models)
- permanently enclosed lubricated motor and 300 CFM fan (SCH4800T)

ELEMENT

- nichrome element ensuring increased comfort
- cone-shaped to concentrate the air around the element

CONTROL

built-in thermostat with control knob protector

INSTALLATION

- connects to a standard 30 A 250 V grounded receptacle (except for SCH48TWBPL)
- hard-wired into a wall junction box (SCH48TWBPL)
- mounting bracket that can rotate at 360° while preventing the unit from tipping

ACCESSORY

PRODUCT	DESCRIPTION	PRICE
SCH-WBB	mounting bracket	24.75




TECHNICAL SPECIFICATIONS

PRODUCT	POWER	VOLTAGE	POWER	CONNECTION	MOUNTING BRACKET	COLOUR	WEIGHT	PRICE
CODE	WATTS	VOLTS	BTU/H				KG	LB
SCH48T	4800/3600	240/208	16382/12285	30 A 250 V PLUG	NO	RED	5.9	13
SCH4800T	4800/3600	240/208	16382/12285	30 A 250 V PLUG	NO	YELLOW	5.9	13
SCH48TWB	4800/3600	240/208	16382/12285	30 A 250 V PLUG	YES	RED	5.9	13
SCH48TWBPL	4800/3600	240/208	16382/12285	HARD-WIRED	YES	RED	5.9	13


THROW DISTANCE AND HEAT RISE

MODEL	UNITS	THROW DISTANCE		HEAT RISE	
	KW	M	FT.	°C	°F
SCH48T	4.8	5.9	19'4"	81	145
SCH4800T	4.8	6.4	21'	70	125


TECHNICAL DRAWINGS



FRONT



SIDE

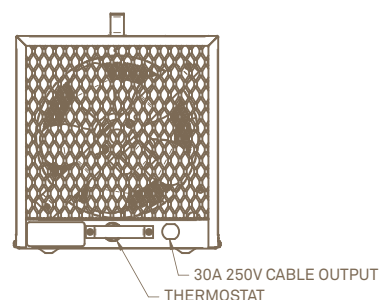

BACK