

ELECTRONIC CONVECTOR

SHC SERIES

HEATING NEVER LOOKED SO GOOD

Our SHC convector has rounded sides and beautiful modern lines that are sure to please you. It is available either with an ultra-accurate built-in electronic thermostat or without, leaving you the option to control it the way you want. This unit is good-looking, available in different colours and is offered in all voltages making it adaptable to both commercial and residential applications. A real gem!



EXCELLENT VALUE

AND BLENDS IN WITH ALL DECORS

INNOVATIVE LOOK

ROUNDED EDGES AND MODERN LINES

TOTALLY QUIET

BUILT-IN ELECTRONIC THERMOSTAT

WITH A BACKLIGHT THAT CAN SERVE AS A NIGHTLIGHT (120 V TO 240 V MODELS)

ADAPTS TO MULTIPLE MARKETS

MANY VOLTAGES AVAILABLE: 120 V, 208 V, 240 V, 277 V, 347 V, 480 V AND 600 V

IDEAL FOR:

KITCHEN, LIVING ROOM, BEDROOM, OFFICE, BASEMENT, COMMERCIAL BUILDING

COLOURS

- standard: white, silica white
- luxurious finish: stainless steel (see price list)
- optional: almond, black, textured charcoal, silver, clear anodized (paint), nickel, champagne, light bronze, dark brown (10% surcharge)

FINISH

epoxy-polyester powdercoat or stainless steel

MANUFACTURING

- 22-gauge steel cabinet and 20-gauge steel front
- the cabinet height improves the chimney effect
- bottom air intake and front air discharge

ELEMENTS

two stainless steel tubular sheathed elements isolated with nylon sleeves reducing expansion and contraction noises

CONTROL


electronic thermostat required: built-in electronic thermostat with LCD screen (optional) or electronic wall thermostat (not included)

INSTALLATION

- surface mounted only
- wall mounted at least 4 in. from the floor
- concealed mounting bracket (included)
- back entry plate with cable clamps (included)



PART OF THE SHC FAMILY
OF PRODUCTS



AVAILABLE SOON : SEMI-PERMANENT
INSTALLATION MODEL

QUICK PLUG-IN INTO RESIDENTIAL 120 V OUTLET

TECHNICAL SPECIFICATIONS

BUILT-IN THERMOSTAT			WITHOUT THERMOSTAT			POWER	VOLTAGE	HEIGHT		LENGTH		WEIGHT	
CODE	W OR SW	SS	CODE	W OR SW	SS			MM	IN.	MM	IN.	KG	LB
SHC0501	171.00	231.00	SHC0501WC	131.00	191.00	500	120	446	17 9/16	440	17 5/16	5.1	11.2
SHC0508	171.00	231.00	SHC0508WC	131.00	191.00	500	208	446	17 9/16	440	17 5/16	5.1	11.2
SHC0502	147.00	207.00	SHC0502WC	107.00	167.00	500/375	240/208	446	17 9/16	440	17 5/16	5.1	11.2
---	---	---	SHC0507WC	131.00	191.00	500	277	446	17 9/16	440	17 5/16	5.1	11.2
---	---	---	SHC0503WC	180.00	239.00	500	347	446	17 9/16	440	17 5/16	5.1	11.2
SHC1001	183.00	243.00	SHC1001WC	143.00	204.00	1000	120	446	17 9/16	581	22 7/8	6.0	13.3
SHC1008	183.00	243.00	SHC1008WC	143.00	204.00	1000	208	446	17 9/16	581	22 7/8	6.0	13.3
SHC1002	159.00	219.00	SHC1002WC	119.00	180.00	1000/750	240/208	446	17 9/16	581	22 7/8	6.0	13.3
---	---	---	SHC1007WC	143.00	204.00	1000	277	446	17 9/16	581	22 7/8	6.0	13.3
---	---	---	SHC1003WC	191.00	251.00	1000	347	446	17 9/16	581	22 7/8	6.0	13.3
---	---	---	SHC1005WC	191.00	251.00	1000	480	446	17 9/16	581	22 7/8	6.0	13.3
---	---	---	SHC1006WC	191.00	251.00	1000	600	446	17 9/16	581	22 7/8	6.0	13.3
SHC1501	195.00	255.00	SHC1501WC	155.00	215.00	1500	120	446	17 9/16	727	28 5/8	7.1	15.7
SHC1508	195.00	255.00	SHC1508WC	155.00	215.00	1500	208	446	17 9/16	727	28 5/8	7.1	15.7
SHC1502	171.00	231.00	SHC1502WC	131.00	191.00	1500/1125	240/208	446	17 9/16	727	28 5/8	7.1	15.7
---	---	---	SHC1507WC	155.00	215.00	1500	277	446	17 9/16	727	28 5/8	7.1	15.7
---	---	---	SHC1503WC	204.00	263.00	1500	347	446	17 9/16	727	28 5/8	7.1	15.7
---	---	---	SHC1505WC	204.00	263.00	1500	480	446	17 9/16	727	28 5/8	7.1	15.7
---	---	---	SHC1506WC	204.00	263.00	1500	600	446	17 9/16	727	28 5/8	7.1	15.7
SHC2008	207.00	267.00	SHC2008WC	167.00	227.00	2000	208	446	17 9/16	889	35	8.6	18.9
SHC2002	183.00	243.00	SHC2002WC	143.00	204.00	2000/1500	240/208	446	17 9/16	889	35	8.6	18.9
---	---	---	SHC2007WC	167.00	227.00	2000	277	446	17 9/16	889	35	8.6	18.9
---	---	---	SHC2003WC	215.00	275.00	2000	347	446	17 9/16	889	35	8.6	18.9
---	---	---	SHC2005WC	215.00	275.00	2000	480	446	17 9/16	889	35	8.6	18.9
---	---	---	SHC2006WC	215.00	275.00	2000	600	446	17 9/16	889	35	8.6	18.9

Add W for white, SW for silica white or SS for stainless steel (or consult the optional colour chart and contact your °STELPRO representative for all other colours).

Mechanical wall thermostats are not compatible with the without thermostat model (WC) – electronic thermostat is required.

--- not available

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
SHCRE153*	built-in electronic low voltage relay [15 A @ 120 V-347 V]	52.50
SHCRE156*	built-in electronic low voltage relay [6 A @ 600 V]	93.00
SHCRE153T*	built-in electronic low voltage relay c/w transformer 24 V [15 A @ 208 V-347 V]	71.50


Electronic relays can receive a PWM (pulsed width modulation) or digital (on/off) signal.

* Factory installed



BUILT-IN ELECTRONIC THERMOSTAT
AVAILABLE FOR THE 120 V TO 240 V MODELS

TECHNICAL DRAWINGS

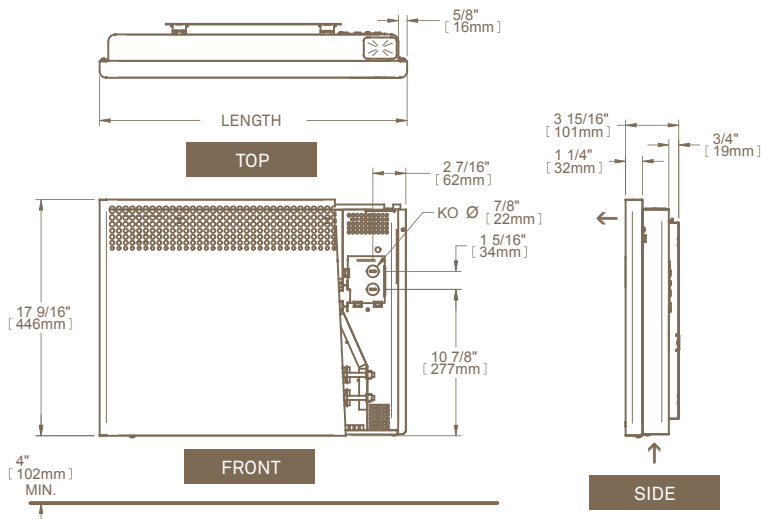

INNOVATIVE LOOK
ROUNDED EDGES AND MODERN LINES



STAINLESS STEEL MODEL (SS) WITH BLACK CABINET