

WALL FAN HEATER

WF SERIES

VERSATILITY IS THE NAME OF THE GAME!

The WF is a high-capacity fan heater that's ideal for building lobbies, long corridors, stairwells, workshops, factories, and warehouses. Its electrical element is made of high-quality nichrome assuring an immediate surge of hot air. The various modes of wall installation make the WF heater one of the most versatile fan heaters on the market: it can be surface mounted or recessed, with a variety of models and heating capacities to choose from.



NEW GRILLE WITH ROUNDED SIDES

DURABLE AND STYLISH

WIDE RANGE OF MODELS & HEATING CAPACITIES

INCLUDING A 4800 W SINGLE MODEL

NICHROME ELEMENT

ASSURING INSTANT HEAT

NEW DISCONNECT SWITCH

OPTIONAL

IDEAL FOR:

LOBBY, CORRIDOR, FACTORY, WAREHOUSE, STAIRWELL

COLOURS

- standard: white, silica white, silver
- luxurious finish: stainless steel (see price list)
- optional: black, textured charcoal, clear anodized (paint), nickel, champagne, light bronze, dark brown (10% surcharge)

FINISH

epoxy-polyester powdercoat or stainless steel

MANUFACTURING

- 20-gauge steel cabinet and 18-gauge steel grille
- top air intake with bottom air discharge
- quiet helicoidal fan: single unit 1 x 160 CFM - double unit 2 x 160 CFM - triple unit 3 x 160 CFM
- thermal protection with automatic reset
- totally enclosed, permanently lubricated motor

ELEMENT

high quality nichrome element producing instant heat

CONTROL

connection of multiple units to the same thermostat is possible with a relay kit without transformer (optional) and an external transformer (not provided)

INSTALLATION


- wall mounted
- recessed or surface mounted with surface adapter (optional)

ACCESSORIES

PRODUCT	DESCRIPTION	PRICE
WFT1	built-in single pole thermostat [120 V-600 V]	41.00
WFT2	built-in double pole thermostat [120 V-600 V]	52.50
WFA1*	surface adapter (single unit)	55.00
WFA2*	surface adapter (double unit)	112.00
WFA3*	surface adapter (triple unit)	167.00
WFA1SS	stainless steel surface adapter (single unit)	74.50
WFA2SS	stainless steel surface adapter (double unit)	151.00
WFA3SS	stainless steel surface adapter (triple unit)	226.00
WFDIS-30*	disconnect switch kit 600 V/30 A, 2 poles	108.00
WFDIS-40*	disconnect switch kit 600 V/40 A, 2 poles/3 poles	128.00
WFDIS-60*	disconnect switch kit 600 V/60 A, 2 poles/3 poles	155.00
WFC24RX*	relay kit without transformer 24 V	90.00

* Add W for white, SW for silica white or S for silver

* Factory installation



ROUNDED SIDES

TECHNICAL SPECIFICATIONS

WITHOUT CONTROL			BUILT-IN THERMOSTAT			240 V CONTROL	24 V CONTROL			POWER	VOLTAGE	WEIGHT	MODEL	
CODE	PRICE W, SW OR S	PRICE SS	CODE	PRICE W, SW OR S	PRICE SS	CODE	CODE	PRICE W, SW OR S	PRICE SS	WATTS	VOLTS	KG	LB	UNIT
WF1508	444.00	599.00	WF1508T	485.00	654.00	WF1508C	WF1508C24	572.00	773.00	1500	208	9	20	SINGLE
WF1502	444.00	599.00	WF1502T	485.00	654.00	WF1502C	WF1502C24	572.00	773.00	1500/1125	240/208	9	20	SINGLE
WF1507	683.00	922.00	WF1507T	724.00	977.00	WF1507C	WF1507C24	811.00	1095.00	1500	277	9	20	SINGLE
WF1503	648.00	875.00	WF1503T	689.00	930.00	WF1503C	WF1503C24	776.00	1048.00	1500	347	9	20	SINGLE
---	---	---	WF1505T	724.00	977.00	WF1505C	WF1505C24	811.00	1095.00	1500	480	9	20	SINGLE
---	---	---	WF1506T	724.00	977.00	WF1506C	WF1506C24	811.00	1095.00	1500	600	10	22	SINGLE
WF2008	444.00	599.00	WF2008T	485.00	654.00	WF2008C	WF2008C24	572.00	773.00	2000	208	9	20	SINGLE
WF2002	444.00	599.00	WF2002T	485.00	654.00	WF2002C	WF2002C24	572.00	773.00	2000/1500	240/208	9	20	SINGLE
WF2007	683.00	922.00	WF2007T	724.00	977.00	WF2007C	WF2007C24	811.00	1095.00	2000	277	9	20	SINGLE
WF2003	648.00	875.00	WF2003T	689.00	930.00	WF2003C	WF2003C24	776.00	1048.00	2000	347	9	20	SINGLE
---	---	---	WF2005T	724.00	977.00	WF2005C	WF2005C24	811.00	1095.00	2000	480	9	20	SINGLE
---	---	---	WF2006T	724.00	977.00	WF2006C	WF2006C24	811.00	1095.00	2000	600	10	22	SINGLE
WF3008	456.00	615.00	WF3008T	496.00	670.00	WF3008C	WF3008C24	584.00	789.00	3000	208	9	20	SINGLE
WF3002	456.00	615.00	WF3002T	496.00	670.00	WF3002C	WF3002C24	584.00	789.00	3000/2250	240/208	9	20	SINGLE
WF3007	695.00	938.00	WF3007T	735.00	993.00	WF3007C	WF3007C24	823.00	1111.00	3000	277	9	20	SINGLE
WF3003	660.00	890.00	WF3003T	701.00	946.00	WF3003C	WF3003C24	788.00	1064.00	3000	347	9	20	SINGLE
---	---	---	WF3005T	735.00	993.00	WF3005C	WF3005C24	823.00	1111.00	3000	480	9	20	SINGLE
---	---	---	WF3006T	735.00	993.00	WF3006C	WF3006C24	823.00	1111.00	3000	600	10	22	SINGLE
WF4008	491.00	662.00	WF4008T	532.00	718.00	WF4008C	WF4008C24	619.00	836.00	4000	208	9	20	SINGLE
WF4002	491.00	662.00	WF4002T	532.00	718.00	WF4002C	WF4002C24	619.00	836.00	4000/3000	240/208	9	20	SINGLE
WF4007	730.00	985.00	WF4007T	771.00	1040.00	WF4007C	WF4007C24	858.00	1158.00	4000	277	9	20	SINGLE
WF4003	695.00	938.00	WF4003T	735.00	993.00	WF4003C	WF4003C24	823.00	1111.00	4000	347	9	20	SINGLE
---	---	---	WF4005T	771.00	1040.00	WF4005C	WF4005C24	858.00	1158.00	4000	480	9	20	SINGLE
---	---	---	WF4006T	771.00	1040.00	WF4006C	WF4006C24	858.00	1158.00	4000	600	10	22	SINGLE
WF4808	515.00	696.00	WF4808T	558.00	754.00	WF4808C	WF4808C24	650.00	877.00	4800	208	9	20	SINGLE
WF4802	515.00	696.00	WF4802T	558.00	754.00	WF4802C	WF4802C24	650.00	877.00	4800/3600	240/208	9	20	SINGLE
WF4807	766.00	1034.00	WF4807T	809.00	1092.00	WF4807C	WF4807C24	901.00	1216.00	4800	277	9	20	SINGLE
WF4803	729.00	985.00	WF4803T	772.00	1043.00	WF4803C	WF4803C24	864.00	1167.00	4800	347	9	20	SINGLE
---	---	---	WF4805T	809.00	1092.00	WF4805C	WF4805C24	901.00	1216.00	4800	480	9	20	SINGLE
---	---	---	WF4806T	809.00	1092.00	WF4806C	WF4806C24	901.00	1216.00	4800	600	10	22	SINGLE
---	---	---	WF6008CT	1267.00	1710.00	WF6008C	WF6008C24	1226.00	1655.00	6000	208	18	40	DOUBLE
---	---	---	WF6002T	1138.00	1536.00	WF6002C	WF6002C24	1226.00	1655.00	6000/4500	240/208	18	40	DOUBLE
---	---	---	WF6007T	1488.00	2009.00	WF6007C	WF6007C24	1575.00	2127.00	6000	277	18	40	DOUBLE
---	---	---	WF6003T	1488.00	2009.00	WF6003C	WF6003C24	1575.00	2127.00	6000	347	18	40	DOUBLE
---	---	---	WF6005T	1488.00	2009.00	WF6005C	WF6005C24	1575.00	2127.00	6000	480	20	44	DOUBLE
---	---	---	WF6006T	1488.00	2009.00	WF6006C	WF6006C24	1575.00	2127.00	6000	600	20	44	DOUBLE
---	---	---	WF60083CT*	1267.00	1710.00	WF60083C*	WF60083C24*	1226.00	1655.00	6000	208	36	80	TRIPLE
---	---	---	WF60053CT*	1616.00	2182.00	WF60053C*	WF60053C24*	1575.00	2127.00	6000	480	36	80	TRIPLE
---	---	---	WF60063CT*	1616.00	2182.00	WF60063C*	WF60063C24*	1575.00	2127.00	6000	600	36	80	TRIPLE
---	---	---	WF8008CT	1348.00	1820.00	WF8008C	WF8008C24	1307.00	1765.00	8000	208	18	40	DOUBLE
---	---	---	WF8002CT	1348.00	1820.00	WF8002C	WF8002C24	1307.00	1765.00	8000/6000	240/208	18	40	DOUBLE
---	---	---	WF8007CT	1832.00	2474.00	WF8007C	WF8007C24	1792.00	2419.00	8000	277	18	40	DOUBLE
---	---	---	WF8003CT	1832.00	2474.00	WF8003C	WF8003C24	1792.00	2419.00	8000	347	18	40	DOUBLE
---	---	---	WF8005CT	1832.00	2474.00	WF8005C	WF8005C24	1792.00	2419.00	8000	480	20	44	DOUBLE
---	---	---	WF8006CT	1832.00	2474.00	WF8006C	WF8006C24	1792.00	2419.00	8000	600	20	44	DOUBLE
---	---	---	WF90083CT*	1839.00	2483.00	WF90083C*	WF90083C24*	1798.00	2428.00	9000	208	36	80	TRIPLE
---	---	---	WF90053CT*	2405.00	3247.00	WF90053C*	WF90053C24*	2364.00	3192.00	9000	480	36	80	TRIPLE
---	---	---	WF90063CT*	2405.00	3247.00	WF90063C*	WF90063C24*	2364.00	3192.00	9000	600	36	80	TRIPLE
---	---	---	WF12008CT	2014.00	2719.00	WF12008C	WF12008C24	1973.00	2664.00	12000	208	36	80	TRIPLE
---	---	---	WF12002CT	2014.00	2719.00	WF12002C	WF12002C24	1973.00	2664.00	12000/9000	240/208	36	80	TRIPLE
---	---	---	WF12007CT	2580.00	3483.00	WF12007C	WF12007C24	2539.00	3428.00	12000	277	36	80	TRIPLE
---	---	---	WF12003CT	2580.00	3483.00	WF12003C	WF12003C24	2539.00	3428.00	12000	347	36	80	TRIPLE
---	---	---	WF12005CT	2580.00	3483.00	WF12005C	WF12005C24	2539.00	3428.00	12000	480	36	80	TRIPLE
---	---	---	WF12006CT	2580.00	3483.00	WF12006C	WF12006C24	2539.00	3428.00	12000	600	36	80	TRIPLE
---	---	---	WF120083CT*	2014.00	2719.00	WF120083C*	WF120083C24*	1973.00	2664.00	12000	208	36	80	TRIPLE
---	---	---	WF120053CT*	2580.00	3483.00	WF120053C*	WF120053C24*	2539.00	3428.00	12000	480	36	80	TRIPLE
---	---	---	WF120063CT*	2580.00	3483.00	WF120063C*	WF120063C24*	2539.00	3428.00	12000	600	36	80	TRIPLE


Add W for white, SW for silica white, S for silver or SS for stainless steel (or consult the optional colour chart and contact your °STELPRO representative for all other colours)

* Three-phase unit


--- not available

THROW DISTANCE AND HEAT RISE


UNITS	THROW DISTANCE		HEAT RISE	
KW	M	FT.	°C	°F
1.5	4.1	13'7"	30	53
2	4.1	13'7"	42	75
3	4.1	13'7"	61	110
4	4.1	13'7"	74	133
4.8	4.1	13'7"	93	167
6	4.1	13'7"	61	110
8	4.1	13'7"	74	133
9	4.1	13'7"	61	110
12	4.1	13'7"	74	133

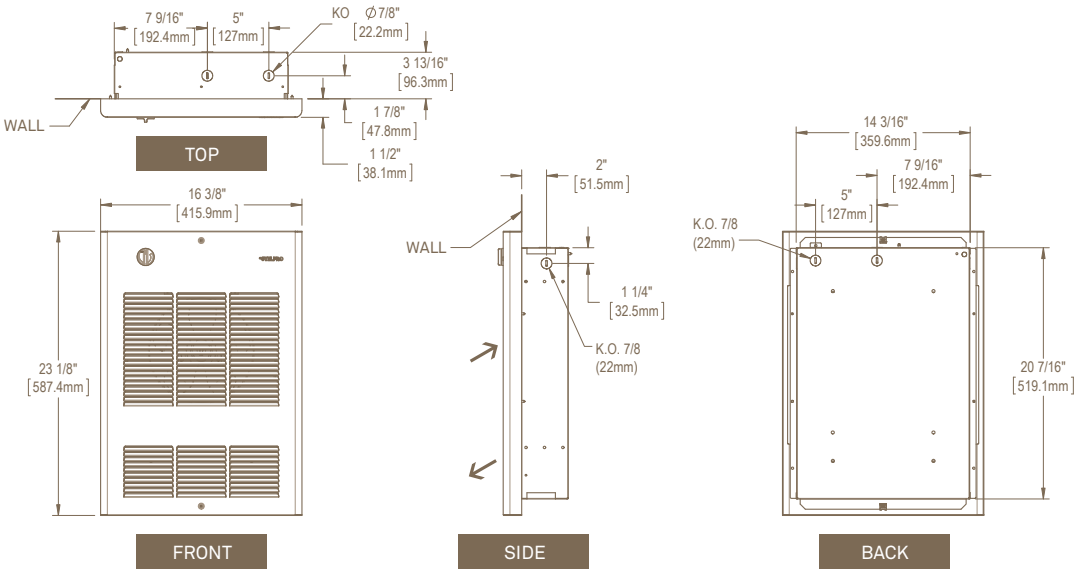

SINGLE UNIT

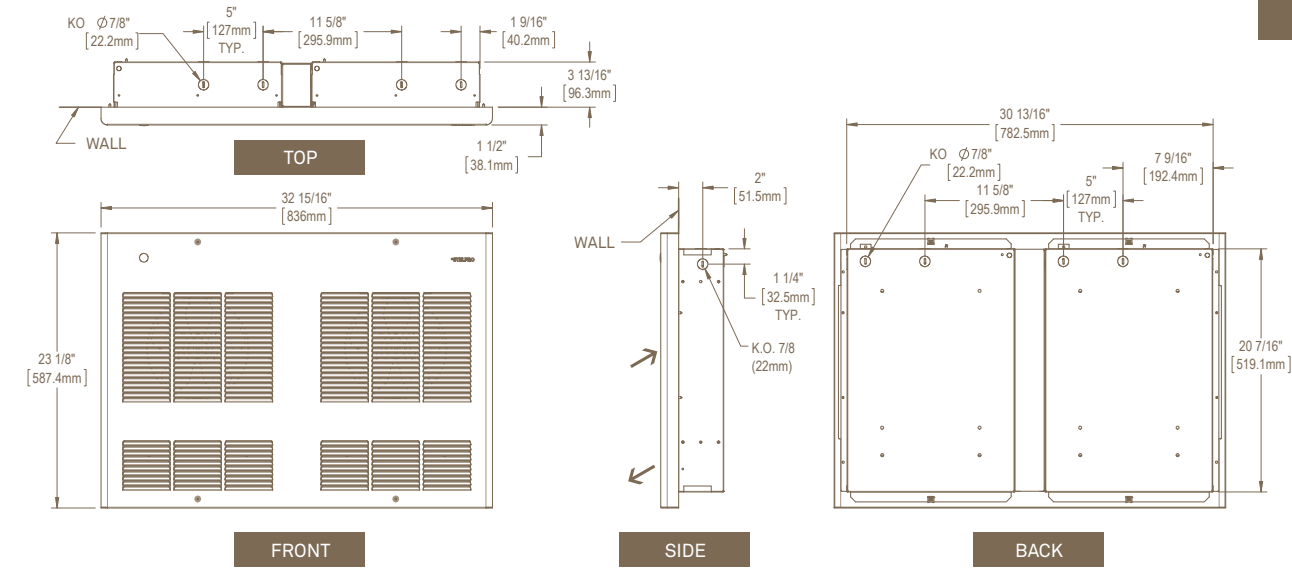

DOUBLE UNIT

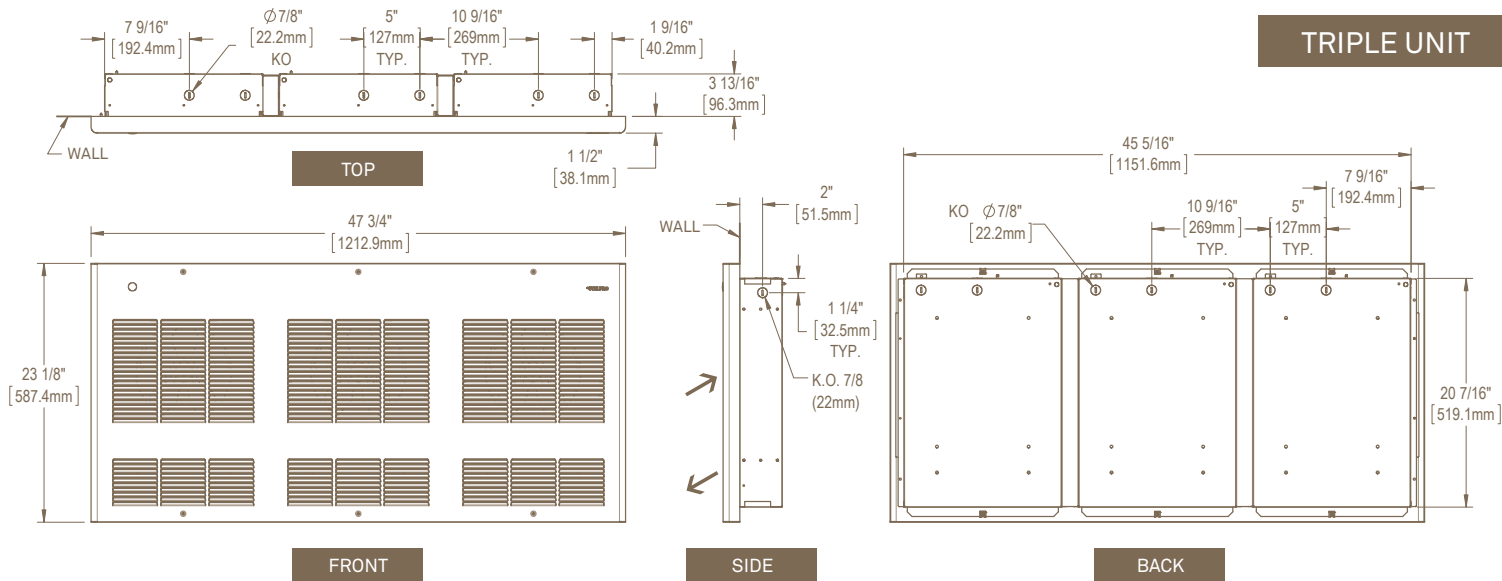

TRIPLE UNIT