


Long Barrel - Two Hole Tongue with Closed Transition

Type BBLU-D

- Manufactured from high conductivity seamless copper tubing
- Tin-plated to inhibit corrosion
- Beveled entry for easy cable insertion
- Closed transition protects end of cable from environmental conditions
- Two hole mounting pad assures maximum secureness
- Long barrel provides high pull out force and added secureness for improved mechanical and electrical properties
- Color coded barrels are marked with die index numbers
- Connectors are suitable for voltages up to 35 KV
- 45° and 90° angles are UL listed and CSA certified
- **Connectors are UL listed and CSA certified with Penn-Union, Burndy, T&B, Huskie, Greenlee and Versa-Crimp® style tooling**

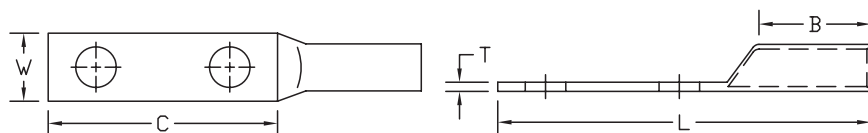

F

BBLU-D DIMENSIONS & INSTALLATION TOOLING INFORMATION

CATALOG NUMBER	COPPER CONDUCTOR SIZE	STUD HOLE SIZE	FIGURE DIMENSIONS (IN.)						INSTALLATION TOOLING				WIRE STRIP LENGTH
			STUD HOLE SPACING	TONGUE WIDTH "W"	TONGUE LENGTH "C"	TONGUE THICKNESS "T"	BARREL LENGTH "B"	OVERALL LENGTH "L"	COLOR CODE	PENN-UNION DIELESS MECHANICAL TOOLS	BURNDY DIE INDEX NO. /TOOL	PENN-UNION DIE CATALOG NO.	
BBLU-8D-2TC14	8 AWG	1/4"	.63	.41	1.22	.08	.94	2.44	Red	TDM-250 or TDM-500	6	T-49	1"
BBLU-8D-2TC14E2		1/4"	.75	.41	1.36	.08	.94	2.58					
BBLU-8D-2TC38E3		3/8"	.81	.56	1.83	.06	.94	3.05					
BBLU-8D-2TC38		3/8"	1.00	.56	1.83	.06	.94	3.05					
BBLU-6D-2TC14	6 AWG	1/4"	.63	.41	1.22	.09	1.13	2.60	Blue	TDM-250 or TDM-500	7	T-7	1-3/16"
BBLU-6D-2TC14E2		1/4"	.75	.41	1.36	.09	1.13	2.74					
BBLU-6D-2TC38E2		3/8"	.75	.61	1.58	.07	.94	2.74		-	Y644HS	-	1"
BBLU-6D-2TC38E3		3/8"	.81	.61	1.83	.06	1.13	3.21		TDM-250 or TDM-500	7	T-7	1-3/16"
BBLU-6D-2TC38		3/8"	1.00	.61	1.83	.06	1.13	3.21					
BBLU-6DN		1/2"	1.75	.70	2.77	.09	1.00	3.92		-	Y644HS	-	1-1/16"
BBLU-5D-2TC14	5 AWG	1/4"	.63	.44	1.22	.08	1.13	2.60	Blue	TDM-250 or TDM-500	7	T-7	1-3/16"
BBLU-5D-2TC14E2		1/4"	.75	.44	1.36	.08	1.13	2.74					
BBLU-5D-2TC38E2		3/8"	.75	.61	1.58	.07	1.13	2.96					
BBLU-5D-2TC38E3		3/8"	.81	.61	1.83	.07	1.13	3.21					
BBLU-5D-2TC38		3/8"	1.00	.61	1.83	.07	1.13	3.21					
BBLU-4D-2TC14	4 AWG	1/4"	.63	.50	1.22	.09	1.13	2.60	Gray	TDM-250 or TDM-500	8	T-8	1-1/4"
BBLU-4D-2TC14E2		1/4"	.75	.50	1.36	.09	1.13	2.74					
BBLU-4D-2TC38E2		3/8"	.75	.61	1.56	.08	1.13	2.96					
BBLU-4D-2TC38E3		3/8"	.81	.61	1.83	.08	1.13	3.21					
BBLU-4D-2TC38		3/8"	1.00	.61	1.81	.08	1.13	3.21					
BBLU-4D1		1/2"	1.75	.92	3.00	.10	1.13	4.38					