

P.V.C. Plastic Insulated Sleeve

12-10 WIRE RANGE


.040 Stock

B


PVC (Butted Seam) terminals and splices feature a rigid Polyvinyl Chloride (PVC) insulation sleeve permanently attached to butted barrel (in #22-10) or (in #22-2). Attaches to wire with one quick crimp. Insulation sleeve prevents vibration damage by not allowing wire flex at point of crimp. Funnel wire entrance into electrical barrel eliminates wire strand "hang-up", increases crimping rates and wire termination reliability*. Operating Temperature Range: continuous duty from -67°F to 221°F (-55°C to 105°C).

* Step construction provides ideal locator for proper crimping.

** Temp Rating 75°C

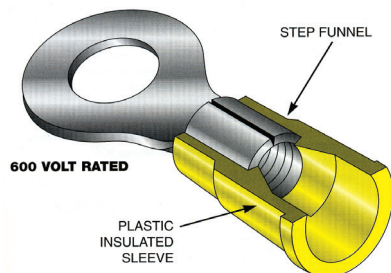

Copper Stranded Wire Only




For Locking Styles contact Techspan

Terminals are NOT Actual Size See Sizing Chart on B-38, B-39

Stud Size Part Number




4-6 R4C6S




4-6 R4C6



6-8 R4C8S



6-8 R4C8



8-10 R4C10



12-1/4 R4C14S



1/4-5/16 R4C56S



1/4-5/16 R4C56



5/16-3/8 R4C38

Stud Size Part Number



4-6 BS4C6



8 BS4C8



10 BS4C10




12 BSF4C10



B4C**



P4C Parallel



DIMENSIONAL CHART		
Part Number	W	L
B4C		1.069"
BS4C10	0.323"	1.062"
BS4C14	0.356"	0.998"
BS4C6	0.321"	1.051"
BS4C8	0.323"	1.060"
P4C		0.831"
R4C10	0.377"	1.056"
R4C12	0.757"	1.513"
R4C14S	0.531"	1.221"
R4C38	0.589"	1.327"
R4C56	0.589"	1.320"
R4C56S	0.531"	1.224"
R4C6	0.376"	1.056"
R4C6S	0.286"	1.012"
R4C8	0.378"	1.053"
R4C8S	0.284"	1.022"

Terminals accept .250" Max. Wire Ins. Dia.



Add suffix "M" for 1000 pack

Add suffix "P" for Pro Pack (Quantities vary by Part #)

Approved installation tool: See tool chart pages E-2,3,4

Economy installation tools: RAT-PVC, 453, HTS1000

See pages E-2 to E-4 for installation tools.