


## LIQUID TIGHT CONNECTORS - NYLON/PVC

### Straight and Right Angle Non-Metallic Connectors

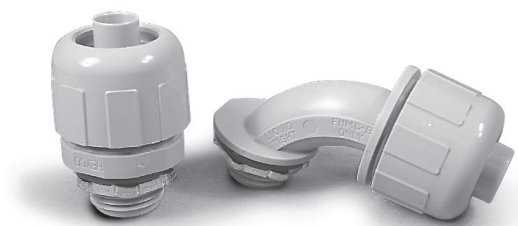

- UV rated
- Four Sizes for 3/8" to 2" Conduit
- No Disassembly Required to Install. Simply push Conduit or Tubing over Ferrule and tighten Sealing Nut
- No Threading of Conduit is Necessary. Lower your Installed Cost
- Connector may be reused. Turn Sealing Nut in Clockwise direction to Release Conduit
- Molded 6/6 Nylon. Non-Conductive, Non-Corrosive; Resistant to Fuels, Lubricants and most Chemicals

#### Straight Connector

| Black Connector with 'O' Ring & Steel Locknut Part # | Grey Connector with 'O' Ring & Steel Locknut Part # | For Conduit | Thread Size | K.O. Size Inch | CTN/PKG | STD PK |
|------------------------------------------------------|-----------------------------------------------------|-------------|-------------|----------------|---------|--------|
| CCNY2500                                             |                                                     | 1/4         | 1/4 NPT     | 1/4            | 25      | 100    |
| CCNY3750                                             | CCNY3758                                            | 3/8         | 1/2 NPT     | 1/2            | 25      | 100    |
| CCNY5000                                             | CCNY5008                                            | 1/2         | 1/2 NPT     | 1/2            | 25      | 100    |
| CCNY7500                                             | CCNY7508                                            | 3/4         | 3/4 NPT     | 3/4            | 10      | 100    |
| CCNY10000                                            | CCNY10008                                           | 1           | 1 NPT       | 1              | 5       | 50     |
| CCNY12500                                            | CCNY12508                                           | 1-1/4       | 1-1/4 NPT   | 1-1/4          | 5       | 25     |
| CCNY15000                                            | CCNY15008                                           | 1-1/2       | 1-1/2 NPT   | 1-1/2          | 2       | 10     |
| CCNY20000                                            | CCNY20008                                           | 2           | 2 NPT       | 2              | 2       | 10     |

#### 90° Connector

| Black Part # | Grey Part # | For Conduit | Thread Size | K.O. Size Inch | CTN/PKG | STD PK |
|--------------|-------------|-------------|-------------|----------------|---------|--------|
| CCNY37900    | CCNY37908   | 3/8         | 1/2 NPT     | 1/2            | 10      | 100    |
| CCNY50900    | CCNY50908   | 1/2         | 1/2 NPT     | 1/2            | 10      | 100    |
| CCNY75900    | CCNY75908   | 3/4         | 3/4 NPT     | 3/4            | 10      | 100    |
| CCNY10900    | CCNY10908   | 1           | 1 NPT       | 1              | 5       | 50     |
| CCNY125900   | CCNY125908  | 1-1/4       | 1-1/4 NPT   | 1-1/4          | 5       | 25     |
| CCNY150900   | CCNY150908  | 1-1/2       | 1-1/2 NPT   | 1-1/2          | 2       | 10     |
| CCNY200900   | CCNY200908  | 2           | 2 NPT       | 2              | 2       | 10     |

### Combination Straight – 90° Swivel Connector

\*\*One connector does every angle !!



| Grey Part # | For Conduit                     | Thread Size | K.O. Size Inch | QTY/ BOX |
|-------------|---------------------------------|-------------|----------------|----------|
| CCSW5008    | N.M. Swivel L.T. Con. 1/2" GREY | 1/2 NPT     | 1/2            | 10       |
| CCSW7508    | N.M. Swivel L.T. Con. 3/4" GREY | 3/4 NPT     | 3/4            | 10       |
|             | SCREW-ON PVC RUBBER O-RING      |             |                |          |

also available in black on request



### Screw-On Straight and 90° Non-Metallic Connectors

For use with non-metallic liquid-tight conduit, type B.  
Produced from UV rated plastic for long outdoor life.



| Straight Grey Connector with 'O' Ring & Steel Locknut Part # | 90° Grey Connector with 'O' Ring & Steel Locknut Part # | For Conduit | Thread Size | K.O. Size Inch | STD PK |
|--------------------------------------------------------------|---------------------------------------------------------|-------------|-------------|----------------|--------|
| NMSC50                                                       | NMSC9050                                                | 1/2         | 1/2 NPT     | 1/2            | 100    |
| NMSC75                                                       | NMSC9075                                                | 3/4         | 3/4 NPT     | 3/4            | 100    |

