


INSULATED TWIN FERRULES

Ferrules are a convenient device used for termination of stranded wires. Ferrules eliminate the risk of fraying single strands and consequential accidental contacts and short circuits. They also protect the wire from damage when using compression screw, spring, or split-bolt type connectors.

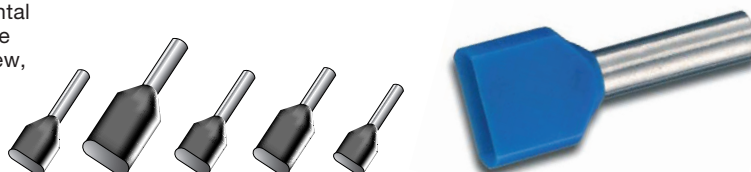


Polypropylene Insulated Twin Ferrules

Rated at 600V Max, 105°C

Colour DIN	Part-No.	AWG	Size mm ²	d1	d2	d3	l1	l2	s1	s2	Pack Unit	Approved Tool V Series	CRIMP TOOLS		
													RAT-FER	SPR-FER	RAT-FER2
	FER2-22-8D	2 x 22	2 x 0.50	1.40	2.50	4.70	15.00	8.00	0.15	0.25	500	V915	●		
	FER2-20-8D	2 x 20	2 x 0.75	1.70	2.80	5.00	15.00	8.00	0.15	0.25	500	V915	●		
	FER2-20-10D	2 x 20	2 x 0.75	1.70	2.80	5.00	17.00	10.00	0.15	0.25	500	V915	●		
	FER2-18-8D	2 x 18	2 x 1.00	1.95	3.40	5.40	15.00	8.00	0.15	0.30	500	V915	●		
	FER2-18-10D	2 x 18	2 x 1.00	1.95	3.40	5.40	17.00	10.00	0.15	0.30	500	V915	●		
	FER2-16-8D	2 x 16	2 x 1.50	2.20	3.60	6.60	16.00	8.00	0.15	0.30	500	V915	●	●	
	FER2-16-12D	2 x 16	2 x 1.50	2.20	3.60	6.60	20.00	12.00	0.15	0.30	500	V915	●	●	
	FER2-14-10B	2 x 14	2 x 2.50	2.80	4.20	7.80	18.50	10.00	0.20	0.30	250	V915		●	
	FER2-14-13B	2 x 14	2 x 2.50	2.80	4.20	7.80	21.50	13.00	0.20	0.30	250	V915		●	
	FER2-12-12C	2 x 12	2 x 4.00	3.70	4.90	8.80	23.00	12.00	0.20	0.40	100	V925			
	FER2-10-14C	2 x 10	2 x 6.00	4.80	6.90	10.00	26.00	14.00	0.20	0.40	100	V925			
	FER2-8-14C	2 x 8	2 x 10.00	6.40	7.20	13.00	26.00	14.00	0.20	0.40	100	V940			●
	FER2-6-14L	2 x 6	2 x 16.00	8.20	9.60	18.40	30.00	14.00	0.20	0.40	50	V940			●

See Page E-5 for tools.

For Copper Stranded Wire Only

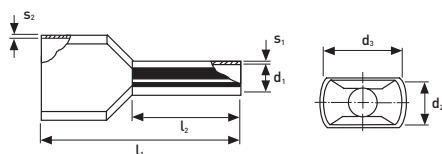

Technical Information

Insertion Funnel is made of Polypropylene and is heatresistant up to 105 Deg. C. Material: E-Copper, Surface electro tinned. Minimum Coating Thickness 3µm. Rated at 600V Max
Tolerances: after part 4