




THREADED ADAPTERS



Tuff-Seal™ Threaded Adapters easily convert – or mate – one thread style with another. These adapters are offered with both internal and external threads that mate NPT with ISO Metric style fittings or NPT with Pg fittings. They are constructed of machined aluminum with electroless-nickel plating for enhanced protection against corrosion, friction and contamination. The threaded adapters also incorporate a BUNA-N O-Ring to provide a liquid-tight seal. This product family meets ASTM, MIL and AMS specifications.

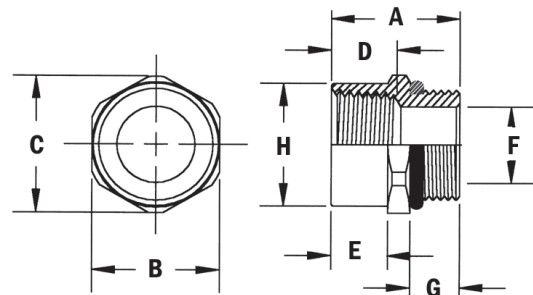

"M" (ISO) METRIC THREADED ADAPTERS

PART NUMBERS										
Part Number	External Thread	Internal Thread	A	B Hex	C	D	E	F Dia.	G	H Dia.
M16-38	M16 X 1.5	3/8 NPT	1.000	.875	.970	.400	.435	.455	.390	.830
M16-50	M16 X 1.5	1/2 NPT	1.000	1.000	1.090	.510	.445	.455	.390	.980
M20-50	M20 X 1.5	1/2 NPT	1.000	1.000	1.090	.510	.445	.610	.390	.980
M25-50	M25 X 1.5	1/2 NPT	1.000	1.250	1.375	.520	.400	.625	.390	1.180
M25-75	M25 X 1.5	3/4 NPT	1.000	1.250	1.375	.520	.400	.800	.390	1.180
M32-75	M32 X 1.5	3/4 NPT	1.000	1.375	1.530	.520	.400	.800	.390	1.180
M32-100	M32 X 1.5	1 NPT	1.250	1.437	1.600	.680	.635	.990	.390	1.430
M32-125	M32 X 1.5	1-1/4 NPT	1.280	2.000	2.220	.700	.635	.937	.390	1.850
M40-100	M40 X 1.5	1 NPT	1.250	2.000	2.220	.680	.635	1.060	.390	1.430
M40-125	M40 X 1.5	1-1/4 NPT	1.280	2.000	2.220	.700	.635	1.320	.390	1.850
M50-150	M50 X 1.5	1-1/2 NPT	1.280	2.250	2.475	.700	.635	1.500	.390	2.190

Pg Threaded Adapters (On next page)