


OVERLOAD RELAYS


Specifications

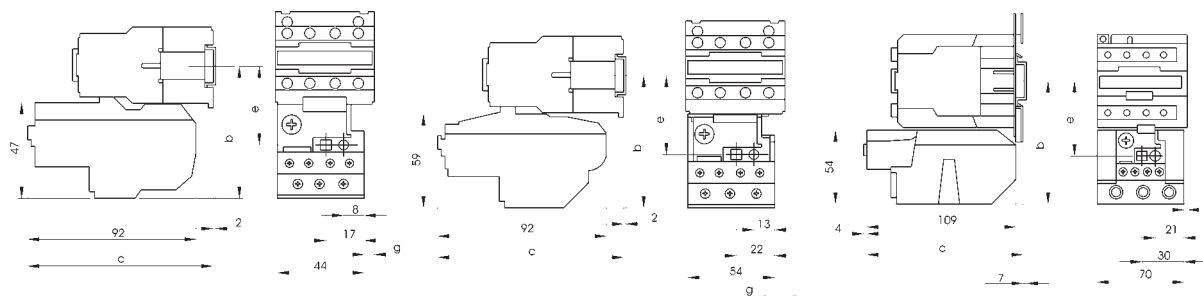

TR2D09301-D25322				
Mounting With	b	c	e	g
TC1 D09, D12, D18	81	98	W	0
TP1 DC09, DC12				
TC1 D25 / TP1 DC25	86	108	55	10.7
TC1 D32	86	109	55	8.1
TP1 D09, D12, D18	81	133	50	0
TP1 D25	86	152	55	10.7
TP1 D32	86	153	55	8.1

TR2D32353-32355				
Mounting With	b	c	e	g
TC1 D25/TP1 DC25	97.5	98	60	1.5
TC1 D32	97.5	98	60	0.5
TP1 D25	97.5	155	60	1.5
TP1 D32	97.5	155	60	0.5

TR2D40355-D95365				
Mounting With	b	c	e	g
TC1 D40	111	119	72.4	4.5
TC1 D50	111	119	72.4	4.5
TC1 D65	111	119	72.4	4.5
TC1 D80	115.5	123.4	76.9	9.5
TC1 D95	115.5	123.4	76.9	9.5
TP1 D40	111	176	72.4	4.5
TP1 D50	111	176	72.4	4.5
TP1 D65	111	176	72.4	4.5
TP1 D80	115.5	179.4	76.9	9.5

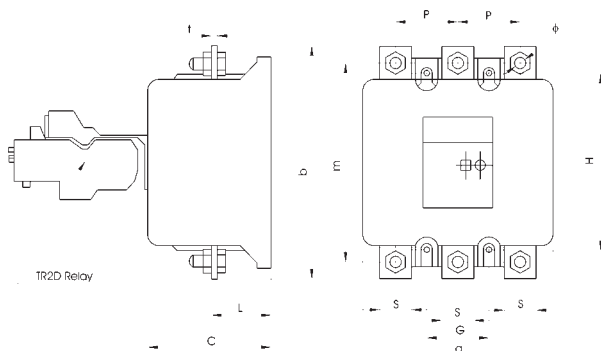

LR1-F	a	b	C	G	H	L	M	P	S	Φ	t
105	126	160	81	40	110	56	140	40	20	9	3
					120						
125	126	160	81	40	110	56	140	40	20	9	3
					120						
160	126	160	81	40	110	56	140	140	20	9	3
					120						
200	126	160	81	40	110	56	140	140	20	9	3
					120						
250	171	182	120	49	140	44.5	157	48	25	11	4
315	171	182	120	49	140	44.5	157	48	25	11	4
400	171	182	120	49	140	44.5	157	48	25	11	4
500	171	194	120	49	140	44.5	164	55	25	11	5
630	171	194	120	49	140	44.5	164	55	30	11	5

