

UEI Accessories


TEST INSTRUMENTS™



ATTPC: Pipe Clamp Adapter

TEST LEADS


AAC	Push-on alligator clips with insulators for pointed test leads, 1 pair
AAC3	Screw-on alligator clips, 1 pair
ATL1	Standard Test Lead Tips
ATL2	Alligator Test Lead Tips
ATL3	Grabber Test Lead Tips
ATL4	Remote Alligator Test Lead Tips
ATL5	Back Probe Test Lead Tips
ATL6	Piercing Test Lead Tips
ATL55	UL listed insulated test leads for industry standard multimeters
ATL55A	UL CAT IV insulated test lead set, industry standard (G2 Phoenix)
ATL59	UL listed insulated test leads with alligator clips for Phoenix Clamp Meter Series™ (DL269 / DL279 / DL289)
ATL60	Test lead, microwave diode booster for all DMM (except DM5B)
ATL85	Vinyl insulated test leads for M1K, M20, M30
ATL190	Kelvin clip leads for CLM100 & CLM100B
ATL301KIT	ATLTX, ATL1, ATL2, ATL3, AC12
ATL501KIT	ATLTX, ATL1, ATL2, ATL3, ATL5, ATL6, AC12
ATLBPK	Back Probe Test Lead Kit (ATLTX, ATL5, AC12)
ATLFT	Fused Probe Test Leads Tips
ATLTX	Test Lead Kit Extension Wire
ALS2	Line Splitter with 4" Cord
ATHA1	Gas Valve Thermocouple Adapter
DLMAT2	MicroAmp Adapter for DMMs

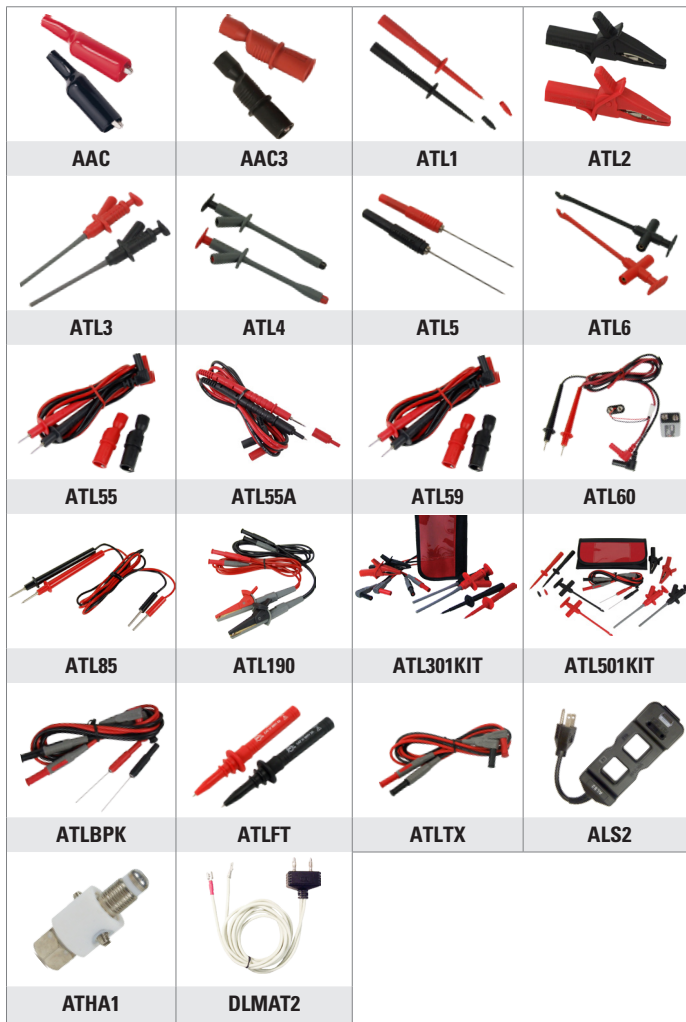

K-TYPE TEMPERATURE PROBES

Work with: DTK2, DT221, DT222, INF195, DL379, DL389, C125, C127, C155, C157, C091, C095, DT301, DT302, DT304.

ATT29	4' Standard fiber glass coated (-40° to 950°F / -40° to 510°C)
ATT29A	4' Standard Fluoroplastic coated (-40° to 950°F / -40° to 510°C)
ATT29APACK	10 PACK 4' Standard Fluoroplastic coated
ATT36	8" Surface probe and handle (-40° to 950°F / -40° to 510°C)
ATT39	Storable Temperature probe for the DT301, DT302, DT304 (-40° to 950°F / -40° to 510°C)
ATT50	8" Liquid probe & handle (-40° to 1,550°F / -40° to 850°C)
ATT70	Temperature plug adapter for DMMs. DL259, DL289, DL279, DL269, DM397, DM393, UTL33T
ATT100	6" Liquid probe and handle (-40° to 950°F / -40° to 510°C)
ATTPC	Pipe clamp adapter for use with K-type inputs
ATTPC2	Clamp style adapter for use with K-type inputs
ATTEXT	10' Extension for K-type thermocouples

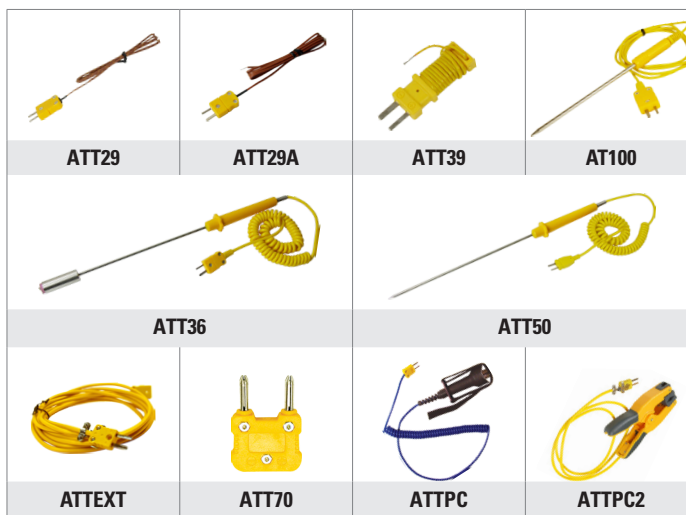


Accessories

J-TYPE TEMPERATURE PROBES

Work with: DT221, DT222, DT301, DT302, DT304.

ATT19	Oven clip, flat blade 48" cord. (-40°-950°F / -40°-510°C)
ATT26	Liquid probe and 48" cord. (-40°-1,550°F / -40°-850°C)
ATT27	4' Standard bead probe. (-40°-950°F / -40°-510°C)
ATT30	8" Liquid probe & handle. (-40°-1,550°F / -40°-850°C)

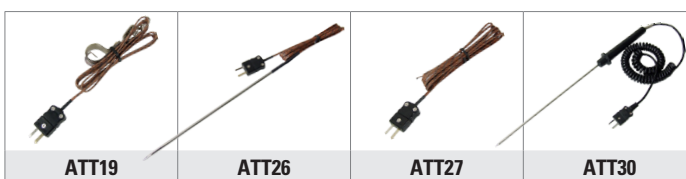

THERMISTORS

Work with: DT15A, DT20A.

ATT31	4' External temperature probe for the DTH31. (-4° to 158°F / -20° to 70°C)
ATT55A	4" Liquid temperature probe with 30" cord. DT20A, DT15A
ATT56A	4" Air temperature probe with 30" cord. DT20A, DT15A
ATT57A	4" Surface temperature probe with 30" cord. DT20A, DT15A
ATT58A	Sealed probe with 15' cord. DT20A, DT15A
ATT62	Sealed probe with 15' cord. DT40 (-40° to 300°F / -40° to 150°C)
ATT64	Air probe with 15' cord for the DT40. (-40° to 300°F / -40° to 150°C)
ATTPC3	Clamp style adapter with thermistor input



CARRYING CASES

AC12	Test lead case (4 x 7 x 0.25")
AC73	Soft carrying case (15 x 12 x 3")
AC75	Large soft carrying case (18 x 12 x 3")
AC504	Hard carrying case (12.5 x 7.5 x 3.5")
AC506	Large hard carrying case (16 x 11 x 3.75")
AC509	Eagle hard carrying case (19 x 14 x 3.5")
AC319	Soft carrying case (5.5 x 7.5 x 2.5")
AC519	Soft carrying case (5.5 x 10.5 x 2.5")



CAN'T FIND WHAT YOU'RE LOOKING FOR?...

UEi offers a full line of HVAC/R and Combustion Testing equipment. We have grouped our products specifically to make it easy to find what you're looking for. Here are a few related products and data sheets. For a complete list visit: www.ueitest.com

Product Part # or Group	LIT #
Catalog	L144
Combustion & Environmental Catalog	L330
Digital Multimeters	L332
Digital Clamp Meters	L333
Electrical Testing Equipment	L342
Digital Temperature Testers	L352
Humidity and Air Flow	L353

USA
1-800-547-5740 • Fax: (503) 643-6322

www.ueitest.com • Email: info@ueitest.com
8030 SW Nimbus Ave.
Beaverton, OR 97008

Copyright © 2014 UEi

CANADA
1-877-475-0648 • Fax: (604) 278-8299

www.ueitest.com • Email: info@ueitest.com
150-13571 Verdun Place
Richmond, B.C. V6V 1W5

EUROPE
+44 1707 375550 • Fax: +44 1707 393277



L322 IMAG454 2.5K 04/14