

QS-style Coupling Nipple

Submittal Information

Revision A: April 25, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:


Submitted By:

Manufacturer's Representative:

Approved By:

Technical Data

Fitting:	CA 360 Brass
Maximum Temperature (no pressure):	220°F (104°C)
Maximum Pressure:	125 psi

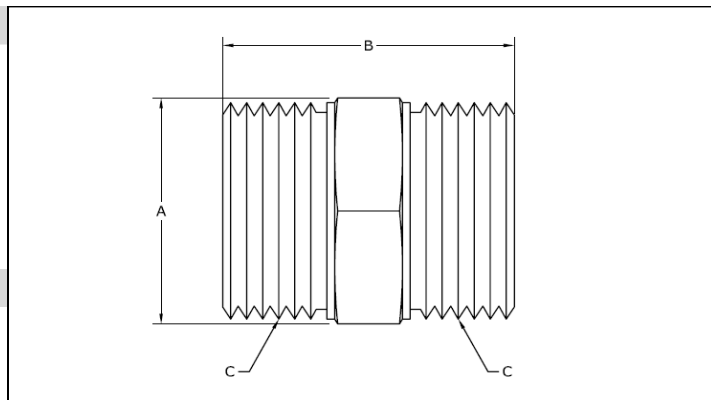

Product Information and Application Use

The Uponor QS-style Nipple fittings are available in R20 and R25 thread. They are used with compression fittings to repair Wirsbo hePEX™ plus tubing in radiant heating applications. R25 is for ¾" tubing only.

✓ Description	Part Number	A	B	C	Weight
QS-style Coupling Nipple, R20 x R20	A4322020	1.30"	0.68"	R20	0.17 lbs.
QS-style Coupling Nipple, R25 x R25 (for ¾" tubing only)	A4322525	1.60"	0.98"	R25	0.30 lbs.

Installation

Corresponding QS-style fitting assembly threads onto QS-style Coupling Nipple fitting for repairs. For more information, refer to the Uponor Radiant Installation Handbook.

Standards

ASTM F877

Codes

N/A

Listings

NSF-rfh; R20: ISO 228-G ¾" B; R25: ISO 228-G 1" B

Related Applications

Radiant Heating and Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca