

Tube Talon


Submittal Information
Revision C: Oct. 28, 2011

Project Information

Job Name:	
Location:	Part No. Ordered:
Engineer:	Date Submitted:
Contractor:	Submitted By:
Manufacturer's Representative:	Approved By:

Technical Data

Material: F7050375: Polypropylene (PP)
F7050750: High-density polyethylene (HDPE)
F7051000: Polypropylene (PP)

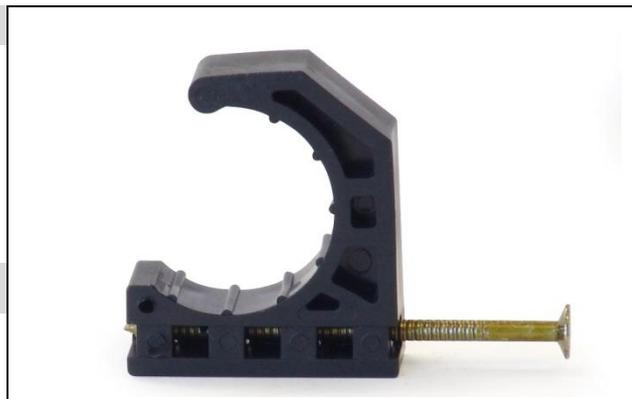

Product Information and Application Use

Tube Talon secures 3/8", 1/2", 5/8", 3/4" and 1" Uponor crosslinked polyethylene (PEX) tubing products. Fasteners are included.

✓	Description	Part Number	Length	Width	Weight (Bag)
<input type="checkbox"/>	Tube Talon (3/8" PEX), 100/pkg.	F7050375	1.75"	0.75"	0.76 lbs.
<input type="checkbox"/>	Tube Talon (1/2", 5/8", 3/4" PEX), 100/pkg.	F7050750	2.00"	1.55"	1.60 lbs.
<input type="checkbox"/>	Tube Talon (1" PEX), 50/pkg.	F7051000	2.38"	1.66"	1.13 lbs.

Installation

Mount the tube talon over the tubing and mounting surface. Attach the tube talon to desired surface with the nail provided. Refer to the Uponor Radiant Floor Installation Handbook or the Uponor Professional Plumbing Installation Guide for additional information.

Standards

N/A

Codes

N/A

Listings

N/A

Related Applications

Radiant Heating and Cooling Systems
Snow and Ice Melting Systems
Permafrost Protection Systems
Turf Conditioning Systems
PEX-a Plumbing Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponorpro.com

Uponor Ltd.
2000 Argentia Road, Plaza 1, Suite 200
Mississauga, ON L5N 1W1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponorpro.com