

ProPEX® to Copper Ball Valve

Submittal Information

Revision A: Feb. 12, 2008

Project Information

Job Name:

Location:

Part No. Ordered:

Engineer:

Date Submitted:

Contractor:

Submitted By:

Manufacturer's Representative:


Approved By:

Technical Data

Material:	CA 360 Brass
Maximum Working Temperature:	250°F (121°C)
Maximum Working Pressure:	250 psi

Product Information and Application Use

The Uponor ProPEX® to Copper Ball Valves feature in-line isolation valves.¹

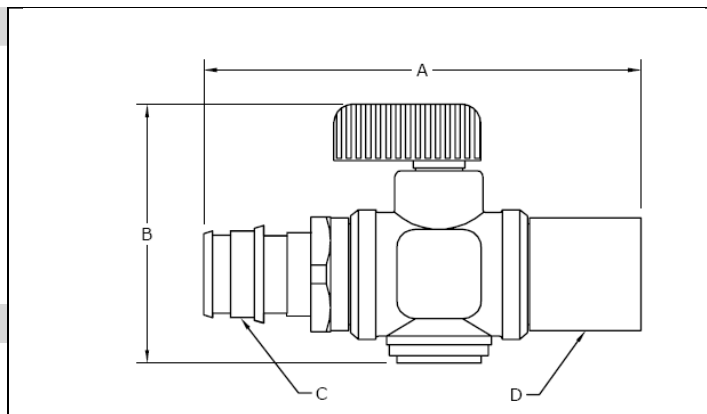

✓ Description	Part Number	A	B	C	D	Weight
ProPEX Ball Valve (large bore), 1/2" PEX x 1/2" Copper Adapter	Q5805050	2.32"	1.67"	1/2"	1/2" Cu	0.30 lbs.
ProPEX Ball Valve (small bore), 1/2" PEX x 1/2" Copper Adapter	Q4835050	2.47"	1.63"	1/2"	1/2" Cu	0.30 lbs.
ProPEX Ball Valve, 3/8" PEX x 3/4" Copper Adapter	Q5806375	3.19"	1.81"	3/8"	3/4" Cu	0.50 lbs.
ProPEX Ball Valve, 3/4" PEX x 3/4" Copper Adapter	Q5807575	3.43"	1.67"	3/4"	3/4" Cu	0.50 lbs.

Installation

Install valve according to local building code. Do not dismantle. If soldering, aim flame away from fitting. For more information, refer to the Uponor AQUAPEX® Professional Plumbing Installation Handbook or Uponor Radiant Installation Handbook.

Standards

CSA 137.5; B125; ASTM F877; ASTM F1960

Codes

IPC; UPC; NPC of Canada

Listings

IAPMO 3960; NSF 61- and 9-certified

Related Applications

PEX-a Plumbing Systems
Radiant Floor Heating Systems
Radiant Cooling Systems

Contact Information

Uponor, Inc.
5925 148th Street West
Apple Valley, MN 55124 USA
Phone: (800) 321-4739
Fax: (952) 891-2008
www.uponor-usa.com

Uponor Ltd.
655 Park Street
Regina, SK S4N 5N1 CANADA
Phone: (888) 994-7726
Fax: (800) 638-9517
www.uponor.ca

¹ProPEX® is a registered trademark of Uponor, Inc. ProPEX™ is a trademark of Uponor Ltd.