

## Viega ProPress® Ball Valve Model 2973.3

### Description

Viega ProPress model 2973.3 is a full port ball valve intended for hydronic and non-potable applications. The ball valve features EPDM sealing elements, EPDM stem seals and Viega's Smart Connect® feature for easy identification of unpressed connections during pressure testing.

### Features

- Chrome-plated brass ball
- Blowout-proof stem
- Reinforced PTFE seats
- Smart Connect feature
- Press x garden hose connections
- Hose cap is full pressure rated

### Ratings


- 250 CWP
- Temperature range: 0°F - 250°F
- Max. operating pressure: 200 psi

### Approvals

- Conforms to MSS SP-110
- NSF-U.P. Code
- IGC 157



Component	Material
Body	Brass C37700
Ball	Chrome-plated Brass
Seat	Reinforced PTFE
Stem	Brass C37700
Stem Seals	EPDM
Nut	Zinc-plated Steel
Handle	Zinc-plated Steel
Handle Cover	Polyvinyl
Sealing Element	EPDM

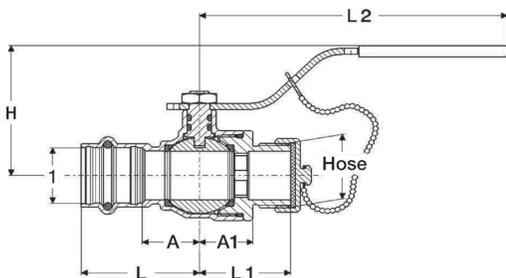

Part Number	1 x Hose	A (in)	A1 (in)	L (in)	L1 (in)	L2 (in)	H (in)
24090	1/2" x 3/4"	0.83	0.85	1.58	1.30	3.89	1.67
24095	3/4" x 3/4"	0.95	0.95	1.86	1.39	4.72	1.97

**NOTE:** Model 2973 is for use in non-potable applications. For NSF-61G compliant valves refer to Viega ProPress model 2971.6ZL.

Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**

This document subject to updates. For the most current Viega technical literature please visit [www.viega.us](http://www.viega.us).

Viega LLC • 585 Interlocken Blvd. • Broomfield, CO 80021 • Phone (800) 976-9819 • [www.viega.us](http://www.viega.us)