

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

LEAD FREE*

Series LFFHB Frost-Proof Automatic Self-Draining Wall Hydrants

Sizes: 1/2" x 3/4"


Series LFFHB Frost-Proof Automatic Self-Draining Wall Hydrants are designed to provide freeze protection of the external water supply as well as backflow protection to the potable water supply. LFFHB hydrants feature a solid brass construction with a nickel plated finish, a 0.8mm thick copper tube, a plastic vacuum breaker, a heavy metal handle, and can be repaired inline without removing the sill cock from the waterline. These hydrants are designed to ASSE Standard 1019 and are certified to CSA B125 and CSA B64.2.

Features

- Frost-proof design drains automatically
- Plastic vacuum breaker prevents contamination of the potable water supply from backsiphonage and backpressure
- ASSE Standard 1019, IAPMO listed
- Metal handle
- 0.8mm copper tube thickness, thicker wall than competitors
- Size, length indication printed on cap for easy field service or repair
- 3/4" hose connection

Specifications

A frost-proof automatic self-draining wall hydrant shall be installed where indicated in the plans. Hydrant to be manufactured with lead free* brass body with nickel-plated finish, plastic vacuum breaker mechanism, metal handle, and 0.8mm copper tube wall thickness. Hydrant shall have either a copper, IPS, or PEX inlet with 3/4" hose outlet. Hydrant shall be a Watts Series LFFHB.

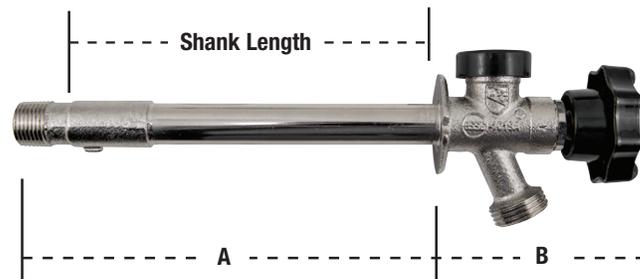

LFFHB-1

Models

LFFHB-1 - For wall sizes: 4" – 14" (100 – 350mm), 1/2" solder or 1/2" male IPS inlet

LFFHB-1-PEX - For wall sizes: 4" – 12" (100 – 300mm), 1/2" PEX inlet

Standards — Approvals

ASSE Std. 1019, CSA-B125 and CSA B64.2



NOTICE


The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

*The wetted surface of this product contacted by consumable water contains less than 0.25% of lead by weight.

Repair Kits


MODEL	DESCRIPTION	CONTENTS
FHB-V-RK 1/2 – 3/4	Vacuum breaker repair kit	Bonnet O-ring, disc, and vent float
RK-FHB	Check assembly repair kit	Check sub-assembly, check spring and stem packing

Dimensions – Weights

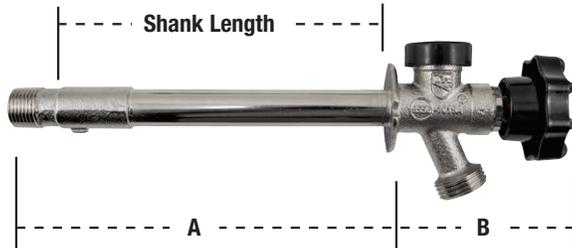

LFFHB-1

MODEL	SHANK LENGTH		DIMENSIONS				WEIGHT	
	<i>in.</i>	<i>mm</i>	A		B		<i>lbs.</i>	<i>kgs.</i>
Inlet 1/2" solder or 1/2" male IPS								
LFFHB-1	4	100	5 1/2	139.5	3 15/32	88.1	2.4	1.1
LFFHB-1	6	150	7 1/2	190.5	3 15/32	88.1	2.6	1.2
LFFHB-1	8	200	9 1/2	241.5	3 15/32	88.1	2.8	1.3
LFFHB-1	10	250	11 1/2	292.5	3 15/32	88.1	3.0	1.4
LFFHB-1	12	300	13 1/2	343.5	3 15/32	88.1	3.2	1.5
LFFHB-1	14	350	15 1/2	394.5	3 15/32	88.1	3.4	1.5

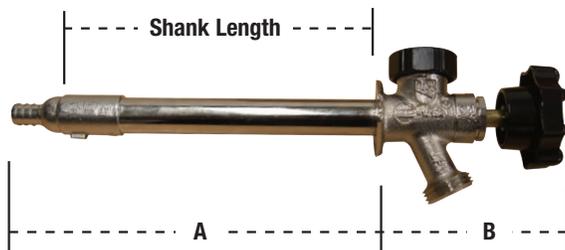

LFFHB-1-PEX

MODEL	SHANK LENGTH		DIMENSIONS				WEIGHT	
	<i>in.</i>	<i>mm</i>	A		B		<i>lbs.</i>	<i>kgs.</i>
Inlet 1/2" PEX								
LFFHB-1-PEX	4	100	6 7/16	164	3 15/32	88.1	2.4	1.1
LFFHB-1-PEX	6	150	8 7/16	241	3 15/32	88.1	2.6	1.2
LFFHB-1-PEX	8	200	10 7/16	265	3 15/32	88.1	2.8	1.3
LFFHB-1-PEX	10	250	12 7/16	316	3 15/32	88.1	3.0	1.4
LFFHB-1-PEX	12	300	14 7/16	367	3 15/32	88.1	3.2	1.5

