


Case Material: AISI 304 stainless steel
Lens Material: Polycarbonate
Ring: AISI 304 stainless steel, crimp-on
Socket: Brass
Tube: Phosphor bronze
Movement: Brass
Accuracy: ±1.6%
Ambient Temperature Limits: -14°F to 158°F (-25°C to 70°C)
Process Temperature Limits: -14°F to 158°F (-25°C to 70°C)
Enclosure Rating: IP65

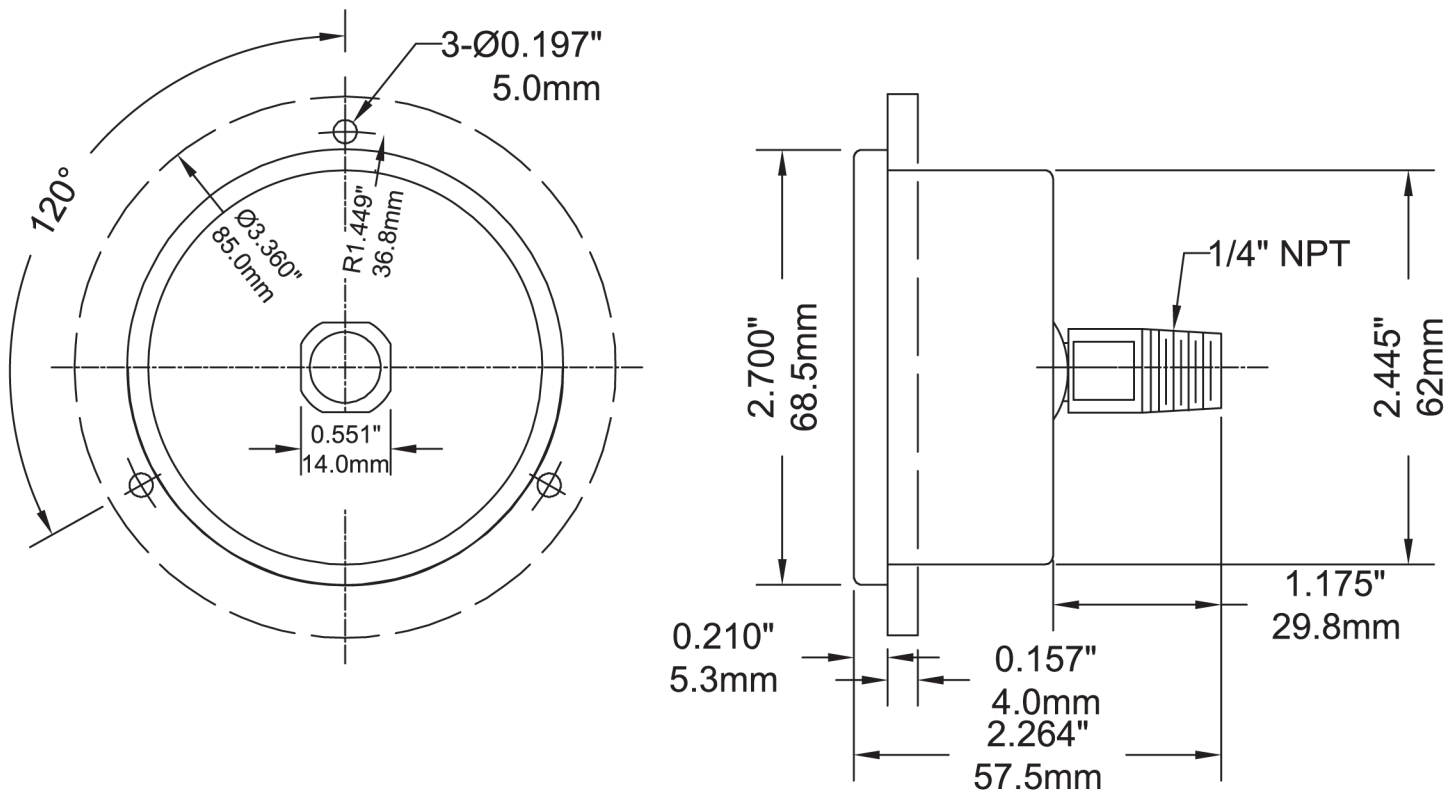

DRAWN BY: PHOEBE MA

ENG. APPROVAL:

David Reay

Digitally signed by David Reay
DN: cn=David Reay, c=CA, o=Toronto,
st=Ontario, ou=Winters Instruments,
email=dreay@winters.com
Reason: I am approving this document
Date: 2009.02.17 15:33:26 -0500

ALL DIMENSIONS IN INCHES/MM

TOLERANCES
(unless otherwise stated)

Fractional:	1/64" 0.4mm
Decimal:	0.06" 1.5mm

REVISION DATE: Jan. 08, 2009

TITLE:

STABILIZER GAUGE , BACK CONN, C/W
FRONT FLANGE OPTION

DRAWING NO: PFQ-ZR-25-T-B-F