


## 4481 Piston Type Water Hammer Arrestor

Regularly Furnished: Seamless copper Shokstop (water hammer arrestor) with polypropylene piston, EPDM and NPT threaded connection.

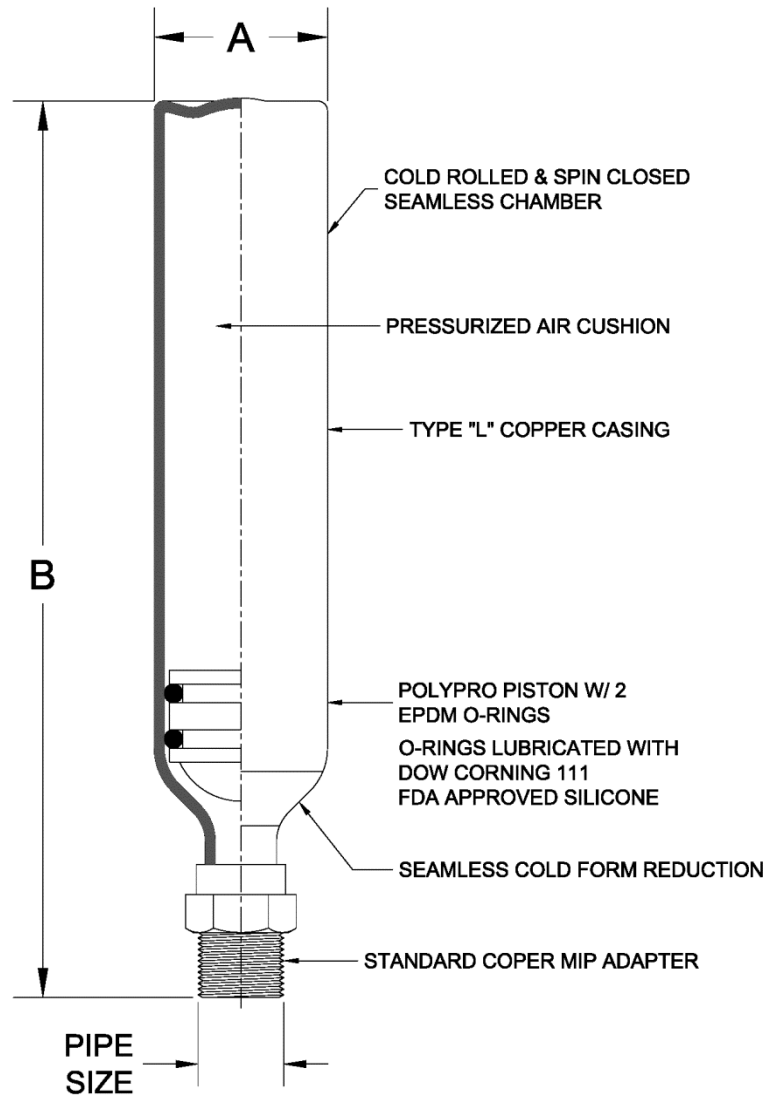

| ✓ | PDI Size | Fixture Units | Pipe Size | A          | B            |
|---|----------|---------------|-----------|------------|--------------|
|   | A        | 1-11          | ½" (13)   | 1-3/8 (35) | 6-1/2 (165)  |
|   | B        | 12-32         | ¾" (19)   | 1-3/8 (35) | 8-3/4 (222)  |
|   | C        | 33-60         | 1" (25)   | 1-3/8 (35) | 11 (279)     |
|   | D        | 61-113        | 1" (25)   | 2-1/8 (54) | 10-1/8 (257) |
|   | E        | 114-154       | 1" (25)   | 2-1/8 (54) | 12-5/8 (320) |
|   | F        | 155-330       | 1" (25)   | 2-1/8 (54) | 15-1/8 (384) |

| Options |        |                           |
|---------|--------|---------------------------|
| ✓       | Suffix | Description               |
|         | -BAA   | Buy America Act Compliant |

### Materials / Specifications

- Piston: Polypropylene
- Case: Cold Rolled Spin Closed Type L Copper
- O-Rings: EPDM (Lubricated w/ FDA Approved Silicon)
- Charge: Air
- Max Temperature: 250°F
- Max Operating Pressure: 350 PSIG
- Size A,B,C Certified by PDI WH-201 Standard