


**SI-742-L**


Tag: \_\_\_\_\_

**Sediment & Hair Interceptor**

**SPECIFICATION:** Watts Drainage SI-742-L floor mounted or recessed epoxy coated steel large capacity sediment interceptor with gasketed epoxy coated steel skid-proof cover secured with hex head center bolt, removable stainless steel dual chamber basket, and 2" (51) no hub connections. Maximum flow rate 30 GPM.

**NOTE:** SI-742-L requires 17" (432) clearance above cover to remove sediment basket.

Options (Select One or More)		
Suffix	Description	
-E	Extension	<input type="checkbox"/>
-O	Inlet & Outlet other than Standard	<input type="checkbox"/>
-SS	All Stainless Steel	<input type="checkbox"/>
-THD	IPS Threaded Connections	<input type="checkbox"/>
-US	Buy American Compliant 	<input type="checkbox"/>

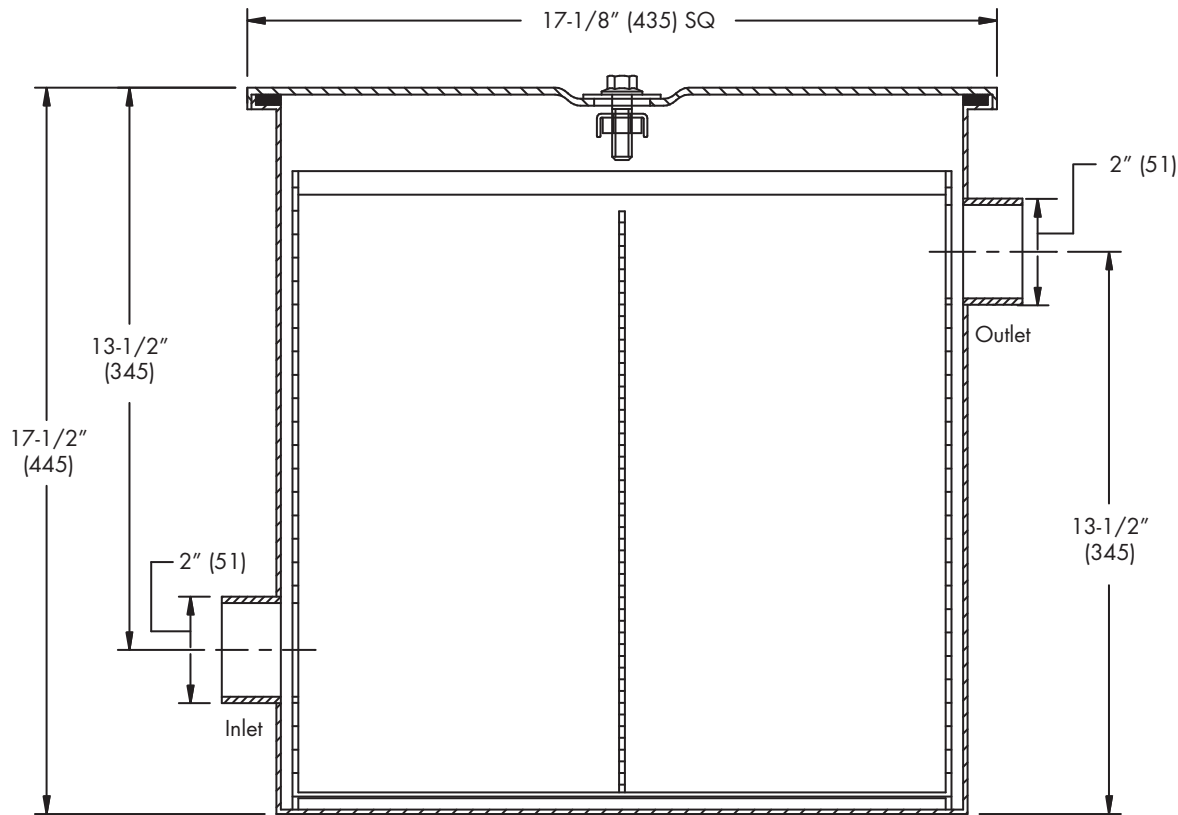

Job Name \_\_\_\_\_

Contractor \_\_\_\_\_

Job Location \_\_\_\_\_

Contractor's P.O. No. \_\_\_\_\_

Engineer \_\_\_\_\_

Representative \_\_\_\_\_

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.

**USA:** Tel: (800) 338-2581 • Fax: (828) 248-3929 • Watts.com

**Canada:** Tel: (905) 332-4090 • Fax: (905) 332-7068 • Watts.ca

**Latin America:** Tel: (52) 81-1001-8600 • Fax: (52) 81-8000-7091 • Watts.com

*A Watts Water Technologies Company*