


Product Specification

LEAD FREE*

Features ■

- Lead Free* brass body and checkstops for durability and to comply with Lead Free* installation requirements.
- Valve utilizes paraffin-based advanced thermal actuation technology to sense and adjust outlet temperature
- Dirt and lime resistant poppet and seat design
- Virtual shutoff if supply pressure fails
- Vandal-resistant locking mechanism to secure temperature setting
- Factory tested
- Rotatable union triple-duty checkstops
- Rough bronze and chrome finishes

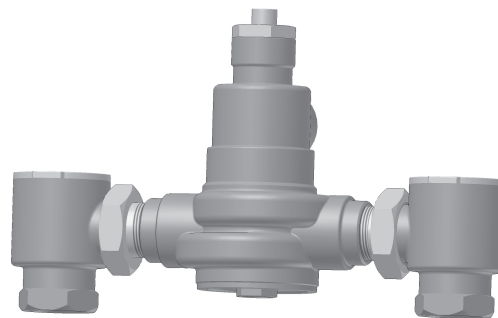

Advanced Thermal Activation

Specifications ■

Connections..... See chart on reverse

Maximum Hot Water Supply Temperature ... 200°F (93°C)

Minimum Hot Water Supply Temperature 5°F (3°C) above set point**

Minimum Flow*** 0.5 gpm (1.9 lpm)

Maximum Operating Pressure 125 psi (861 kPa)

Temperature Adjustment Range Standard 90 – 160°F (32 – 71°C)
Low 60 – 90°F (16 – 32°C)

Hot Water Inlet Temperature Range 120 – 180°F (49 – 82°C)

Cold Water Inlet Temperature Range 40 – 80°F (4 – 27°C)

* The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.


** With equal pressure

*** Minimum flow when the valve is installed at or near hot water source w/recirculated tempered water with a properly sized continuously operating recirculating pump

Capacity ■

Flow Capacity at 50-50 Mixed Ratio									
		Pressure Drop Across Valve							
Model	Min. Flow to ASSE 1017	Cv	5psi (34 kPa)	10psi (69 kPa)	20psi (138 kPa)	30psi (207 kPa)	45psi (310 kPa)	60psi (414 kPa)	70psi (517 kPa)
LFSH1432	1 gpm 4 lpm	8.54	19 gpm 72 lpm	27 gpm 102 lpm	38 gpm 144 lpm	47 gpm 178 lpm	57 gpm 216 lpm	66 gpm 250 lpm	71 gpm 269 lpm
LFSH1434	1 gpm 4 lpm	19.00	42 gpm 159 lpm	60 gpm 227 lpm	85 gpm 322 lpm	104 gpm 394 lpm	127 gpm 481 lpm	147 gpm 556 lpm	159 gpm 602 lpm
LFSH1435	5 gpm 19 lpm	30.00	67 gpm 254 lpm	95 gpm 341 lpm	134 gpm 507 lpm	164 gpm 621 lpm	201 gpm 761 lpm	232 gpm 878 lpm	251 gpm 950 lpm

Dimensions ■

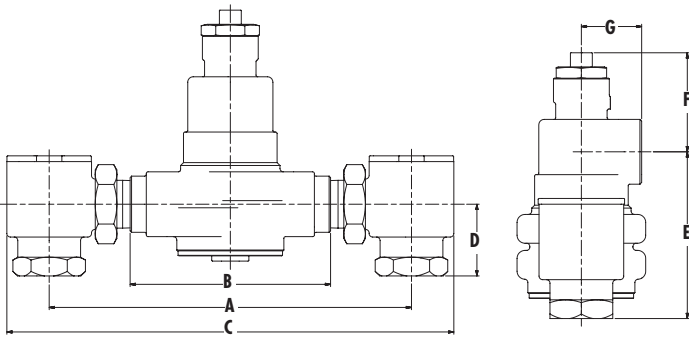

Valve	A	B	C	D	E	F	G
LFSH1432	9-7/16"	4-3/4"	11-5/8"	1-7/8"	4"	3-1/4"	1-5/8"
	(240)	(121)	(295)	(48)	(102)	(83)	(41)
LFSH1434	12-1/4"	7"	15-1/4"	2-1/2"	5-3/4"	3-1/2"	2-1/16"
	(311)	(178)	(387)	(64)	(146)	(89)	(52)
LFSH1435	15-5/8"	7-1/8"	19-1/4"	2-3/4"	7-7/8"	4-3/8"	2-3/8"
	(397)	(181)	(489)	(70)	(200)	(111)	(60)

Valve	Inlets NPT	Outlet NPT
LFSH1432	3/4"	1"
LFSH1434	1-1/4"	1-1/2"
LFSH1435	2"	2"

Note:
Dimensions are shown $\pm 1/4"$
Dimensions in brackets are in mm.

Ordering Information ■



Valve

57 gpm (216 lpm)	LFSH1432
127 gpm (481 lpm)	LFSH1434
201 gpm (761 lpm)	LFSH1435

Finish/Temperature Range

Rough Brass, Standard	1
Chrome Plated, Standard	2
Rough Brass, Low	3
Chrome Plated, Low	4

Temperature/Pressure Gauge on Outlet

None	0
For LFSH1432, Rough Brass	1
For LFSH1432, Chrome Plated	2
For LFSH1434, Rough Brass	3
For LFSH1434, Chrome Plated	4
For LFSH1435, Rough Brass	5
For LFSH1435, Chrome Plated	6

Recirculation Piping Diagram ■

Please see Piping Diagram Section of this catalog.

Typical Specification ■

Single-valve Hi/Lo shall feature paraffin-based, thermal actuation technology for precise temperature control. Valve shall be listed to ASSE 1017 and CSA B125 and have an approach temperature of 5°F (3°C). Valve shall have an outlet temperature range from 90° – 160°F (32 – 71°C) with a lockable temperature-setting feature. Valve shall be constructed using Lead Free* brass material which shall comply with state codes and standards, where applicable, requiring reduced lead content and feature a single-seat design for positive shutoff. Valves shall come standard with union check stops. Minimum flows to ASSE 1017 shall be LFSH1432 (1.0 gpm) (4 Lpm), LFSH1434 (1.0 gpm) (4 Lpm), LFSH1435 (5.0 gpm) (19 Lpm).

Single-valve Hi/Lo shall be of Powers Series LFSH1430. Any alternate must have a written approval prior to bidding.

POWERS™

A Watts Water Technologies Company

ENGINEERING APPROVAL

Project: _____
Contractor: _____
Architect/Engineer: _____



ISO 9001-2008
CERTIFIED

USA: Tel: (800) 669-5430 • Fax: (847) 229-0526 • www.powerscontrols.com
Canada: Tel: (888) 208-8927 • Fax: (888) 479-2887 • www.powerscontrols.ca