

# INDEX PAGE for 6" Wide Grates / Covers

 - Click on "Item ID" to go to grate page, "Back to Index" will return you to this page.

P6-AWG .....	Aluminum Wire Grate	P6-NBZ-USA .....	Nickel Bronze Decorative Grate
P6-BCD .....	Circular Decorative, Bronze Grate	P6-PDE-USA .....	Perforated Decorative Grate, Ductile Iron
P6-BDC .....	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P6-PG .....	Fabricated Perforated Grate, Galvanized Steel
P6-BDD .....	Diagonal Decorative, Bronze Grate	P6-PGR .....	Wide Domestic Decorative Grate
P6-BDE .....	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P6-PPC .....	Perforated Plastic Class C Grate, Vinylester
P6-BDE-USA .....	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P6-PS .....	Fabricated Perforated Grate, Stainless Steel
P6-BG .....	Slotted Bar Grate, Galvanized Ductile Iron	P6-PSR .....	Fabricated Raised Perforated Grate, Stainless Steel
P6-BZ .....	Bronze Decorative Grate	P6-RFG .....	Reinforced Slotted Grate, Galvanized Steel
P6-DBG .....	Slotted Bar Grate, Dura-Coated Ductile Iron	P6-RFGC .....	Reinforced Slotted Grate, Galv. Steel & Galv. Ductile Iron
P6-DC .....	Solid Cover, Dura-Coated Ductile Iron	P6-RFSC .....	Reinforced Slotted Grate, Stainless Steel
P6-DCD .....	Circular Decorative Grate, Ductile Iron	P6-RPG .....	Reinforced Perforated Grate, Galvanized Steel
P6-DCE-USA .....	Solid Cover, Dura-Coated Ductile Iron	P6-RPGC .....	Reinforced Perforated Grate, Galvanized Steel & Galvanized Ductile Iron
P6-DDD .....	Diagonal Decorative Grate, Ductile Iron	P6-RPGR .....	Reinforced Perforated Grate, Galvanized Steel
P6-DGC .....	Slotted Grate, Ductile Iron	P6-RPGRC .....	Reinforced Perforated Grate, Galvanized Steel & Galvanized Ductile Iron
P6-DGC-USA .....	Slotted Grate, Ductile Iron	P6-RPSC .....	Reinforced Perforated, Class C Grate, Stainless Steel
P6-DGE .....	Slotted Grate, Ductile Iron	P6-RPSRC .....	Reinforced Perforated Reverse Punch Grate, Stainless Steel
P6-DGE-USA .....	Slotted Grate, Ductile Iron	P6-SBG .....	Cast Bar Grate, Stainless Steel
P6-DOG .....	Ornamental Grate, Ductile Iron	P6-SC .....	Fabricated Stainless Steel Solid Cover
P6-DTW .....	Decorative Tidal Wave Grate, Ductile Iron	P6-SCD .....	Circular Decorative Grate, Stainless Steel
P6-DWV .....	Decorative Wave Grate, Ductile Iron	P6-SDD .....	Diagonal Decorative Grate, Stainless Steel
P6-FG .....	Fabricated Slotted Grate, Galvanized Steel	P6-SMG .....	Stainless Steel Mesh Screen Grate
P6-FS .....	Slotted Grate, Stainless Steel	P6-SOG .....	Stainless Steel Ornamental Grate
P6-GDC .....	Slotted Grate, Galvanized Ductile Iron	P6-SWG .....	Stainless Steel Wire Grate
P6-GDC-USA .....	Slotted Grate, Galvanized Ductile Iron	P886-FGF .....	Frame and Grate, Ductile Iron
P6-GDE .....	Slotted Grate, Galvanized Ductile Iron	P886-FGF-USA .....	Frame and Grate, Ductile Iron
P6-GDE-USA .....	Slotted Grate, Galvanized Ductile Iron	P886-GFG .....	Frame and Grate, Galvanized Ductile Iron
P6-GG .....	Slotted Grate, Vinylester Fiberglass	P886-GFG-USA .....	Frame and Grate, Galvanized Ductile Iron
P6-GHPD .....	Heel-Proof Slotted Grate, Galvanized Ductile Iron	P886-HDD .....	Fixed, Ductile Iron Grate
P6-GHPDE .....	Heel-Proof Slotted Grate, Galvanized Ductile Iron	P886-HR .....	Removable, Ductile Iron Frame and Grate
P6-GHPDE-USA .....	Heel-Proof Slotted Grate, Galvanized Ductile Iron	P886-PVS .....	Paver Slot Grate, Fabricated Steel
P6-GMG .....	Galvanized Mesh Screen Grate	P886-PVSG .....	Paver Slot Grate, Fabricated Galvanized Steel
P6-HPB .....	Heel-Proof Slotted Grate, Bronze	P886-PVSS .....	Paver Slot Grate, Fabricated Stainless Steel
P6-HPD .....	Heel-Proof Slotted Grate, Ductile Iron		
P6-HPDE .....	Heel-Proof Slotted Grate, Ductile Iron		
P6-HPDE-USA .....	Heel-Proof Slotted Grate, Ductile Iron		
P6-HPP .....	Heel-Proof Slotted Grate, High Density Polyethylene (HDPE)		
P6-HPS .....	Heel-Proof Slotted Grate, Stainless Steel		
P6-LD .....	Longitudinal Slotted Grate, Ductile Iron		




# P6-AWG

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	1	94081	P6-AWG

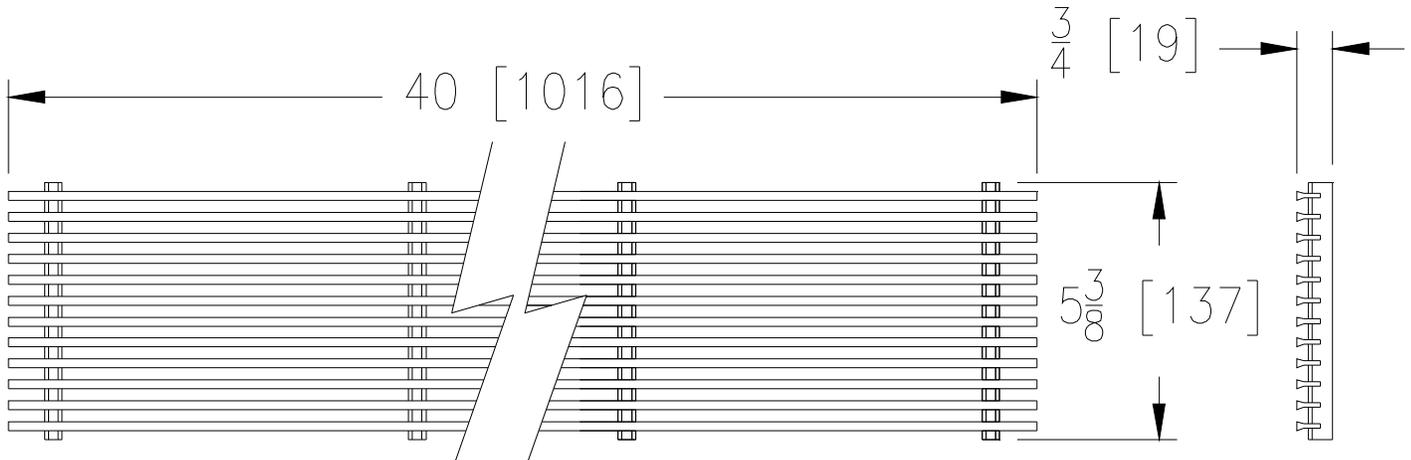

### AWG GRATE ENGINEERING SPECIFICATION: ZURN P6-AWG

40" [1016mm] X 5-3/8" [137mm] Aluminum wire grate, weighing .9 lbs per linear foot [1.3kg./m]. The grate has an open area of 37.5 in<sup>2</sup> per linear foot [794cm<sup>2</sup>/m], DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, Aluminum members conform to ASTM specification 6061 u-chips conform to ASTM specification 5052.



AWG - Wire Grate	
Material:	Aluminum
DIN Rating:	Class A
Weight:	.9 lbs/ft. [1.3kg/m]
Open Area:	37.5 in <sup>2</sup> /ft. [794cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-BCD**  
**6 [152] Wide Decorative Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	2	64255	P6-BCD

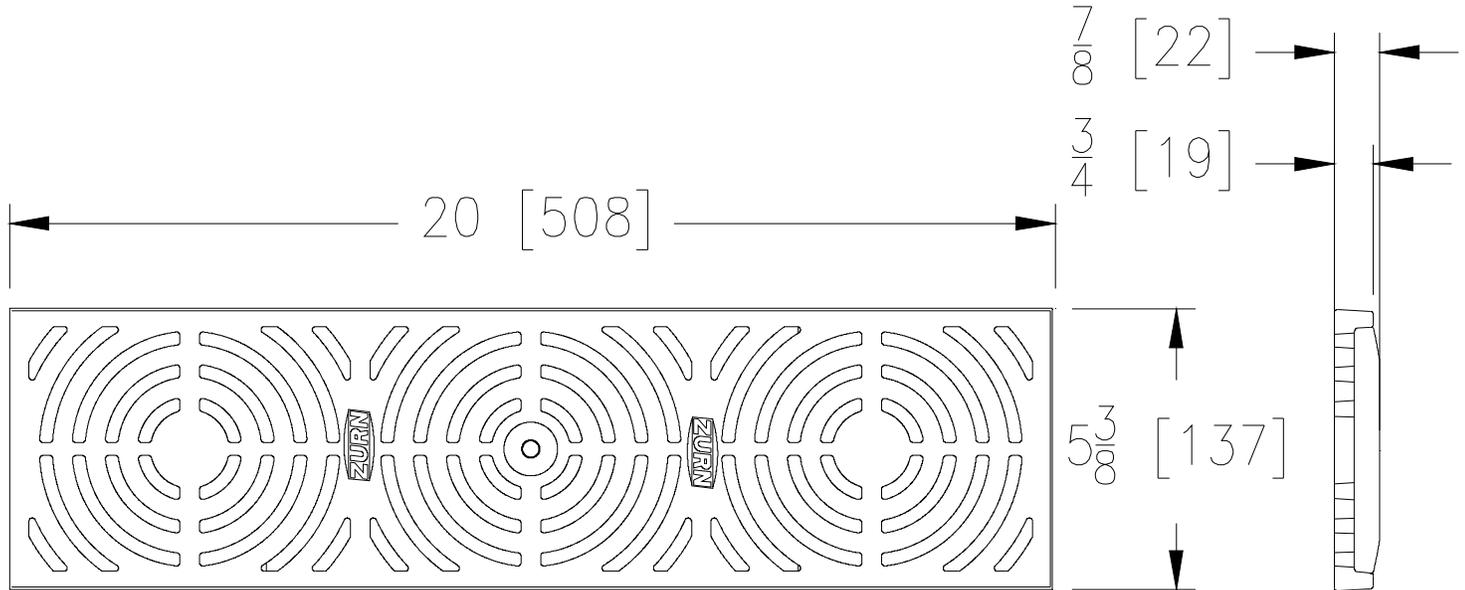

**BCD GRATE ENGINEERING SPECIFICATION: ZURN P6-BCD**

20" [508mm] X 5-3/8" [137mm] Bronze circular decorative grate, weighing 7.8 lbs per linear foot [11.5kg/m]. The grate has an open area of 17.6 in<sup>2</sup> per linear foot [372cm<sup>2</sup>/m]. The grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM B584 Copper Alloy NO. C844.

<b>BCD - Circular Decorative</b>	
Material:	Bronze
DIN Rating:	Class A
Weight:	7.8 lbs/ft. [11.5kg/m]
Open Area:	17.6 in <sup>2</sup> /ft. [372cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-BDC**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	3	94472	P6-BDC

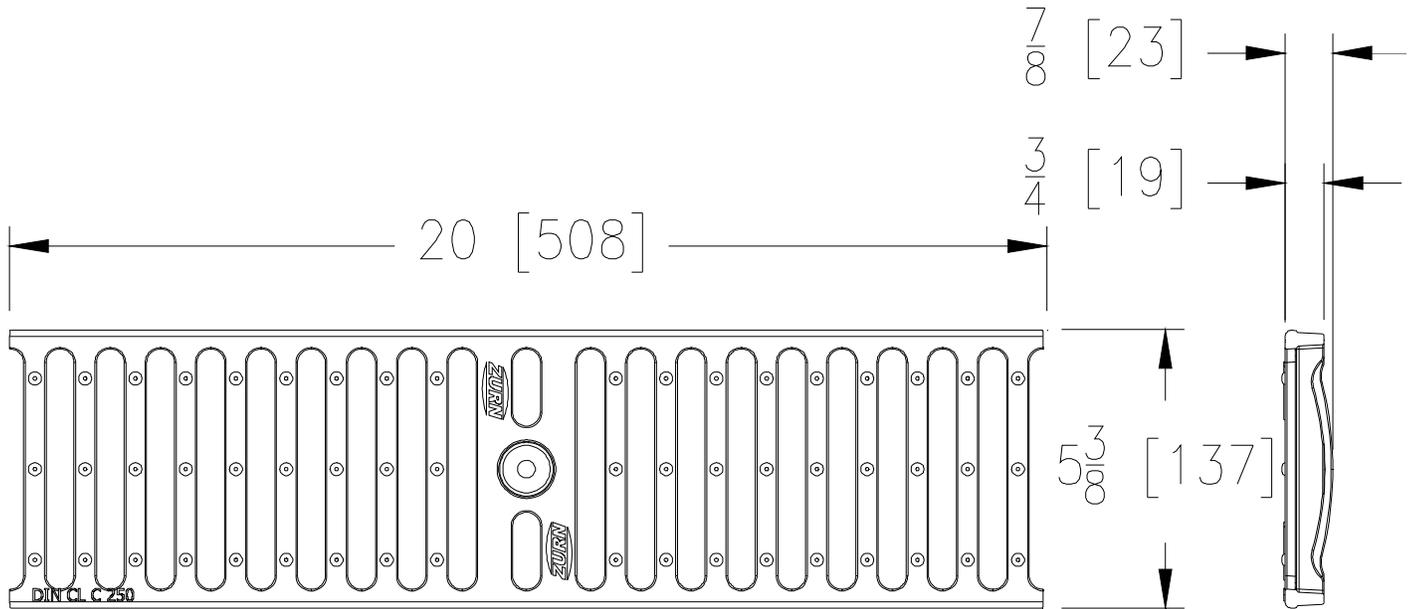

**BDC GRATE ENGINEERING SPECIFICATION: ZURN P6-BDC**

20" [508mm] X 5-3/8" [137mm] Black acid resistant epoxy coated Ductile Iron slotted grate weighing 4.5 lbs per linear foot [6.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

<b>BDC -Black Acid Resistant Ductile</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [6.5kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	No




# P6-BDD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	4	67506	P6-BDD

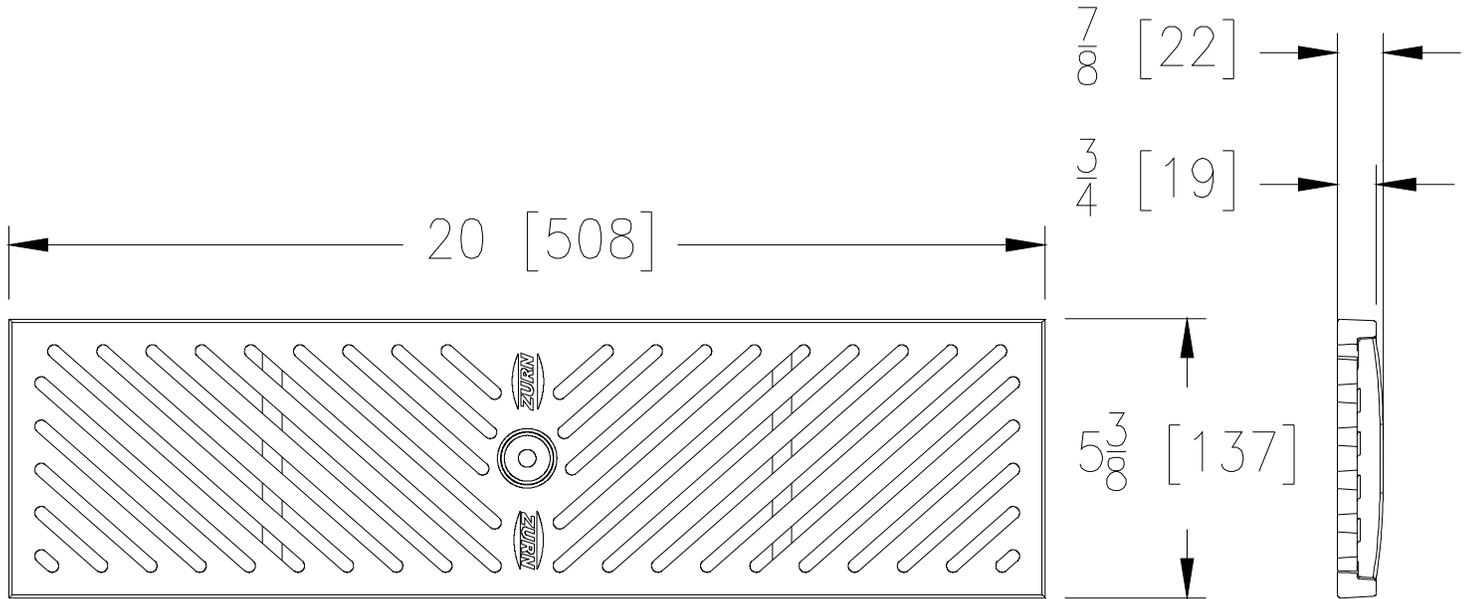

### BDD GRATE ENGINEERING SPECIFICATION: ZURN P6-BDD

20" [508mm] X 5-3/8" [137mm] Bronze diagonal decorative grate, weighing 6.9 lbs per linear foot [10.2kg/m]. The grate has an open area of 17.9 in<sup>2</sup> per linear foot [377cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM B584 Copper Alloy NO. C844.

BDD - Diagonal Decorative	
Material:	Bronze
DIN Rating:	Class A
Weight:	6.9 lbs/ft. [10.2kg/m]
Open Area:	17.9 in <sup>2</sup> /ft. [377cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-BDE**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	5	94473	P6-BDE

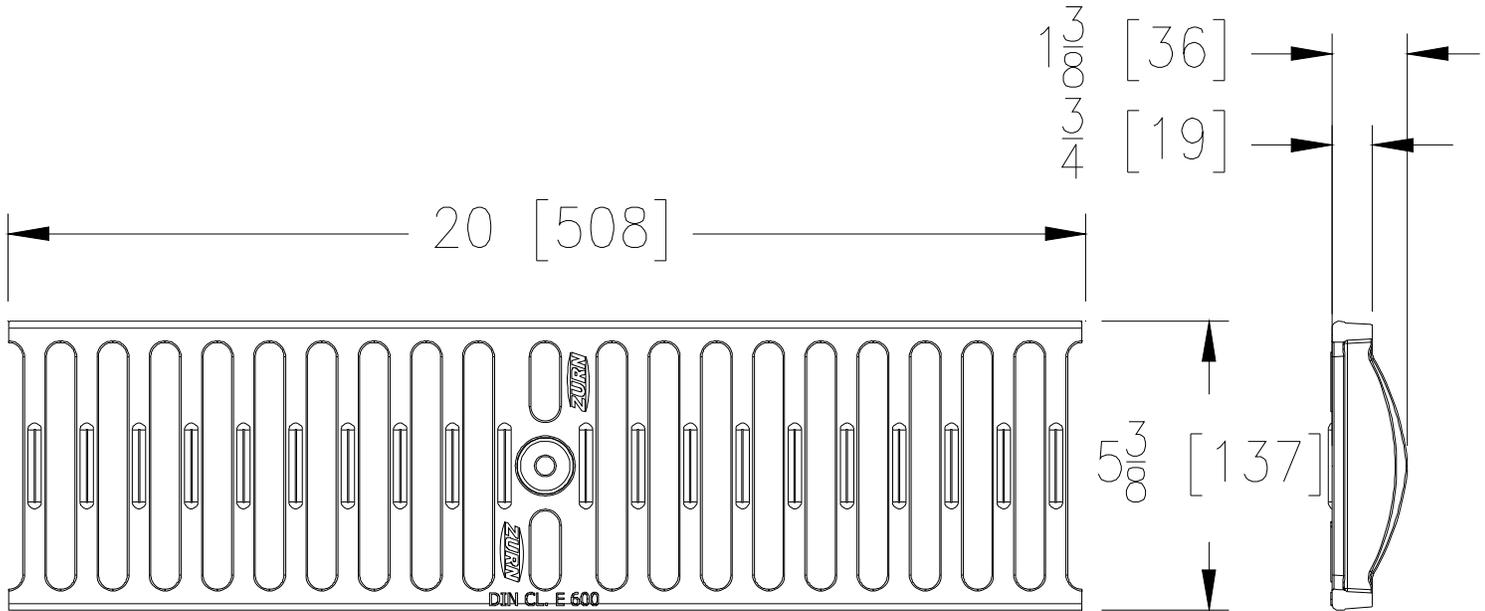

**BDE GRATE ENGINEERING SPECIFICATION: ZURN P6-BDE**

20" [508mm] X 5-3/8" [137mm] Black acid resistant epoxy coated Ductile Iron slotted grate weighing 6.4 lbs per linear foot [9.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 load rated, FAA load rated and ASTM A536 Grade 80-55-06.

<b>BDE -Black Acid Resistant Ductile</b>	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [9.5kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-BDE-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	6	94473	P6-BDE-USA

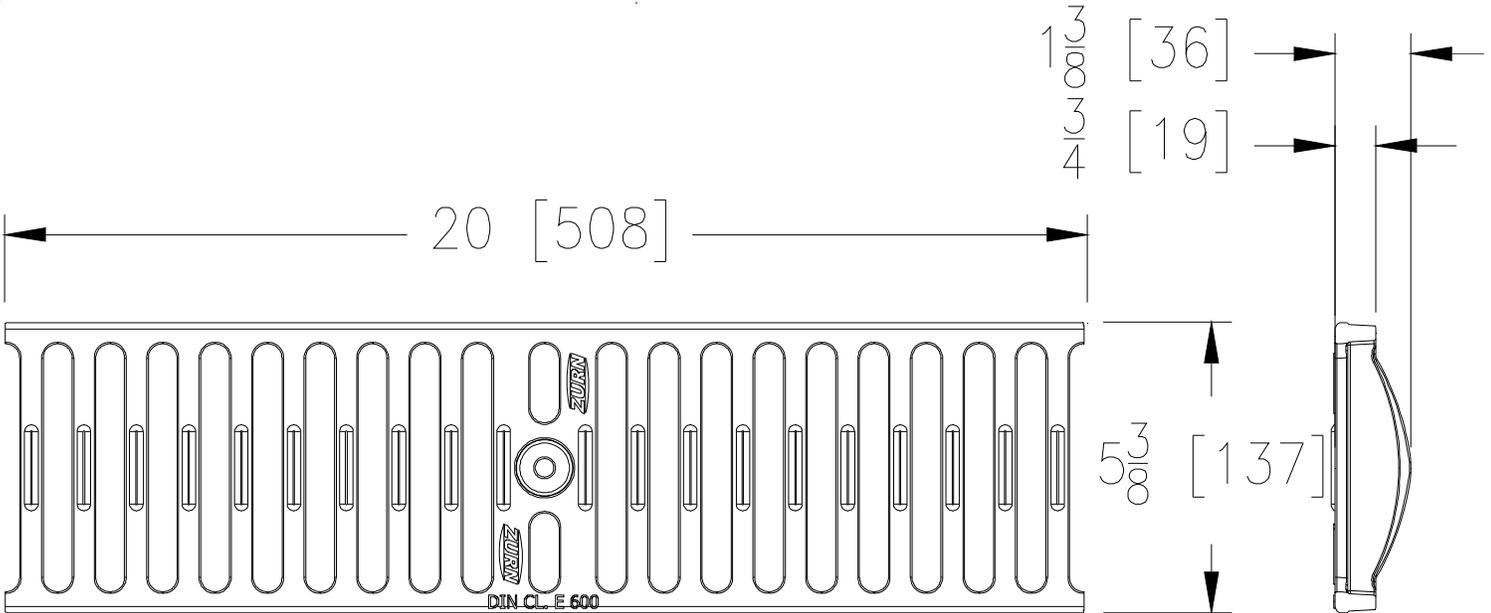

### BDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-BDE-USA

20" [508mm] X 5-3/8" [137mm] Black acid resistant epoxy coated Ductile Iron slotted grate weighing 6.4 lbs per linear foot [9.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 load rated, FAA load rated and ASTM A536 Grade 80-55-06.

BDE-USA -Black Acid Resistant	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [9.5kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes






**P6-BG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	7	61025	P6-BG

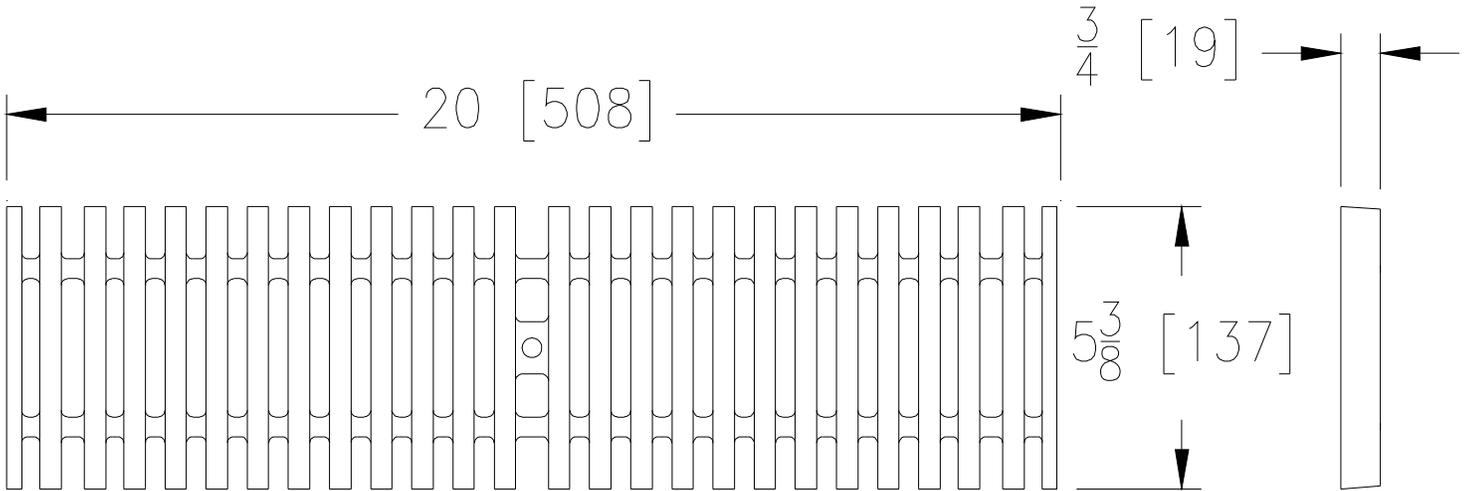

**BG GRATE ENGINEERING SPECIFICATION:** The Zurn P6-BG

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron slotted bar grate weighing 5.7 lbs per linear foot [8.5kg/m]. The grate has an open area of 23.9 in<sup>2</sup> per linear foot [505cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA compliant\*, H-20 load rated, ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>BG - Slotted Bar Grate</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	5.7 lbs/ft. [8.5kg/m]
Open Area:	23.9 in <sup>2</sup> /ft. [505cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	19/64" [7.5mm]
ADA:	Yes*
H-20:	Yes
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-BZ

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	8	64054	P6-BZ

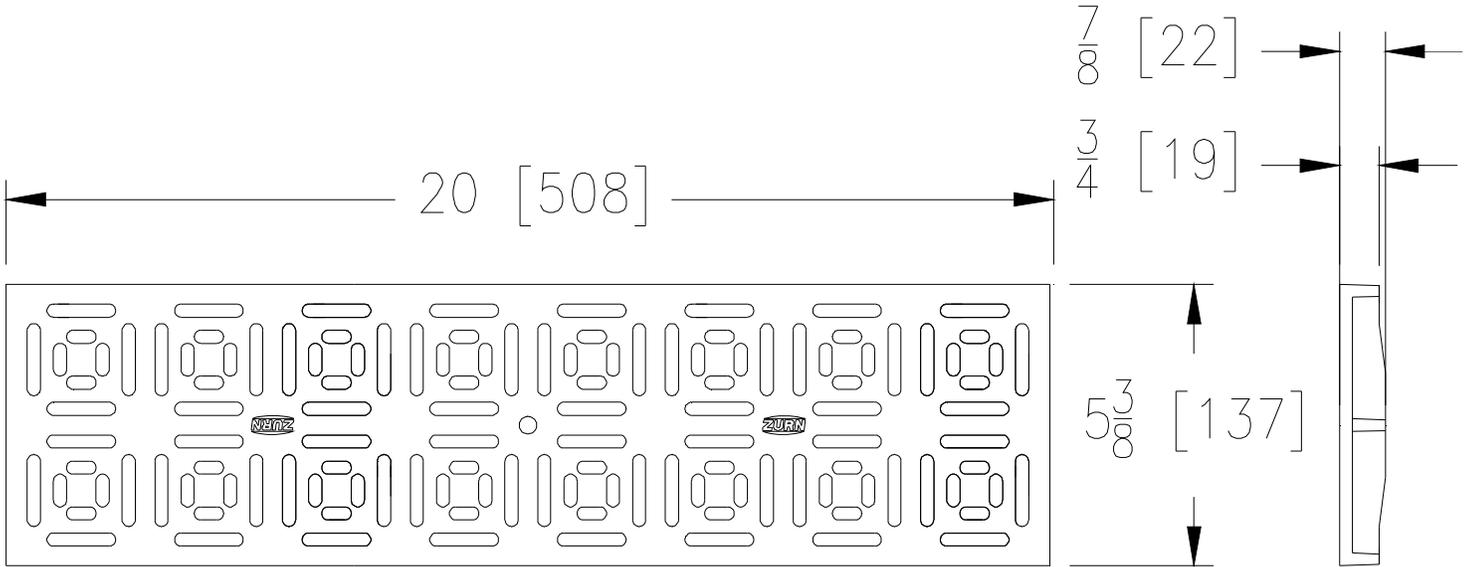

### BZ GRATE ENGINEERING SPECIFICATION: ZURN P6-BZ

20" [508mm] X 5-3/8" [137mm] Bronze decorative grate weighing 6.2 lbs per linear foot [9.2kg/m]. The grate has an open area of 16.9 in<sup>2</sup> per linear foot [357cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant, ASTM B584 Copper Alloy NO. C844.

BZ - Bronze Decorative	
Material:	Bronze
DIN Rating:	Class A
Weight:	6.2 lbs/ft. [9.2kg/m]
Open Area:	16.9 in <sup>2</sup> /ft. [357cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No






**P6-DBG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	9	61025	P6-DBG

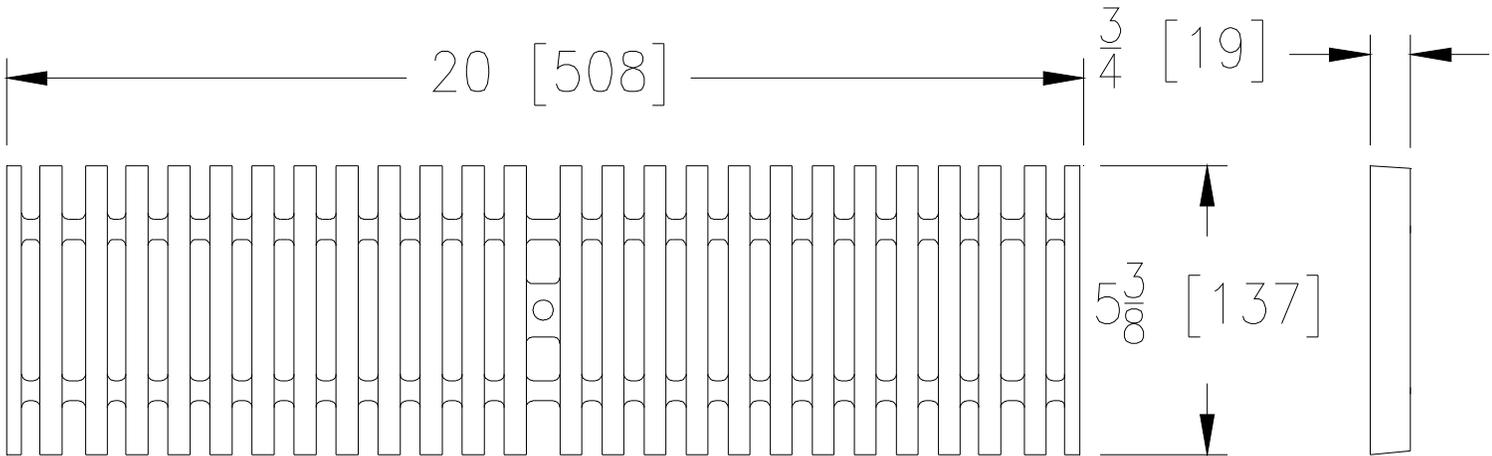

**DBG GRATE ENGINEERING SPECIFICATION: ZURN P6-DBG**

20" [508mm] X 5-3/8" [137mm] Ductile Iron slotted bar Dura-coated grate weighing 5.7 lbs per linear foot [8.5kg/m]. The grate has an open area of 23.9 in<sup>2</sup> per linear foot [505cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA compliant\*, H-20 load rated and ASTM A536 Grade 80-55-06.

DBG - Dura-Coated Bar Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	5.7 lbs/ft. [8.5kg/m]
Open Area:	23.9 in <sup>2</sup> /ft. [505cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	19/64" [7.5mm]
ADA:	Yes*
H-20:	Yes
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




**P6-DC**  
6 [152] Wide Cover

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	10	56780	P6-DC

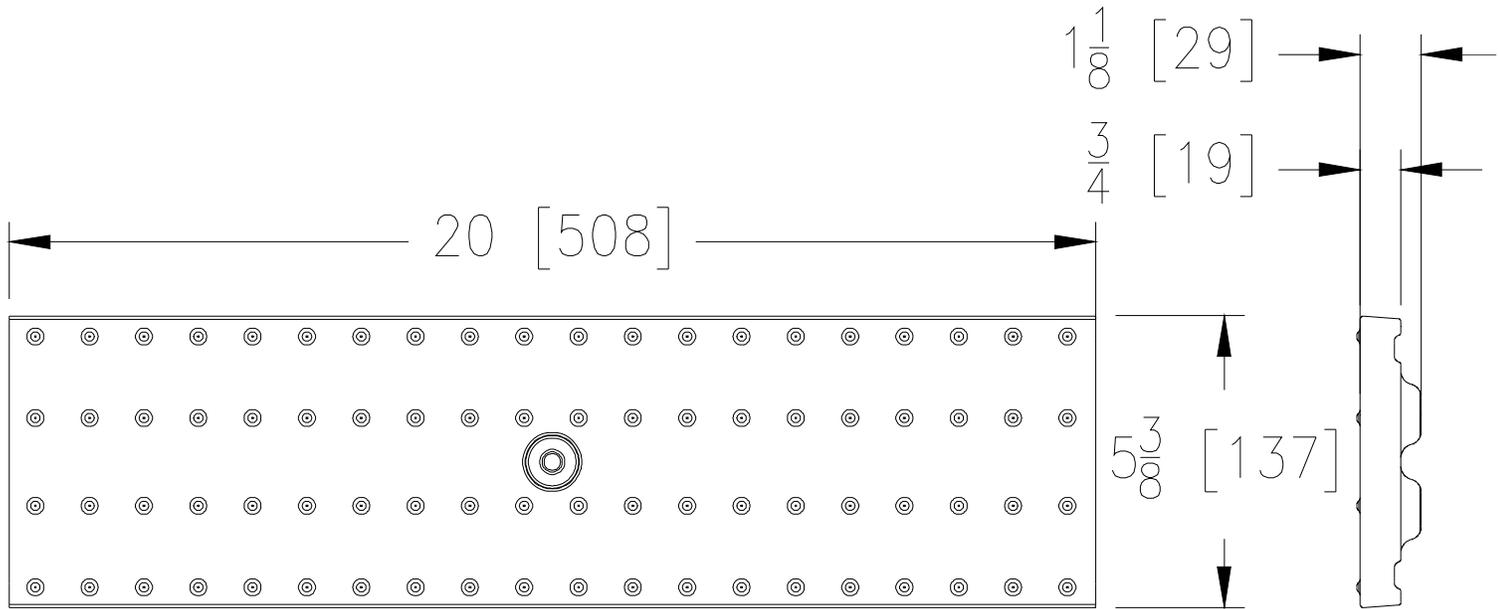

**DC GRATE ENGINEERING SPECIFICATION: ZURN P6-DC**

20" [508mm] X 5-3/8" [137mm] Ductile Iron Dura-coated solid cover weighing 8 lbs per linear foot [11.8kg/m]. Grate conforms to DIN Rating of C, ANSI rating of Heavy-Duty, H-20 Load Rated, ADA compliant, and ASTM A536 Grade 80-55-06.

DC - Solid Cover	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	8 lbs/ft. [11.8kg/m]
Open Area:	N/A
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	N/A
ADA:	Yes
H-22:	Yes
FAA:	No




# P6-DCD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	11	64255	P6-DCD

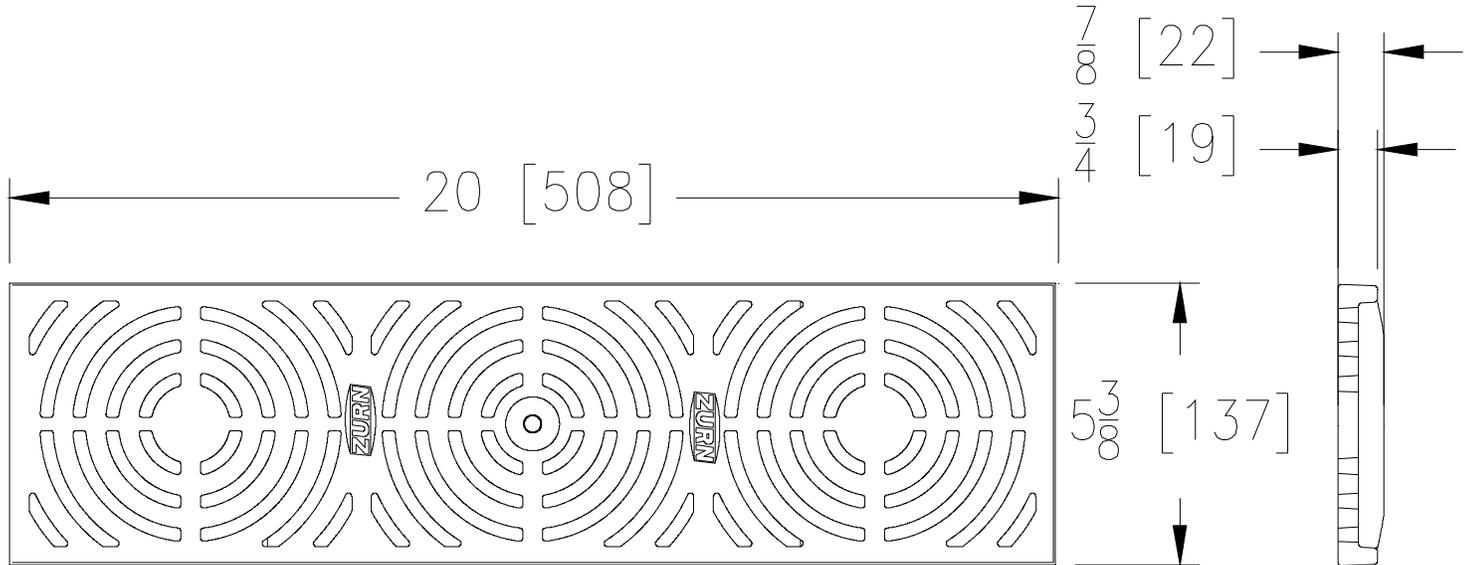

### DCD GRATE ENGINEERING SPECIFICATION: ZURN P6-DCD

20" [508mm] X 5-3/8" [137mm] Ductile Iron circular decorative grate, weighing 6.3 lbs per linear foot [9.5kg/m]. The grate has an open area of 17.6 in<sup>2</sup> per linear foot [374cm<sup>2</sup>/m], DIN rating of C, ANSI rating of Heavy-Duty and ASTM A536 Grade 80-55-06.

DCD - Circular Decorative	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	6.3 lbs/ft. [9.5kg/m]
Open Area:	17.6 in <sup>2</sup> /ft. [374cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-DCE-USA**  
**6 [152] Wide Domestic Cover**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	12	84474	P6-DCE-USA

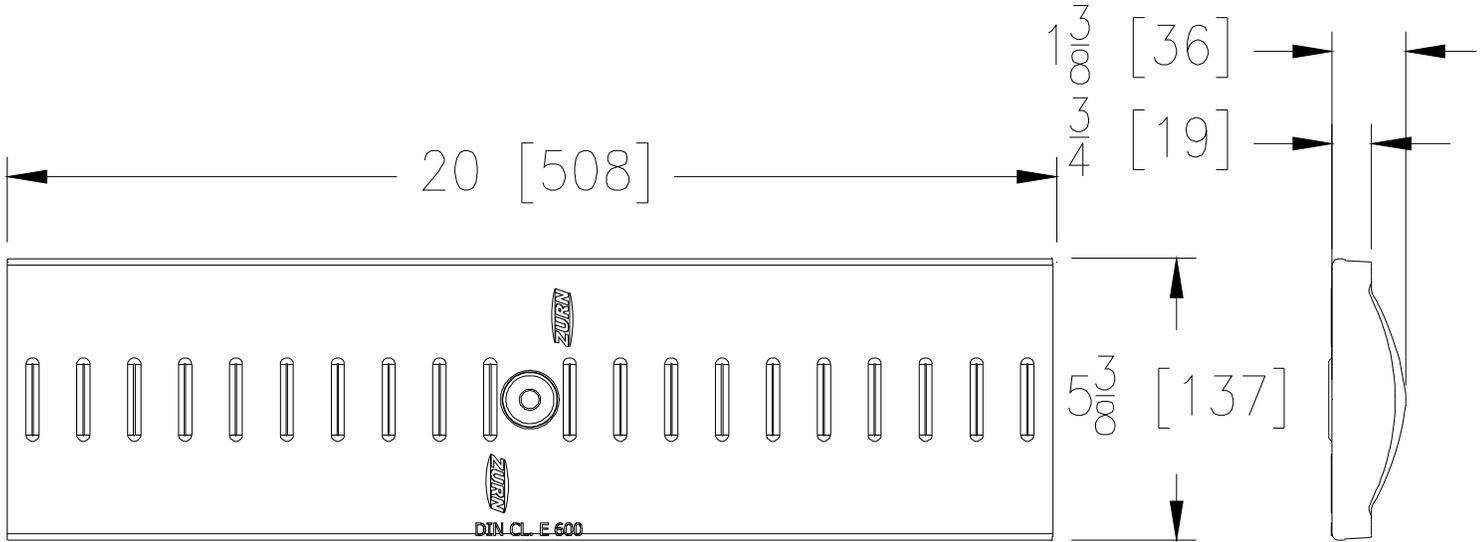

**DCE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-DCE-USA**

20" [508mm] X 5-3/8" [137mm] Ductile Iron Dura-coated solid cover, weighing 8.0 lbs per linear foot [11.8kg/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, is H-20 & FAA load rated, ADA compliant and ASTM A536 Grade 80-55-06.

<b>DCE-USA - Solid Cover</b>	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	8.0 lbs/ft. [11.8kg/m]
Open Area:	N/A
ANSI Rating:	Special Duty
Application:	Dynamic Loads
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	Yes
FAA:	Yes






**P6-DDD**  
**6 [152] Wide Decorative Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	13	67506	P6-DDD

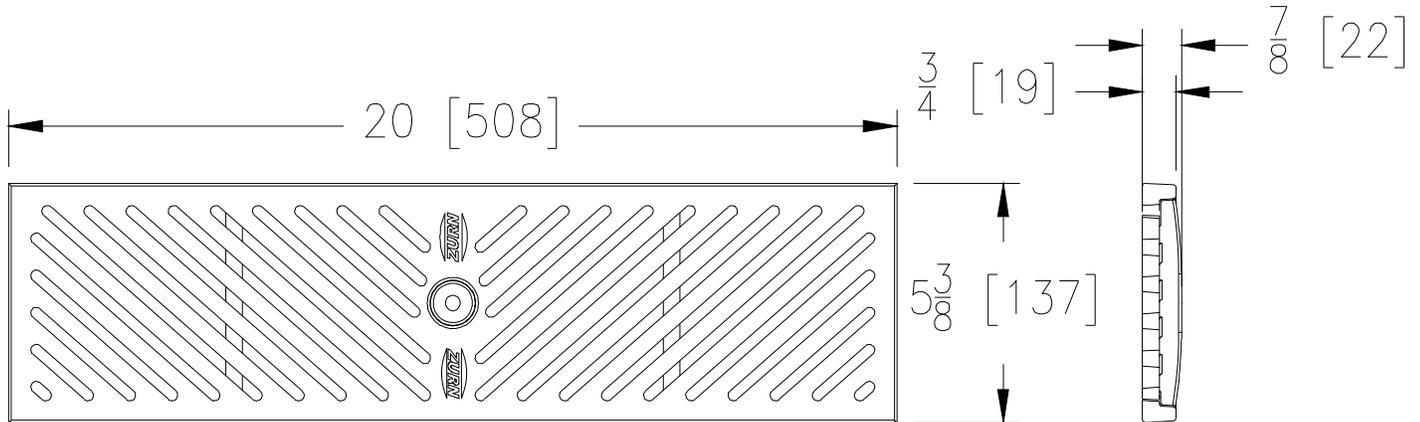

**DDD GRATE ENGINEERING SPECIFICATION: ZURN P6-DDD**

20" [508mm] X 5-3/8" [137mm] Ductile Iron diagonal decorative grate, weighing 5.5 lbs per linear foot [8.2kg/m]. The grate has an open area of 17.9 in<sup>2</sup> per linear foot [377cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM A536 Grade 80-55-06.

<b>DDD - Diagonal Decorative</b>	
Material:	Ductile Iron
DIN Rating:	Class A
Weight:	5.5 lbs/ft. [8.2kg/m]
Open Area:	17.9 in <sup>2</sup> /ft. [377cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-DGC**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	14	94472	P6-DGC

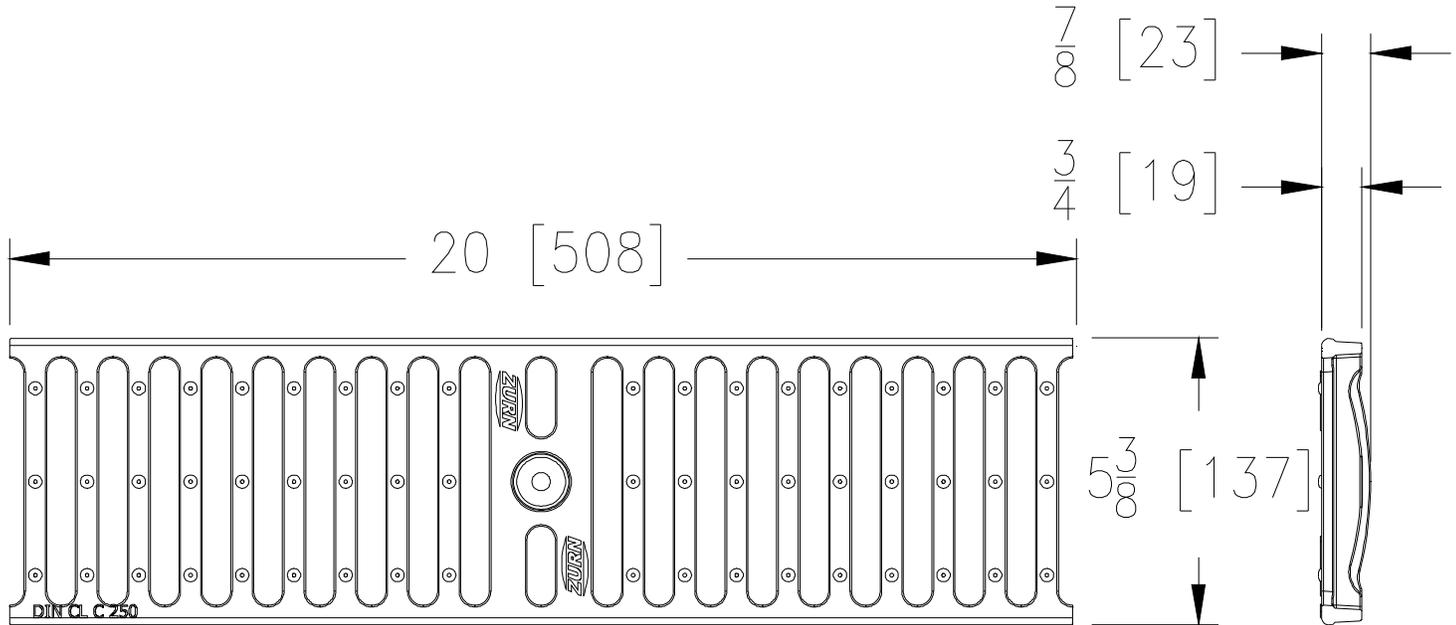

**DGC GRATE ENGINEERING SPECIFICATION: ZURN P6-DGC**

20" [508mm] X 5-3/8" [137mm] Ductile Iron slotted grate weighing 4.5 lbs per linear foot [6.6kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m], DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

<b>DGC - Slotted Grate</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [6.6kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	No




# P6-DGC-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	15	94472	P6-DGC-USA

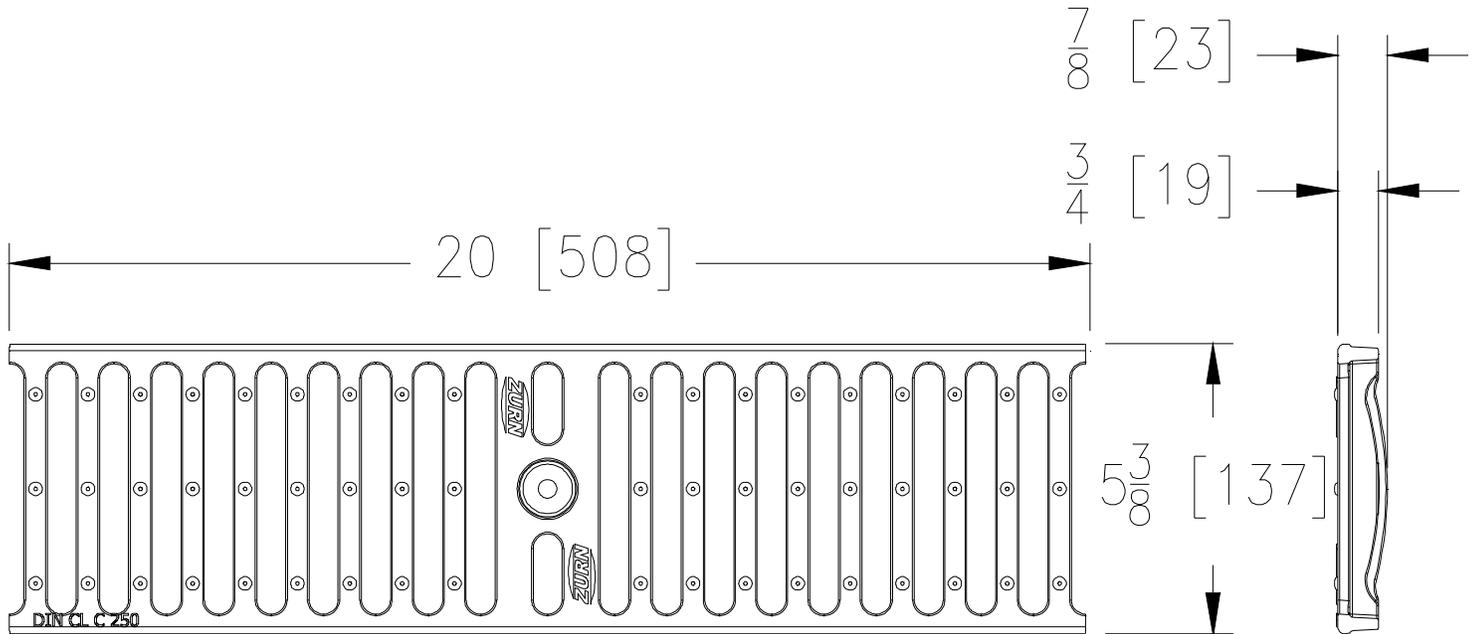

### DGC-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-DGC-USA

20" [508mm] X 5-3/8" [137mm] Ductile Iron slotted grate weighing 4.5 lbs per linear foot [6.6kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

DGC-USA - Slotted Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [6.6kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	No






**P6-DGE**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	16	94473	P6-DGE

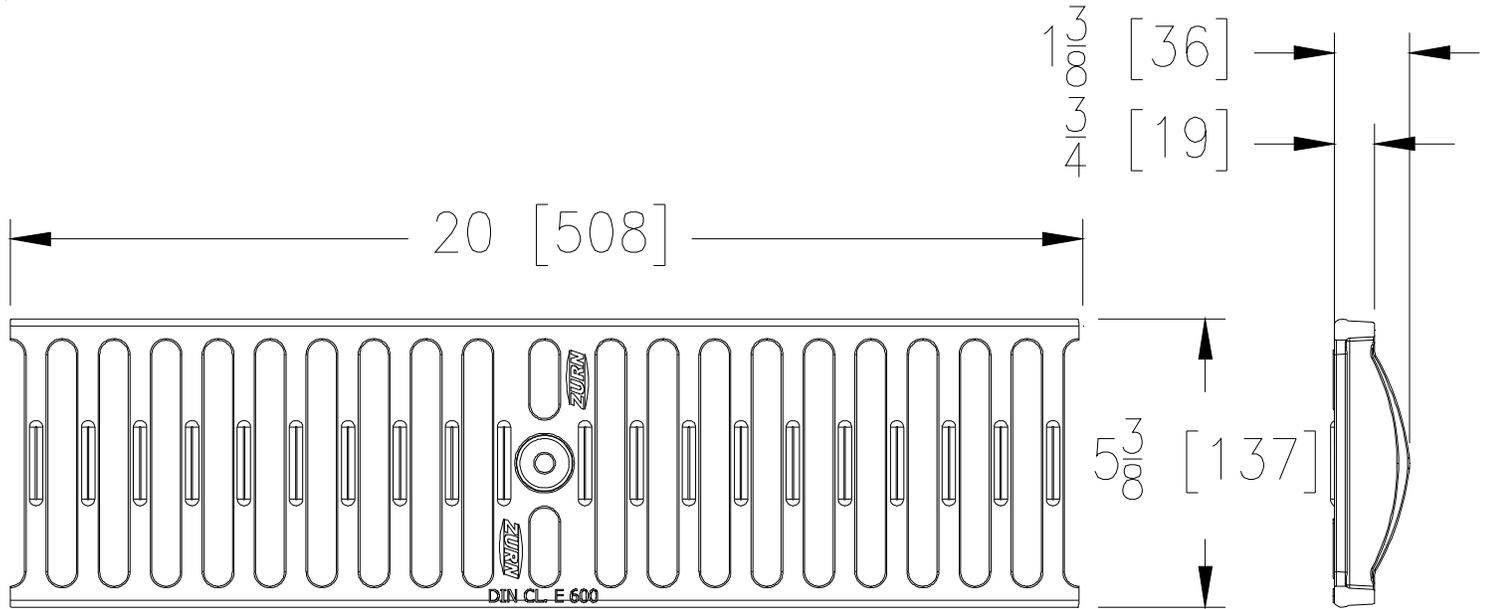

**DGE GRATE ENGINEERING SPECIFICATION:** The Zurn P6-DGE

20" [508mm] X 5-3/8" [137mm] Ductile Iron slotted grate weighing 6.4 lbs per linear foot [9.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 load rated, FAA load rated and ASTM A536 Grade 80-55-06.

<b>DGE - Slotted Grate</b>	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [9.5kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-DGE-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	17	94473	P6-DGE-USA

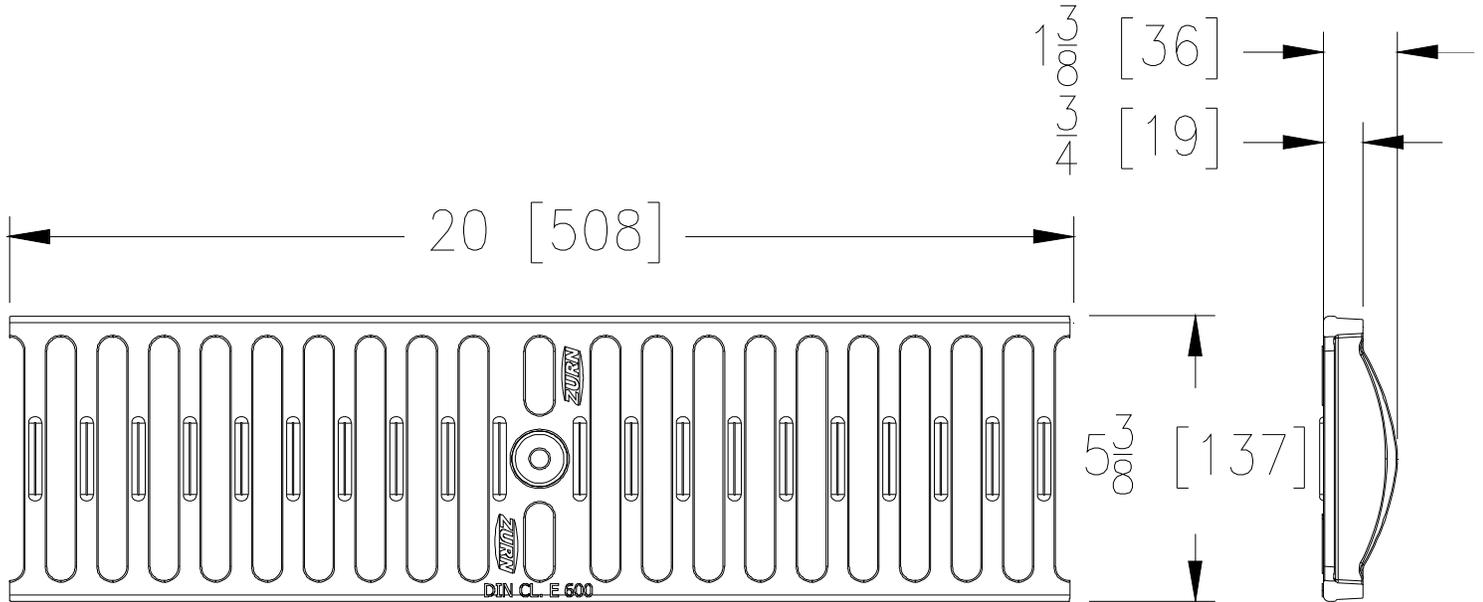

### DGE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-DGE-USA

20" [508mm] X 5-3/8" [137mm] Ductile Iron slotted grate weighing 6.4 lbs per linear foot [9.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated. Grate conforms to ASTM A536 Grade 80-55-06



DGE-USA - Slotted Grate	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [9.5kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-DOG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	18	64054	P6-DOG

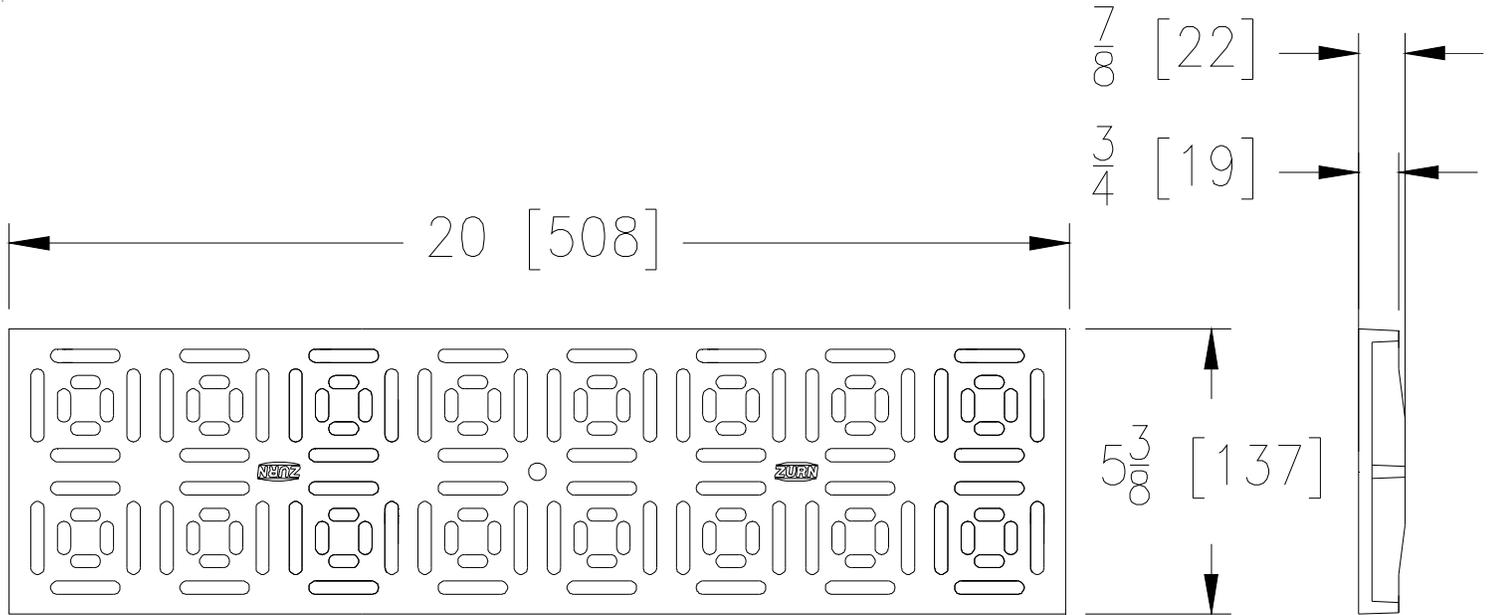

### DOG GRATE ENGINEERING SPECIFICATION: ZURN P6-DOG

20" [508mm] X 5-3/8" [137mm] Ductile Iron ornamental grate weighing 4.9 lbs per linear foot [7.2kg/m]. The grate has an open area of 16.9 in<sup>2</sup> per linear foot [357cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant and ASTM A536 Grade 80-55-06.

DOG - Ornamental Grate	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	4.9 lbs/ft. [7.2kg/m]
Open Area:	16.9 in <sup>2</sup> /ft. [357cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-DTW

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	19	94069	P6-DTW

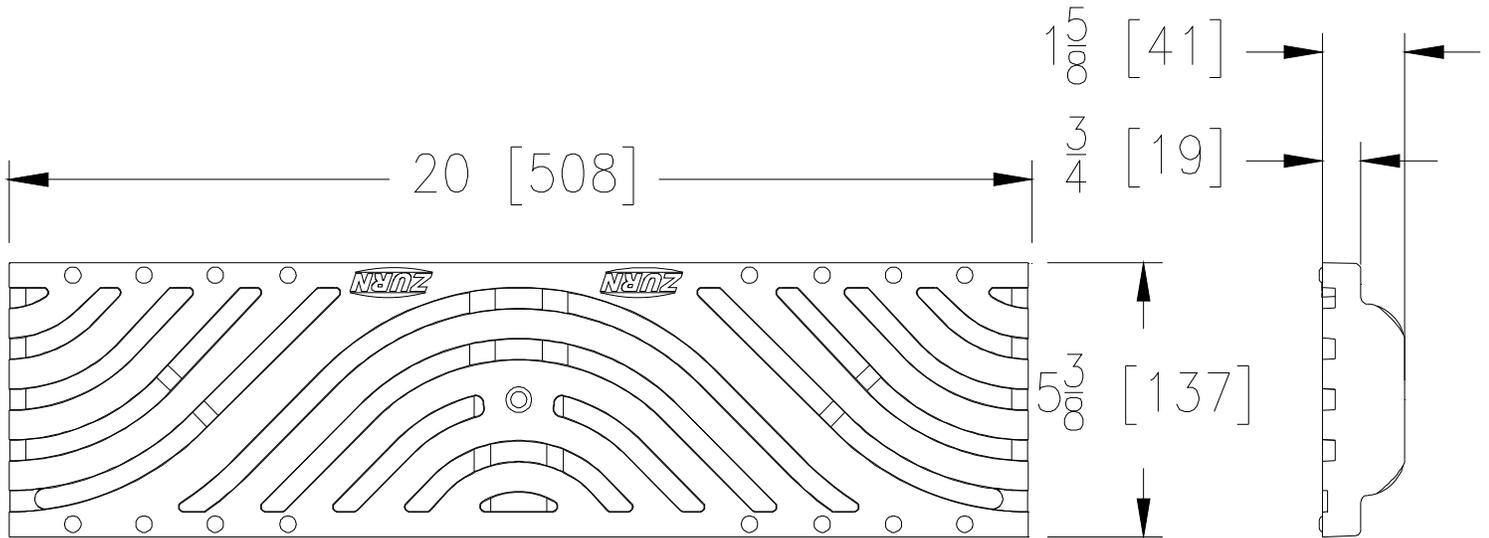

### DTW GRATE ENGINEERING SPECIFICATION: ZURN P6-DTW

20" [508mm] X 5-3/8" [137mm] Ductile Iron decorative tidal wave grate weighing 8.1 lbs per linear foot [12.1kg/m]. The grate has an open area of 21.0 in<sup>2</sup> per linear foot [443cm<sup>2</sup>/m]. Grate conforms to DIN Rating of C, ANSI Rating of Heavy-Duty, ADA compliant, H2O load rated and ASTM A536 Grade 80-55-06.

DTW - Decorative Tidal Wave	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	8.1 lbs/ft. [12.1kg/m]
Open Area:	21.0 in <sup>2</sup> /ft. [443cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Decorative
Slot Width/Hole Size:	13/32" [10mm]
ADA:	Yes
H-20:	Yes
FAA:	No




**P6-DWV**  
**6 [152] Wide Decorative Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	20	64450	P6-DWV

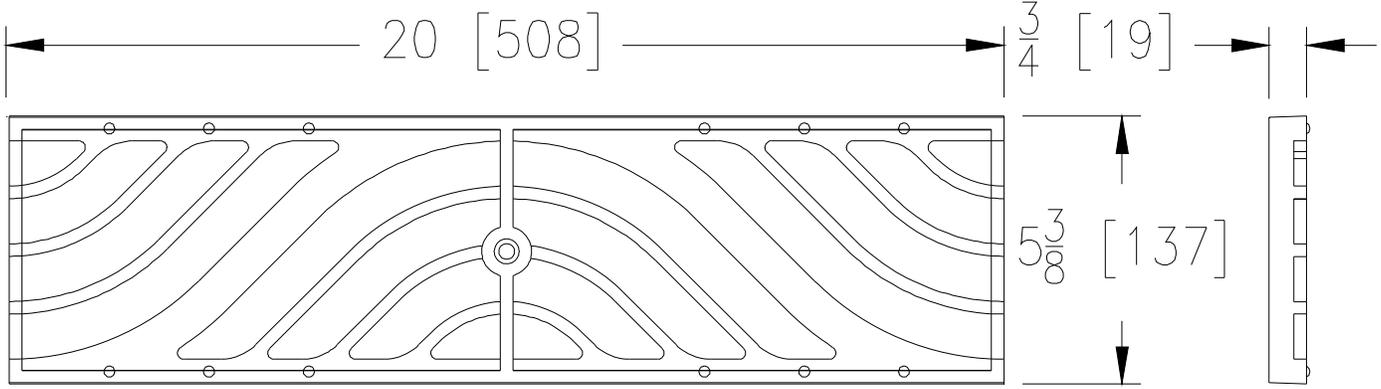

**DWV GRATE ENGINEERING SPECIFICATION: ZURN P6-DWV**

20" [508mm] X 5-3/8" [137mm] Ductile Iron decorative wave grate weighing 4.2 lbs per linear foot [6.2kg/m]. The grate has an open area of 36.9 in<sup>2</sup> per linear foot [780cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ASTM A536 Grade 80-55-06.

<b>DWV - Decorative Wave</b>	
Material:	Ductile Iron
DIN Rating:	Class A
Weight:	4.2 lbs/ft. [6.2kg/m]
Open Area:	36.9 in <sup>2</sup> /ft. [780cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Decorative
Slot Width/Hole Size:	29/32" [23mm]
ADA:	No
H-20:	No
FAA:	No




**P6-FG**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	21	64063	P6-FG

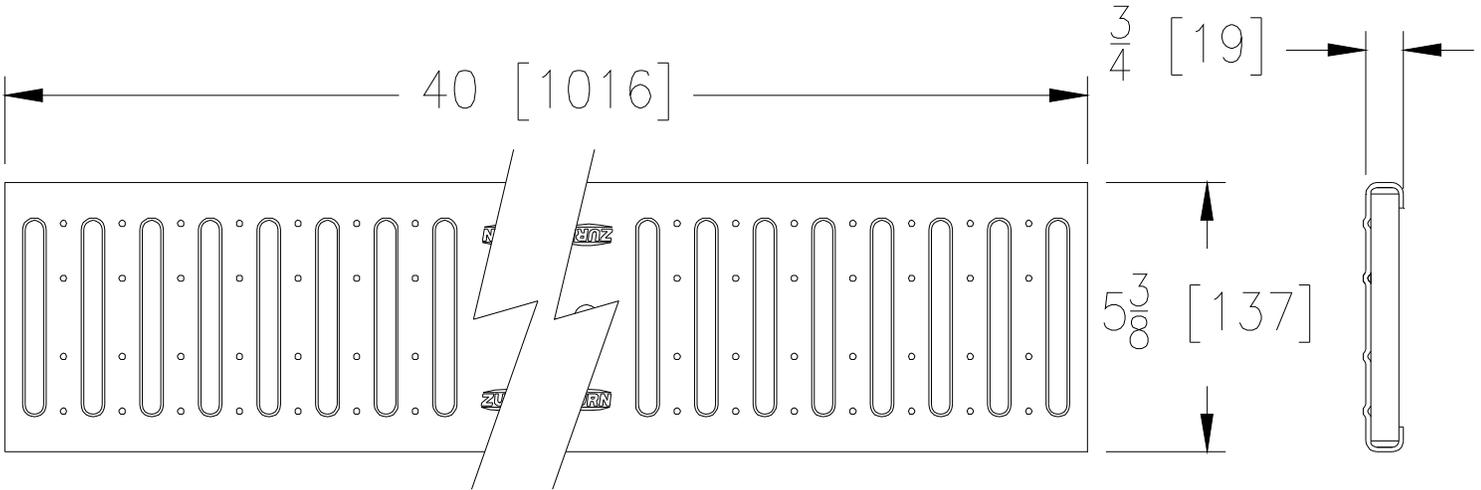

**FG GRATE ENGINEERING SPECIFICATION: ZURN P6-FG**

40" [1016mm] X 5-3/8" [137mm] Galvanized steel fabricated slotted grate weighing 1.7 lbs per linear foot [2.6kg/m]. The grate has an open area of 12.0 in<sup>2</sup> per linear foot [253cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, and ADA compliant\*. Galvanized skin conforms to ASTM A1011 or ASME A1008, Galvanizing conforms to ASTM A653, Galvanized Coating designation G60, and minimum spangle.



<b>FG - Fabricated Slotted</b>	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.7 lbs/ft. [2.6kg/m]
Open Area:	12.0 in <sup>2</sup> /ft. [253cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Pedestrian Traffic
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-FS

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	22	64063	P6-FS

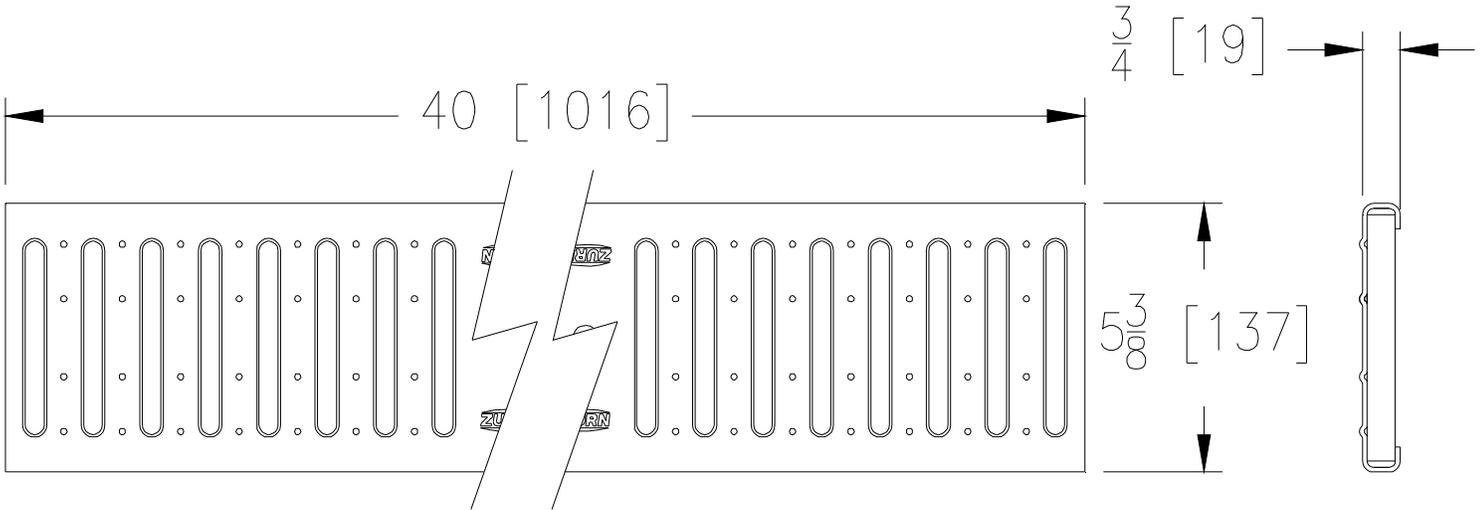

### FS GRATE ENGINEERING SPECIFICATION: ZURN P6-FS

40" [1016mm] X 5-3/8" [137mm] Stainless steel fabricated slotted grate weighing 1.7 lbs per linear foot [2.6kg/m]. The grate has an open area of 12.0 in<sup>2</sup> per linear foot [253cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant\* and ASTM A-240 TYPE 304 (316 by request).



FS - Slotted	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.7 lbs/ft. [2.6kg/m]
Open Area:	12.0 in <sup>2</sup> /ft. [253cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Pedestrian Traffic
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




**P6-GDC**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	23	94472	P6-GDC

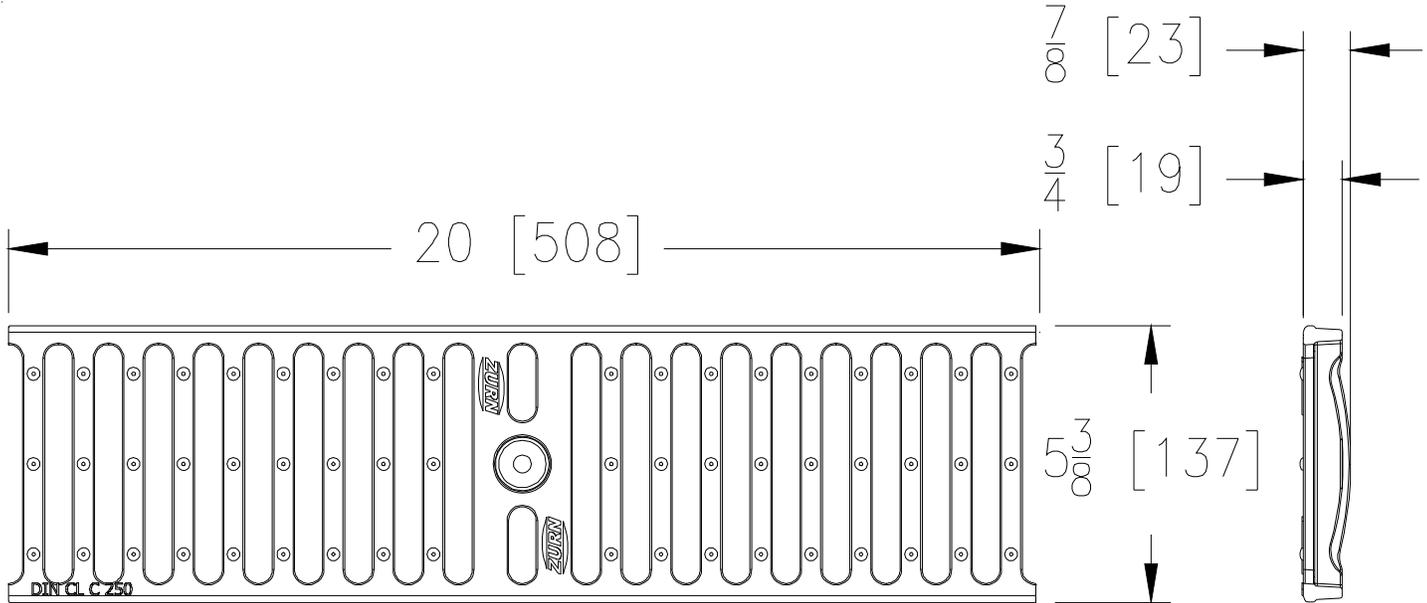

**GDC GRATE ENGINEERING SPECIFICATION: ZURN P6-GDC**

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron slotted grate weighing 4.5 lbs per linear foot [6.6kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rating, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

GDC - Slotted Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [6.6kg/m]
Open Area:	28.1 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	No




# P6-GDC-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	24	94472	P6-GDC-USA

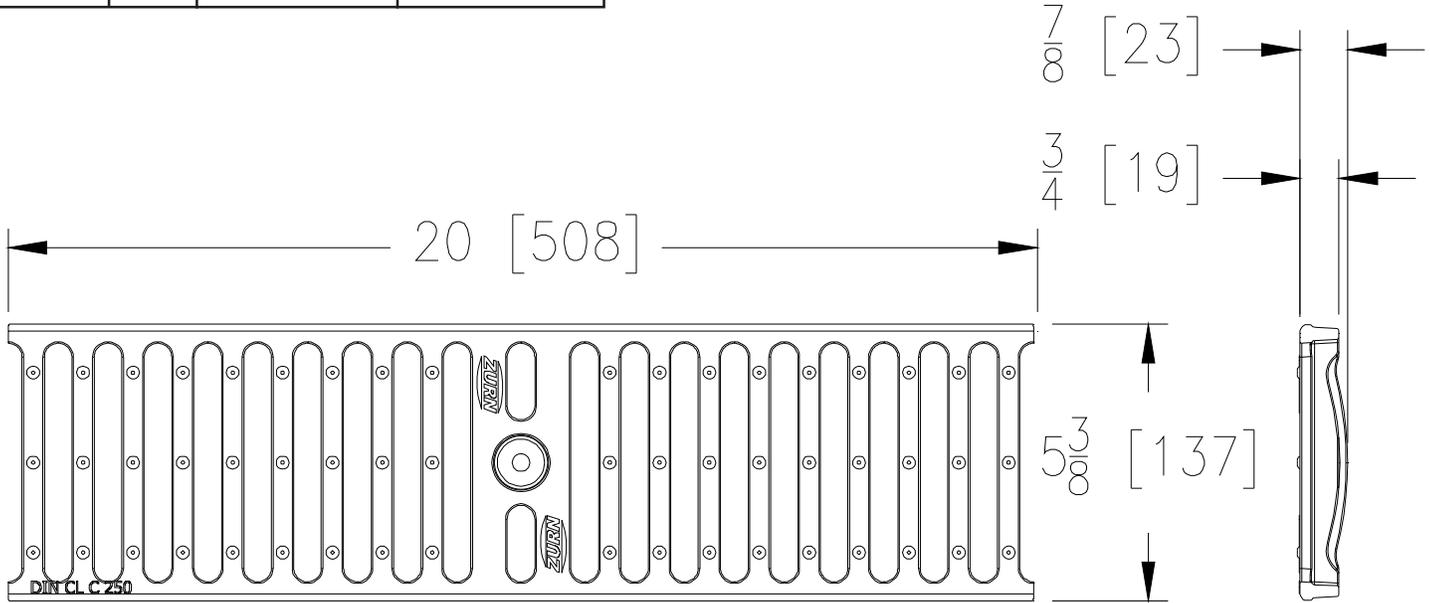

### GDC-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-GDC-USA

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron slotted grate weighing 4.5 lbs per linear foot [6.6kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [594cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

GDC-USA - Slotted Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [6.6kg/m]
Open Area:	28.1 in <sup>2</sup> /ft. [594cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	No






**P6-GDE**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	25	94473	P6-GDE

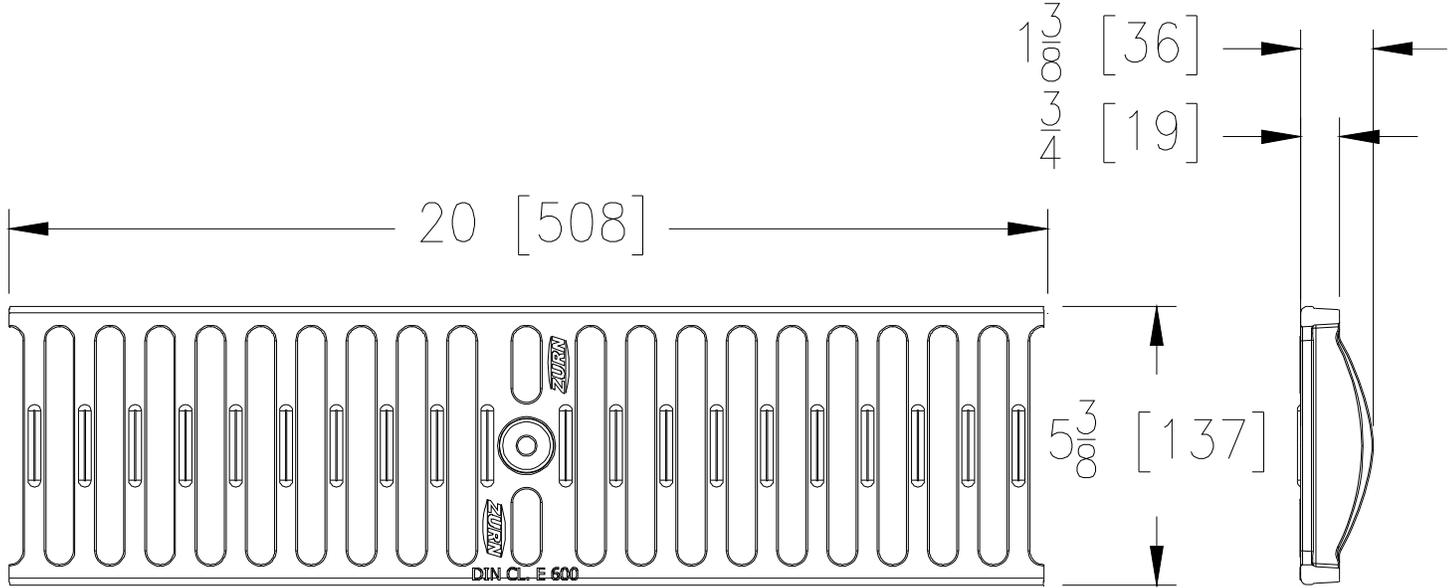

**GDE GRATE ENGINEERING SPECIFICATION: ZURN P6-GDE**

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron slotted grate weighing 6.4 lbs per linear foot [9.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [597cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTMA123.

<b>GDE - Slotted Grate</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [9.5kg/m]
Open Area:	28.2 in <sup>2</sup> /ft. [597cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-GDE-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	26	94473	P6-GDE-USA

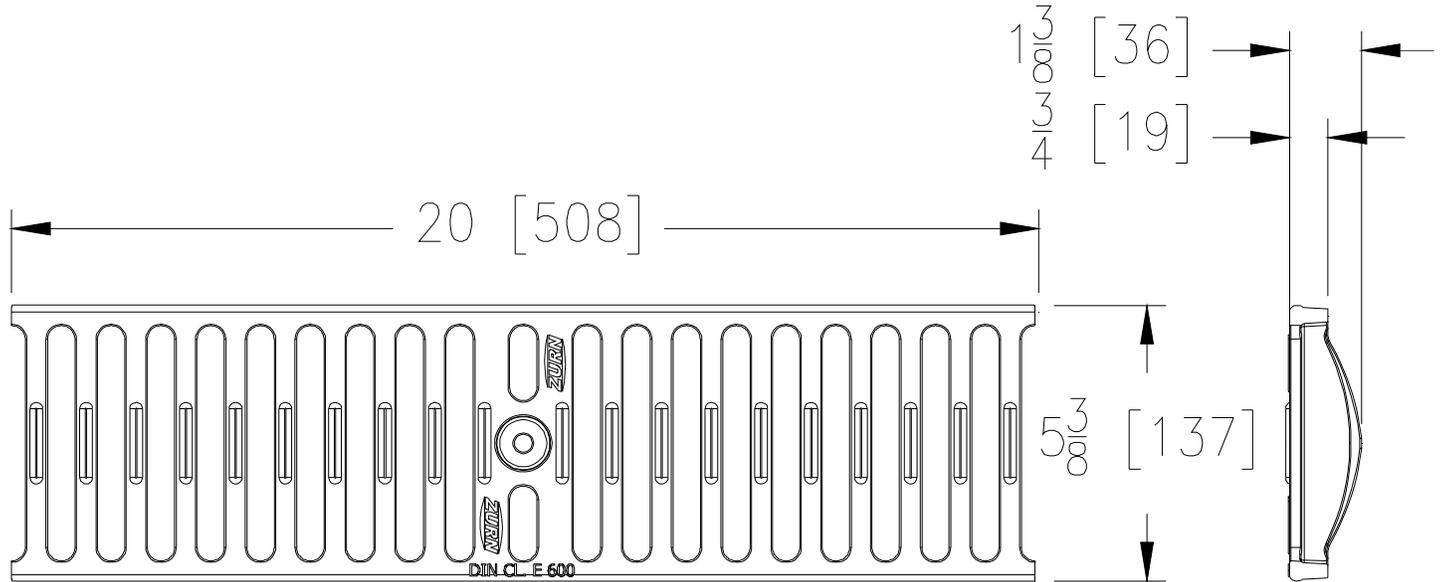

### GDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-GDE-USA

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron slotted grate weighing 6.4 lbs per linear foot [9.5kg/m]. The grate has an open area of 28.2 in<sup>2</sup> per linear foot [597cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.



GDE-USA - Slotted Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [9.5kg/m]
Open Area:	28.2/ in <sup>2</sup> /ft. [597cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes




**P6-GG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	27	56995	P6-GG

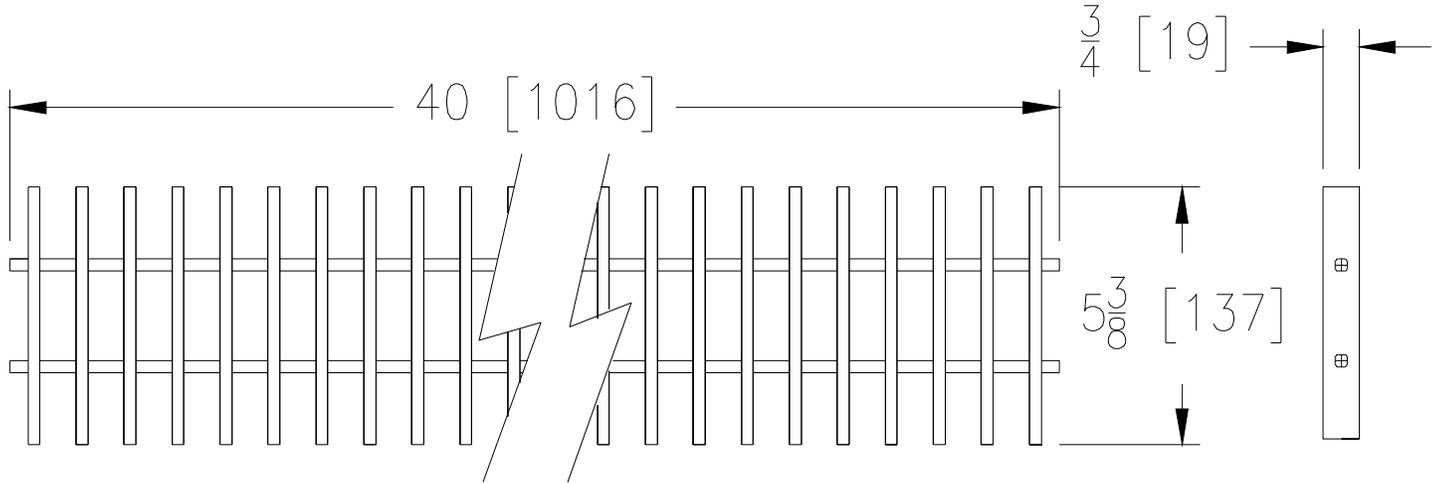

**GG GRATE ENGINEERING SPECIFICATION: ZURN P6-GG**

40" [1016mm] X 5-3/8" [137mm] Vinylester fiberglass slotted grate weighing .98 lbs per linear foot [1.4kg/m]. The grate has an open area of 41.6 in<sup>2</sup> per linear foot [879cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, slip resistant surface and interplastic CORVE8300, or Reichhold DION or equivalent.

<b>GG - Vinylester Fiberglass Slotted Grate</b>	
Material:	Vinylester Fiberglass
DIN Rating:	Class A
Weight:	.98 lbs/ft. [1.4kg/m]
Open Area:	41.6 in <sup>2</sup> /ft. [879cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Chemical App. Pedestrian
Slot Width/Hole Size:	3/4" [19mm]
ADA:	No
H-20:	No
FAA:	No




**P6-GHPD**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	28	58524	P6-GHPD

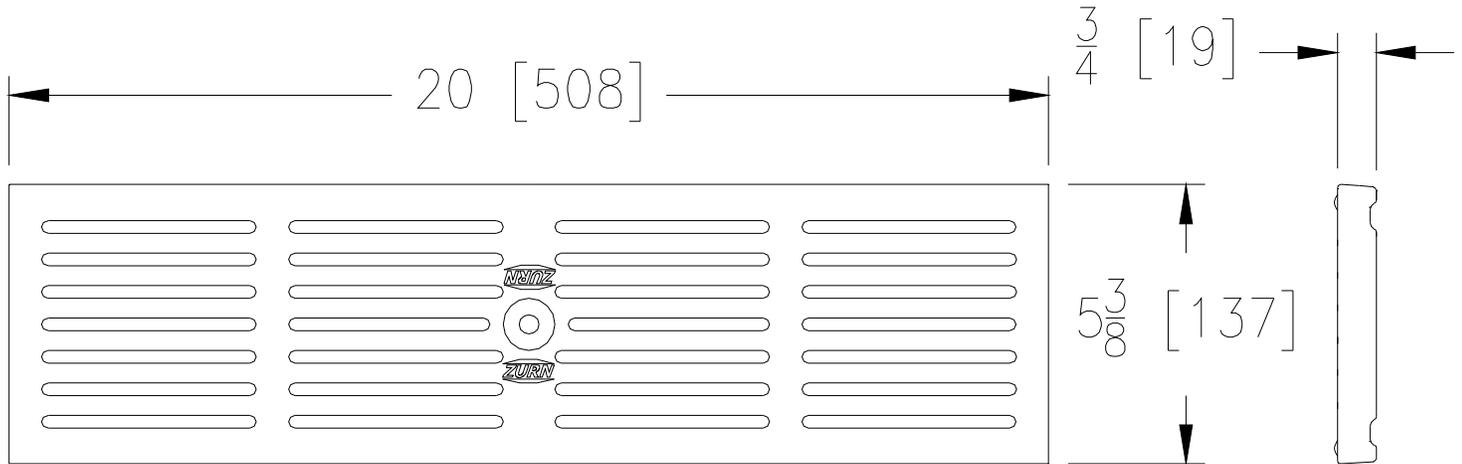

**GHPD GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPD**

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron heel-proof slotted grate weighing 6.3 lbs per linear foot [9.5kg/m]. The grate has an open area of 17.0 in<sup>2</sup> per linear foot [361cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant\* and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>GHPD - Heel-Proof Slotted</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class B
Weight:	6.3 lbs/ft. [9.5kg/m]
Open Area:	17.0 in <sup>2</sup> /ft. [361cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




**P6-GHPDE**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	29	94454	P6-GHPDE

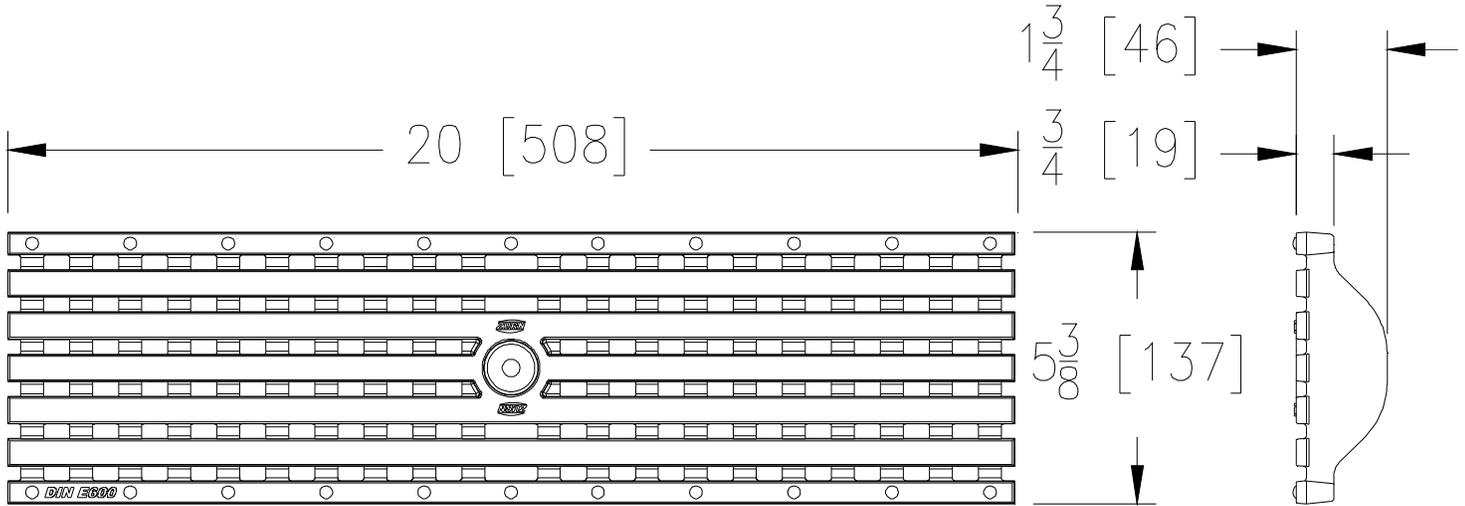

**GHPDE GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPDE**

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron heel-proof slotted grate weighing 9.5 lbs per linear foot [14.1kg/m]. The grate has an open area of 10.9 in<sup>2</sup> per linear foot [235cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>GHPDE - Heel-Proof Slotted</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	9.5 lbs/ft. [14.1kg/m]
Open Area:	10.9 in <sup>2</sup> /ft. [235cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-GHPDE-USA

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	30	94454	P6-GHPDE-USA

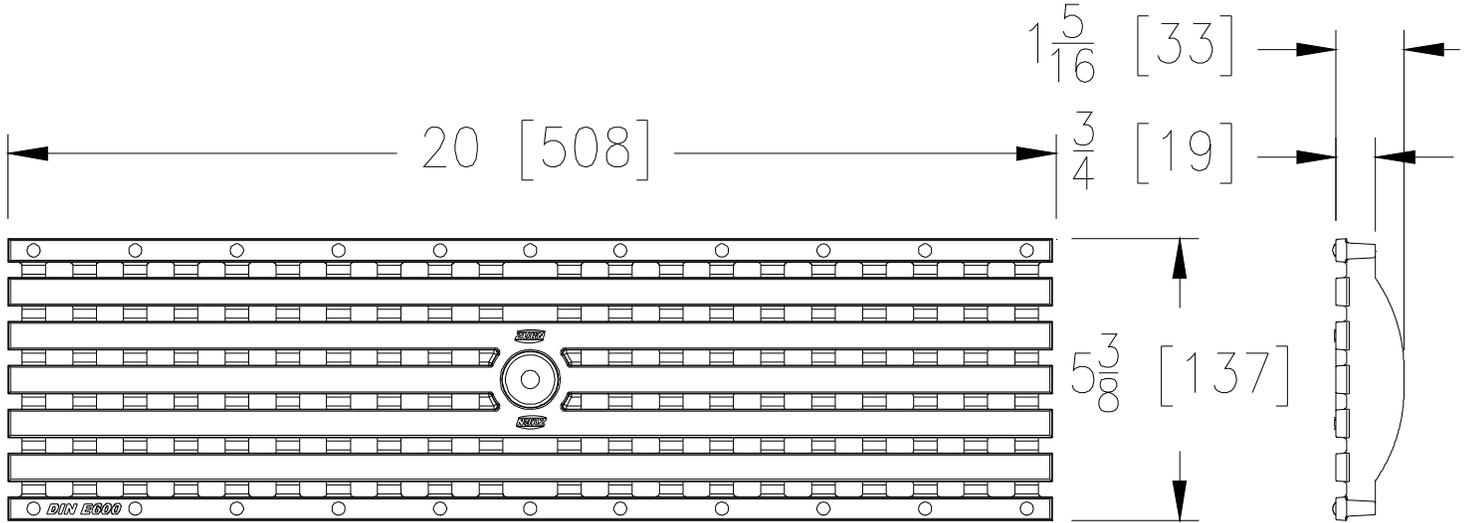

### GHPDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPDE-USA

20" [508mm] X 5-3/8" [137mm] Galvanized ductile Iron heel-proof slotted grate weighing 9.5 lbs per linear foot [14.1kg/m]. The grate has an open area of 10.9in<sup>2</sup> per linear foot [235cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.



GHPDE-USA - Heel-Proof Slotted	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	9.5lbs/ft. [14.1kg/m]
Open Area:	10.9in <sup>2</sup> /ft. [235cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-GMG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	31	64249	P6-GMG

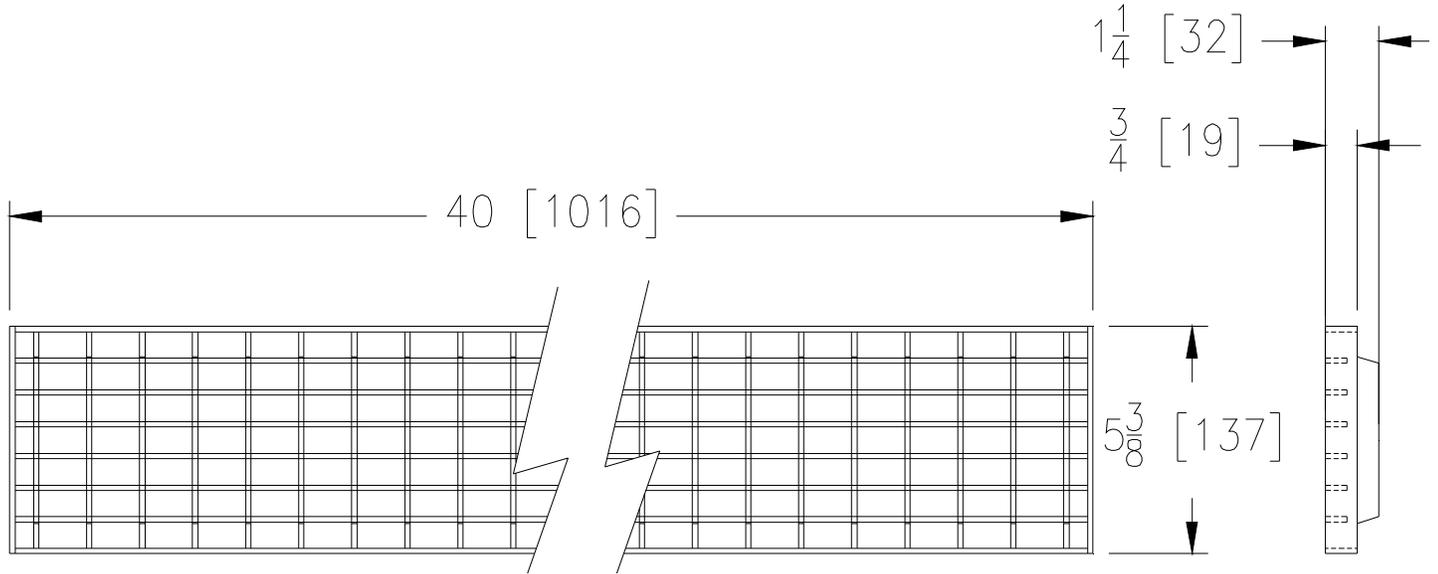

### GMG GRATE ENGINEERING SPECIFICATION: ZURN P6-GMG

40" [1016mm] X 5-3/8" [137mm] Galvanized mesh screen grate weighing 3.8 lbs per linear foot [5.6kg/m]. The grate has an open area of 47.0 in<sup>2</sup> per linear foot [994cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty and ASTM A27 Grade 70-36. Galvanizing conforms to ASTM specification A525-87.

GMG - Mesh Screen	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	3.8 lbs/ft. [5.6kg/m]
Open Area:	47.0 in <sup>2</sup> /ft. [994cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light Traffic
Slot Width/Hole Size:	1-1/8" [28.6mm]
ADA:	No
H-20:	No
FAA:	No




# P6-HPB

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	32	58524	P6-HPB

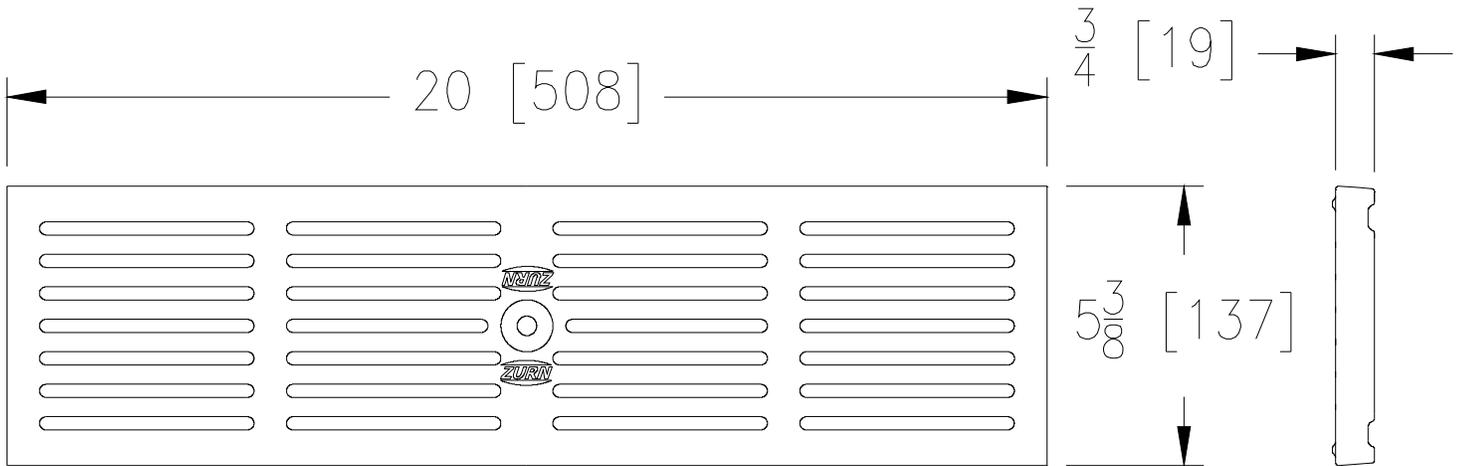

### HPB GRATE ENGINEERING SPECIFICATION: ZURN P6-HPB

20" [508mm] X 5-3/8" [137mm] Bronze heel-proof slotted grate weighing 7.8 lbs per linear foot [11.5kg/m]. The grate has an open area of 17.0 in<sup>2</sup> per linear foot [361cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant\* and ASTM B584 copper alloy No. C844.

HPB - Heel-Proof Slotted	
Material:	Bronze
DIN Rating:	Class A
Weight:	7.8 lbs/ft. [11.5kg/m]
Open Area:	17.0 in <sup>2</sup> /ft. [361cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




**P6-HPD**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	33	58524	P6-HPD

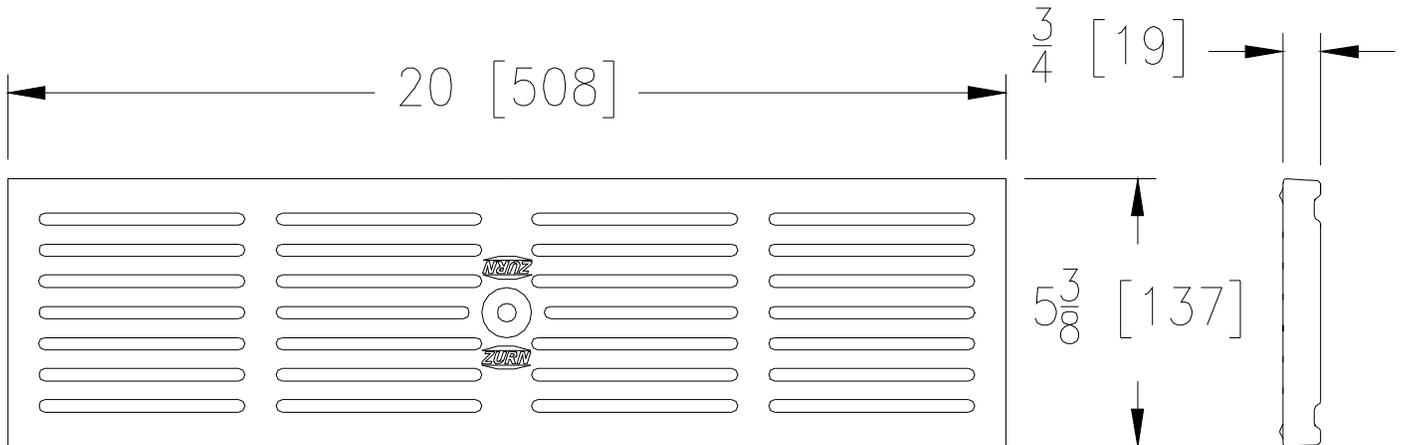

**HPD GRATE ENGINEERING SPECIFICATION: ZURN P6-HPD**

20" [508mm] X 5-3/8" [137mm] Ductile Iron heel-proof slotted grate weighing 6.3 lbs per linear foot [9.5kg/m]. The grate has an open area of 17.0 in<sup>2</sup> per linear foot [361cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant\* and ASTM A536 Grade 80-55-06.

<b>HPD - Heel-Proof Slotted</b>	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	6.3 lbs/ft. [9.5kg/m]
Open Area:	17.0 in <sup>2</sup> /ft. [361cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-HPDE

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	34	94454	P6-HPDE

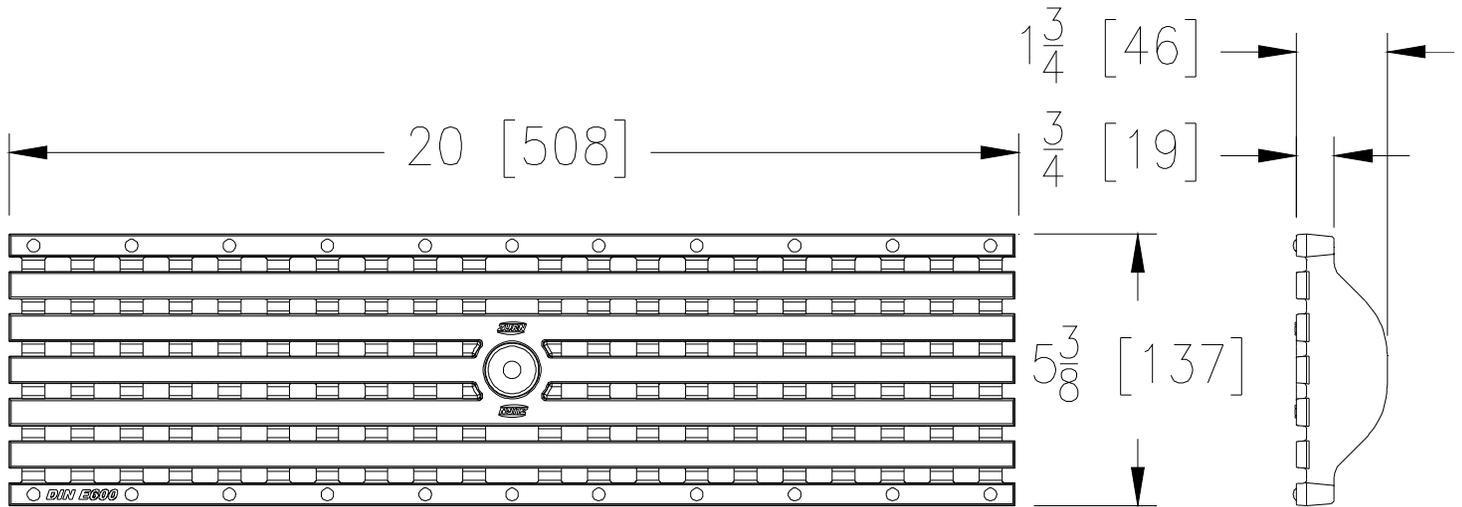

### HPDE GRATE ENGINEERING SPECIFICATION: ZURN P6-HPDE

20" [508mm] X 5-3/8" [137mm] Ductile Iron heel-proof slotted grate weighing 9.5 lbs per linear foot [14.1kg/m]. The grate has an open area of 10.9 in<sup>2</sup> per linear foot [235cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.

HPDE - Heel-Proof Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	9.5 lbs/ft. [14.1kg/m]
Open Area:	10.9 in <sup>2</sup> /ft. [235cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-HPDE-USA

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	35	94454	P6-HPDE-USA

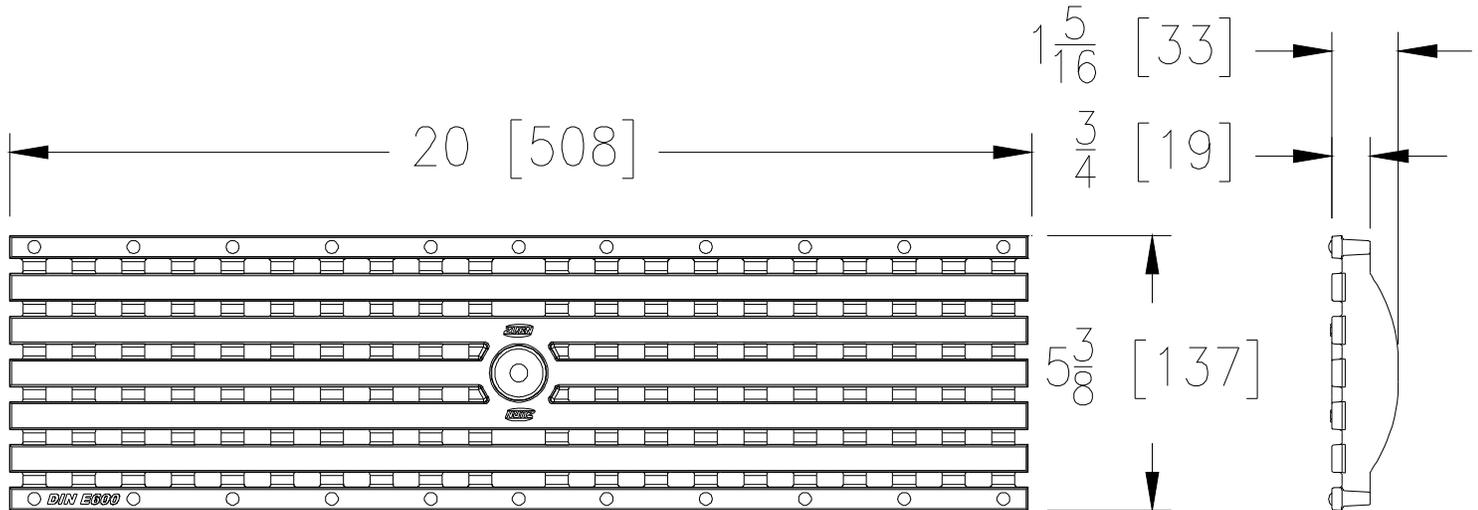

### HPDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-HPDE-USA

20" [508mm] X 5-3/8" [137mm] Ductile Iron heel-proof slotted grate weighing 9.5 lbs per linear foot [14.1kg/m]. The grate has an open area of 10.9 in<sup>2</sup> per linear foot [235cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.



HPDE-USA - Heel-Proof Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	9.5 lbs/ft. [14.1kg/m]
Open Area:	10.9 in <sup>2</sup> /ft. [235cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-HPP

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	36	94001	P6-HPP

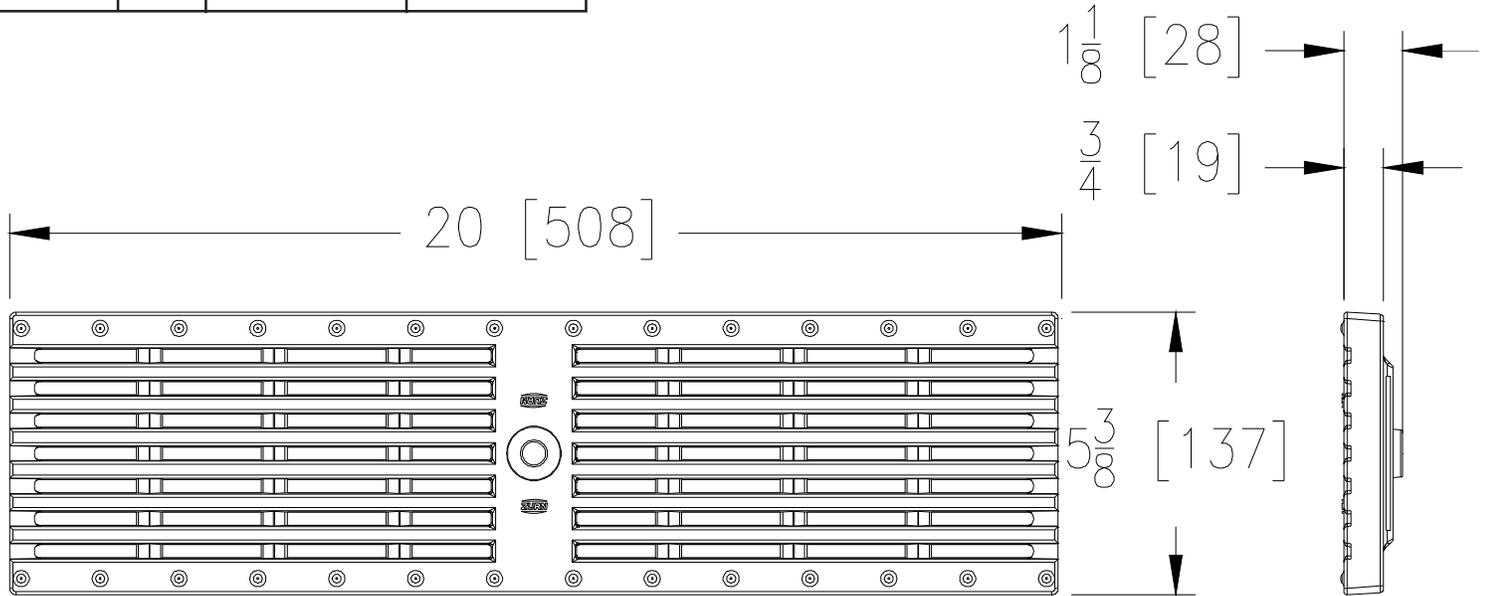

### HPP GRATE ENGINEERING SPECIFICATION: ZURN P6-HPP

20" [508mm] X 5-3/8" [137mm] High Density Polyethylene (HDPE) heel-proof slotted grate weighing .9 lbs per linear foot [1.3kg/m]. The grate has an open area of 17.4 in<sup>2</sup> per linear foot [367cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant\*, and Densetec 100 HDPE or Approved Equivalent.

HPP - Heel-Proof Slotted	
Material:	HDPE
DIN Rating:	Class A
Weight:	.9 lbs/ft. [1.3kg/m]
Open Area:	17.4 in <sup>2</sup> /ft. [367cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-HPS

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	37	58524	P6-HPS

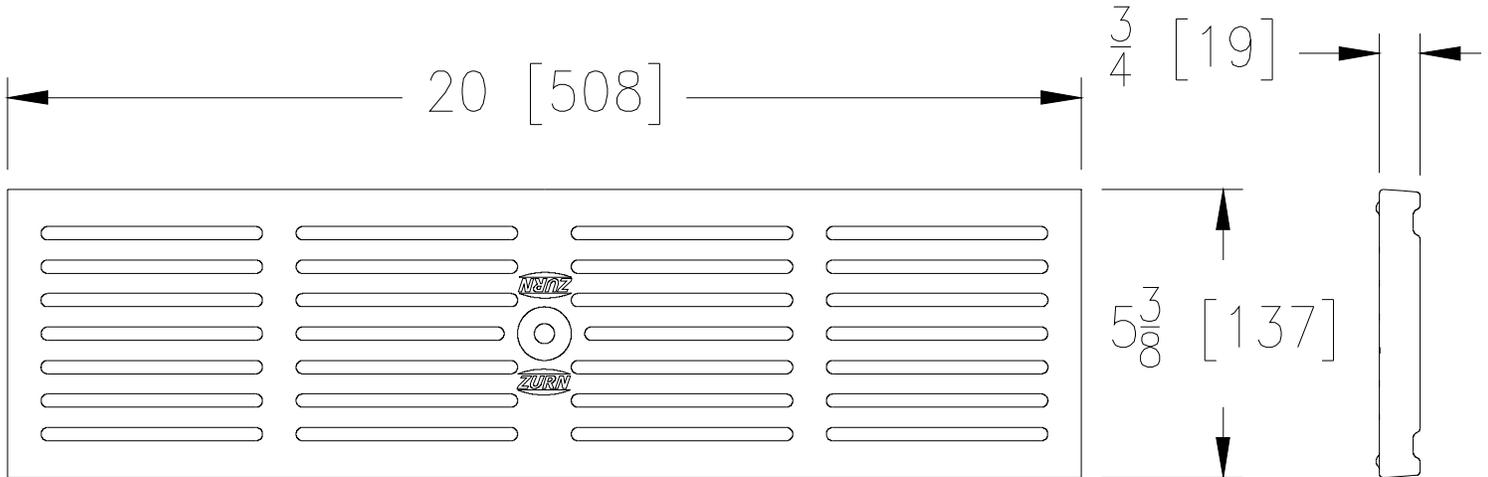

### HPS GRATE ENGINEERING SPECIFICATION: ZURN P6-HPS

20" [508mm] X 5-3/8" [137mm] Stainless Steel heel-proof slotted grate weighing 7.1 lbs per linear foot [10.5kg/m]. The grate has an open area of 17.0 in<sup>2</sup> per linear foot [361cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant\*, and ASTM A351 Grade CF8 (TYPE 304) and Grade CF8M (TYPE 316).

HPS - Heel-Proof Slotted	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	7.1 lbs/ft. [10.5kg/m]
Open Area:	17.0 in <sup>2</sup> /ft. [361cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




**P6-LD**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	38	57153	P6-LD

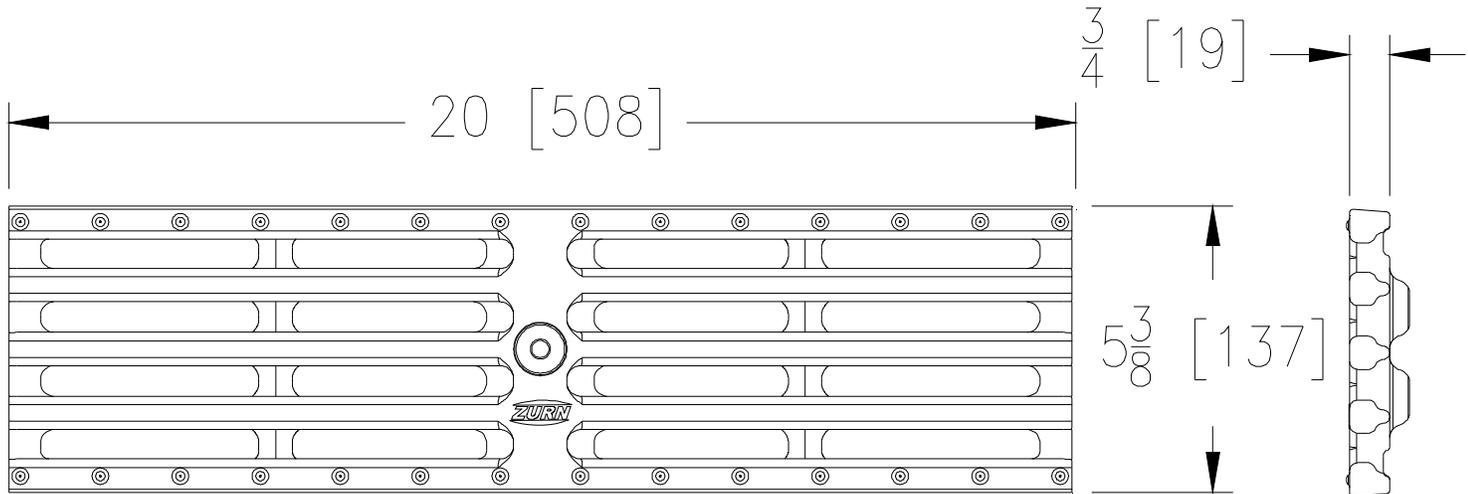

**LD GRATE ENGINEERING SPECIFICATION: ZURN P6-LD**

20" [508mm] X 5-3/8" [137mm] Ductile Iron longitudinally slotted grate weighing 6.7 lbs per linear foot [9.8kg/m]. The grate has an open area of 20.5 in<sup>2</sup> per linear foot [433cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, and ASTM A536 Grade 80-55-06.

<b>LD - Longitudinal Slotted</b>	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	6.7 lbs/ft. [9.8kg/m]
Open Area:	20.5 in <sup>2</sup> /ft. [433cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks,
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	No
FAA:	No




# P6-NBZ-USA

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	39	64054	P6-NBZ-USA

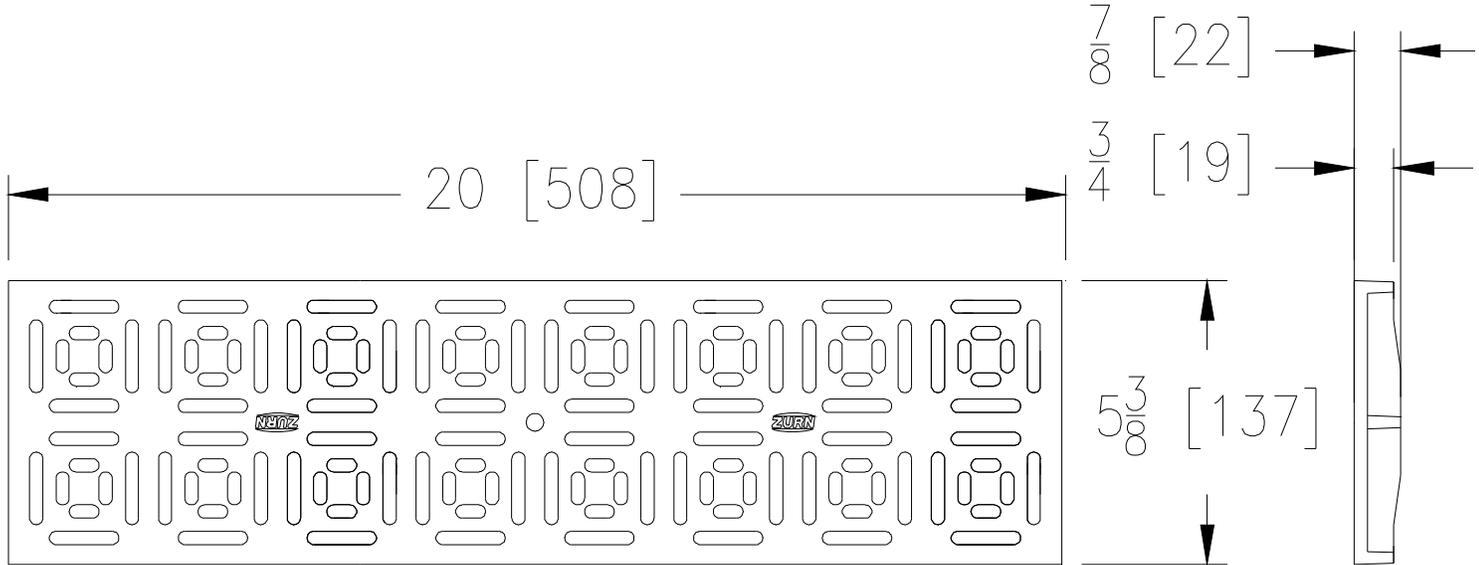

### NBZ-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-NBZ-USA

20" [508mm] X 5-3/8" [137mm] Nickel Bronze decorative grate weighing 5.7 lbs per linear foot [8.5kg/m]. The grate has an open area of 16.9 in<sup>2</sup> per linear foot [357cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM B584 Copper alloy NO. C997.



NBZ-USA - Decorative	
Material:	Nickel Bronze
DIN Rating:	Class A
Weight:	5.7 lbs/ft. [8.5kg/m]
Open Area:	16.9 in <sup>2</sup> /ft. [357cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-PDE-USA

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	40	84474	P6-PDE-USA

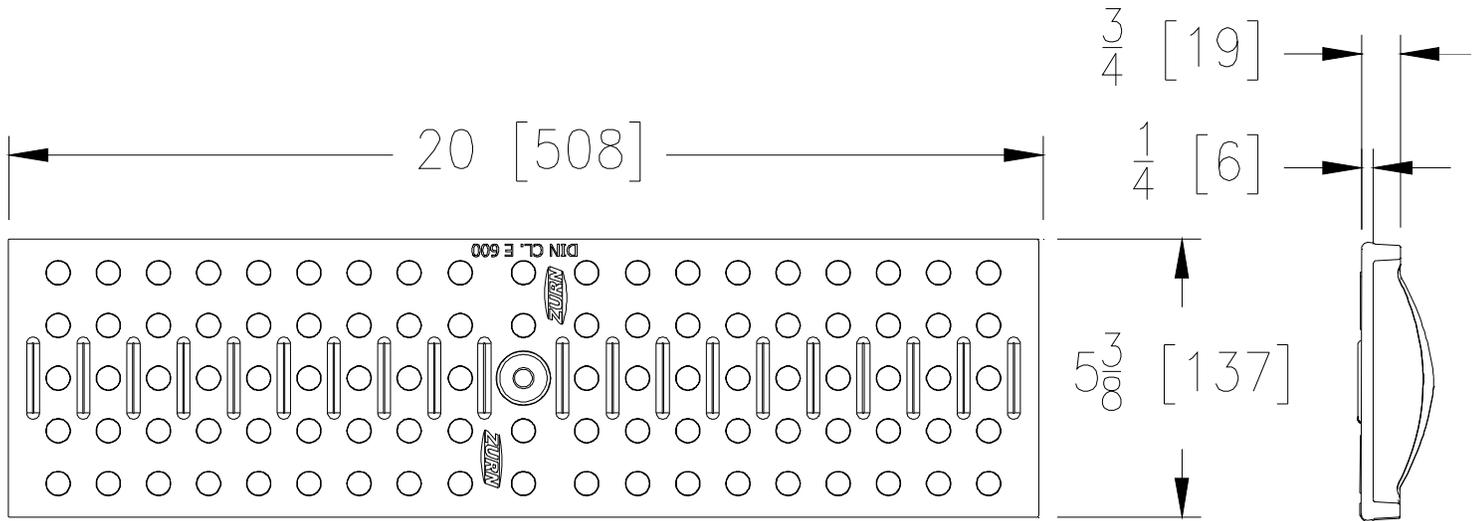

### PDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-PDE-USA

20" [508mm] X 5-3/8" [137mm] Ductile Iron perforated grate weighing 7.4 lbs per linear foot [11.2kg/m]. The grate has an open area of 9.13 in<sup>2</sup> per linear foot [193cm<sup>2</sup>/m]. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA Compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.



PDE-USA - Decorative	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	7.4 lbs/ft. [11.2kg/m]
Open Area:	9.13 in <sup>2</sup> /ft. [193cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Fork Lift Rated
Slot Width/Hole Size:	29/64" [11.5mm]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-PG

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	41	64078	P6-PG

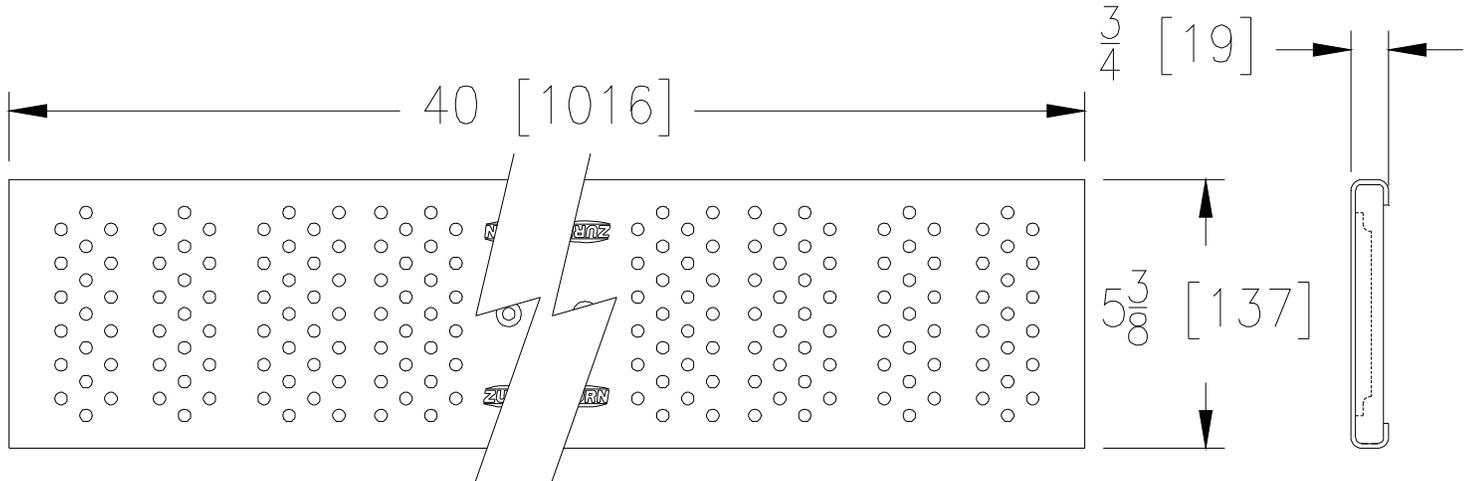

### PG GRATE ENGINEERING SPECIFICATION: ZURN P6-PG

40" [1016mm] X 5-3/8" [137mm] Galvanized steel fabricated perforated grate weighing 1.6 lbs per linear foot [2.3kg/m]. The grate has an open area of 5.3 in<sup>2</sup> per linear foot [112cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant. Carbon steel conforms to ASTM A653 Type CS-B, galvanized coating designation G60, minimum spangle.



PG - Fabricated Perforated	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.6 lbs/ft. [2.3kg/m]
Open Area:	5.3 in <sup>2</sup> /ft. [112cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-PGR

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	42	301238	P6-PGR

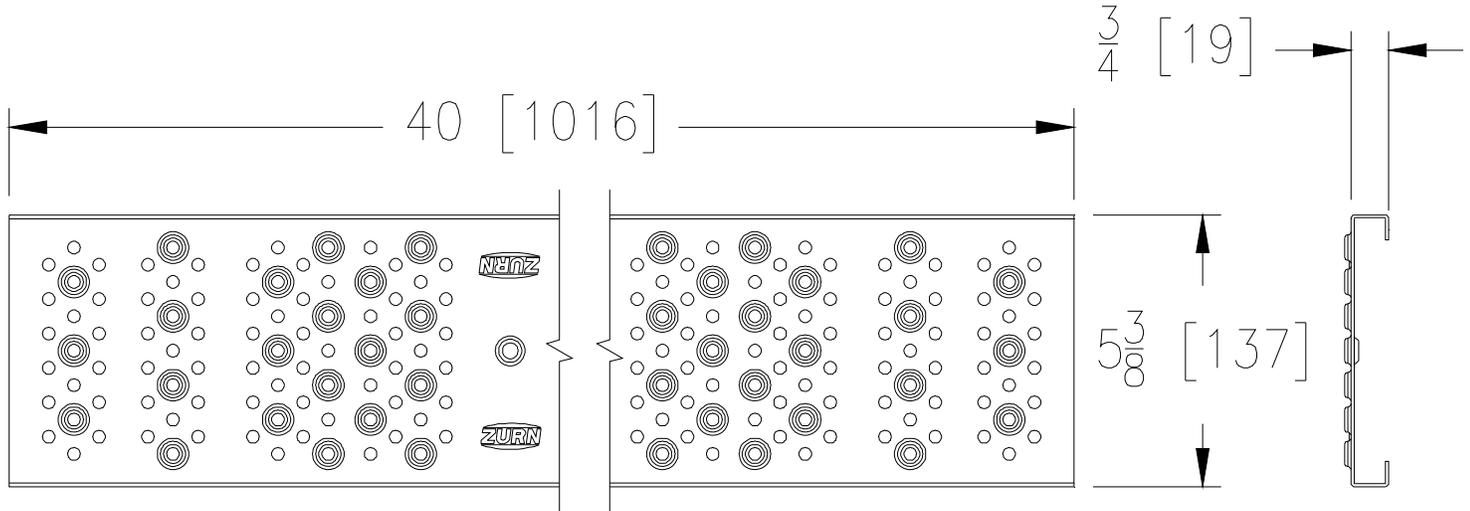

### PGR GRATE ENGINEERING SPECIFICATION: The Zurn P6-PGR

40" [1016mm] X 5-3/8" [137mm] Galvanized steel fabricated raised perforated grate weighing 1.8 lbs per linear foot [2.7kg/m]. The grate has an open area of 5.3 in<sup>2</sup> per linear foot [112cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A653, Type CS-B. Galvanized coating designation G60, minimum spangle.



PGR - Raised Perforated	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.8 lbs/ft. [2.7kg/m]
Open Area:	5.3 in <sup>2</sup> /ft. [112cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-PPC

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	43	94149	P6-PPC

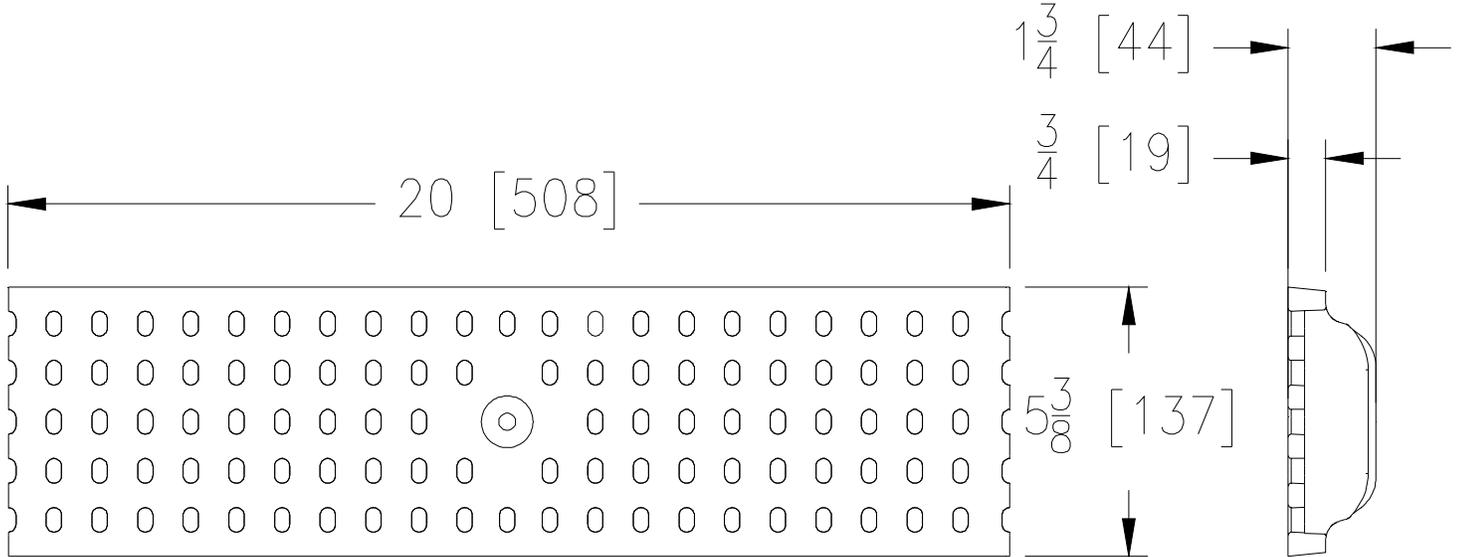

### PPC GRATE ENGINEERING SPECIFICATION: ZURN P6-PPC

20" [508mm] X 5-3/8" [137mm] Vinylester perforated plastic grate weighing 3.3 lbs per linear foot [4.9kg/m]. The grate has an open area of 6.6 in<sup>2</sup> per linear foot [140cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty and ADA Compliant, and Interplastic CORVE8300 or Reichhold DION 9100 or equivalent.



PPC - Perforated Grate	
Material:	Vinylester
DIN Rating:	Class C
Weight:	3.3 lbs/ft. [4.9kg/m]
Open Area:	6.6 in <sup>2</sup> /ft. [140cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Heavy Loads, Non-metallic, Chemical
Slot Width/Hole Size:	19/64" [7.5mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-PS**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	44	64078	P6-PS

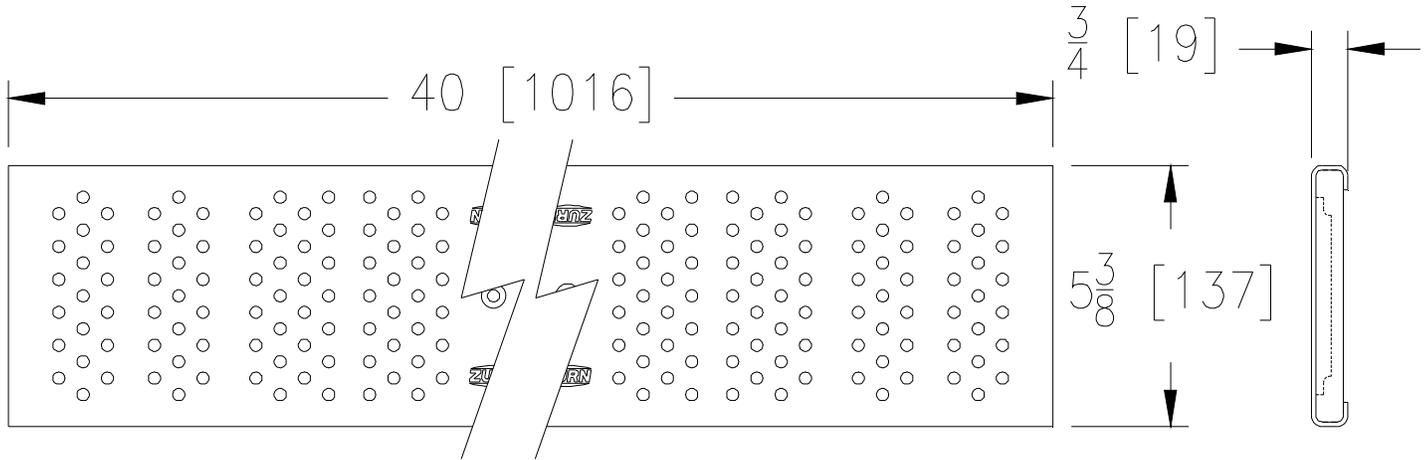

**PS GRATE ENGINEERING SPECIFICATION: ZURN P6-PS**

40" [1016mm] X 5-3/8" [137mm] Stainless steel perforated grate weighing 1.8 lbs per linear foot [2.7kg/m]. The grate has an open area of 5.3 in<sup>2</sup> per linear foot [112cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A240 Type 304 (or 316 by request).



<b>PS - Fabricated Perforated</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.8 lbs/ft. [2.7kg/m]
Open Area:	5.3 in <sup>2</sup> /ft. [112cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-PSR

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	45	301238	P6-PSR

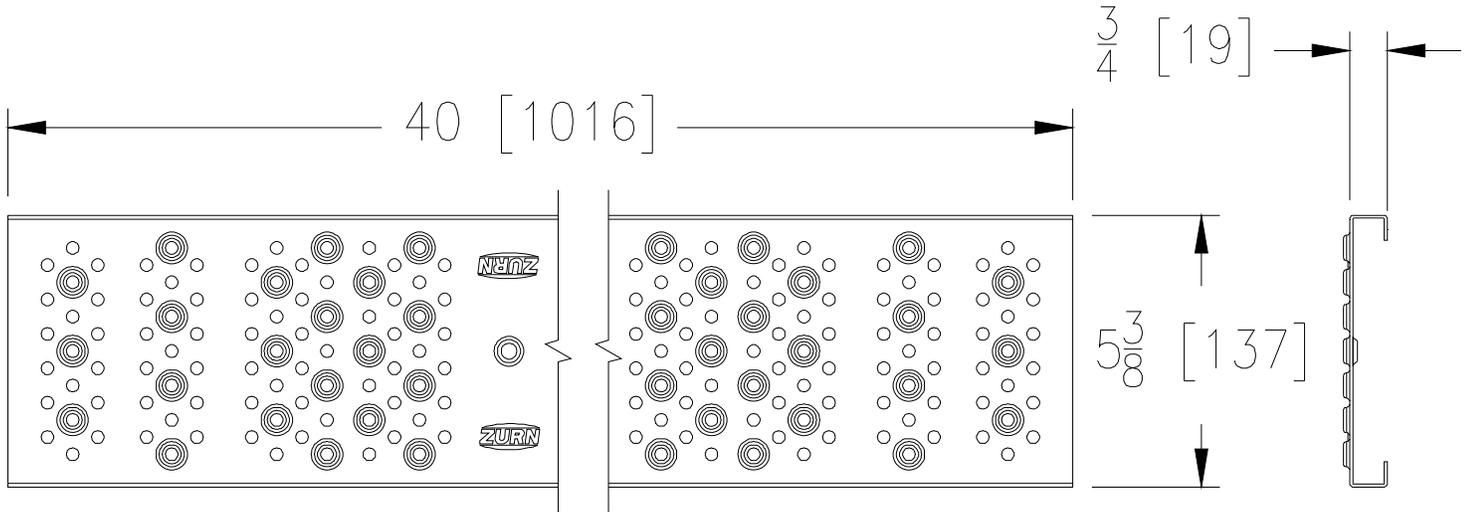

### PSR GRATE ENGINEERING SPECIFICATION: ZURN P6-PSR

40" [1016mm] X 5-3/8" [137mm] Stainless steel fabricated raised perforated grate weighing 1.9 lbs per linear foot [2.8kg/m]. The grate has an open area of 5.3 in<sup>2</sup> per linear foot [112cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A240 Type 304 (or 316 by request).



PSR - Raised Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.9 lbs/ft. [2.8kg/m]
Open Area:	5.3 in <sup>2</sup> /ft. [112cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-RFG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	46	64063	P6-RFG

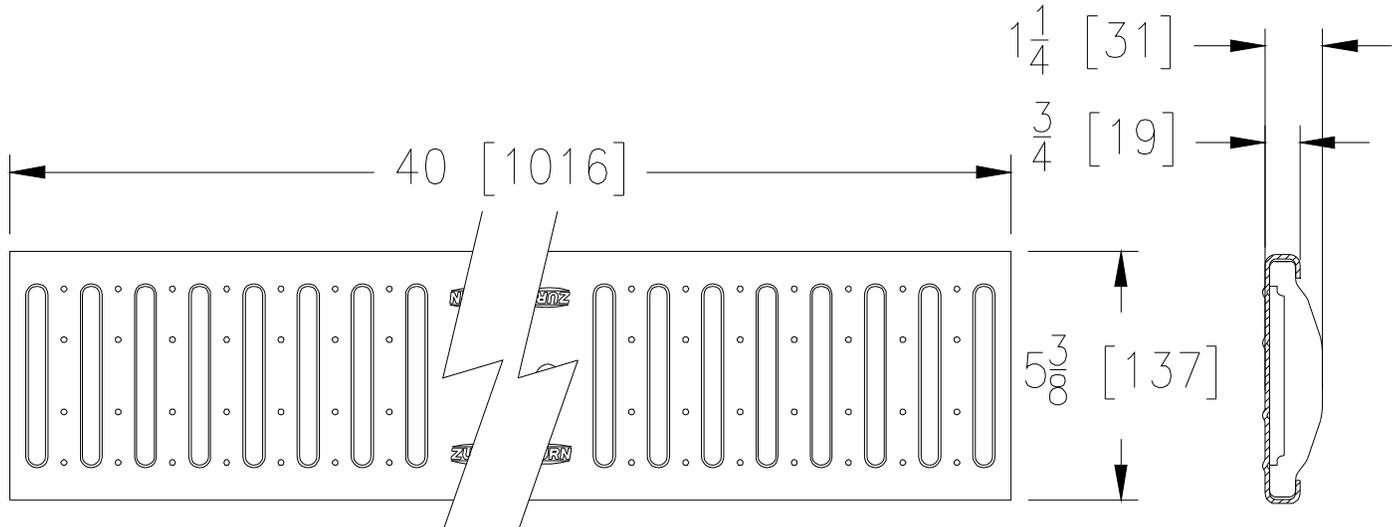

**RFG GRATE ENGINEERING SPECIFICATION: ZURN P6-RFG**

40" [1016mm] X 5-3/8" [137mm] Galvanized steel reinforced slotted grate weighing 4.0 lbs per linear foot [5.9kg/m]. The grate has an open area of 12.0 in<sup>2</sup> per linear foot [254cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, and ADA compliant\*. Galvanized skin conforms to ASTM A653, galvanized coating designation G60, and minimum spangle. Galvanized (hot dip) reinforcements conform to ASTM A123.

<b>RFG - Reinforced Slotted</b>	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class B
Weight:	4.0 lbs/ft. [5.9kg/m]
Open Area:	12.0 in <sup>2</sup> /ft. [254cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light Vehicle
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-RFGC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	47	308340	P6-RFGC

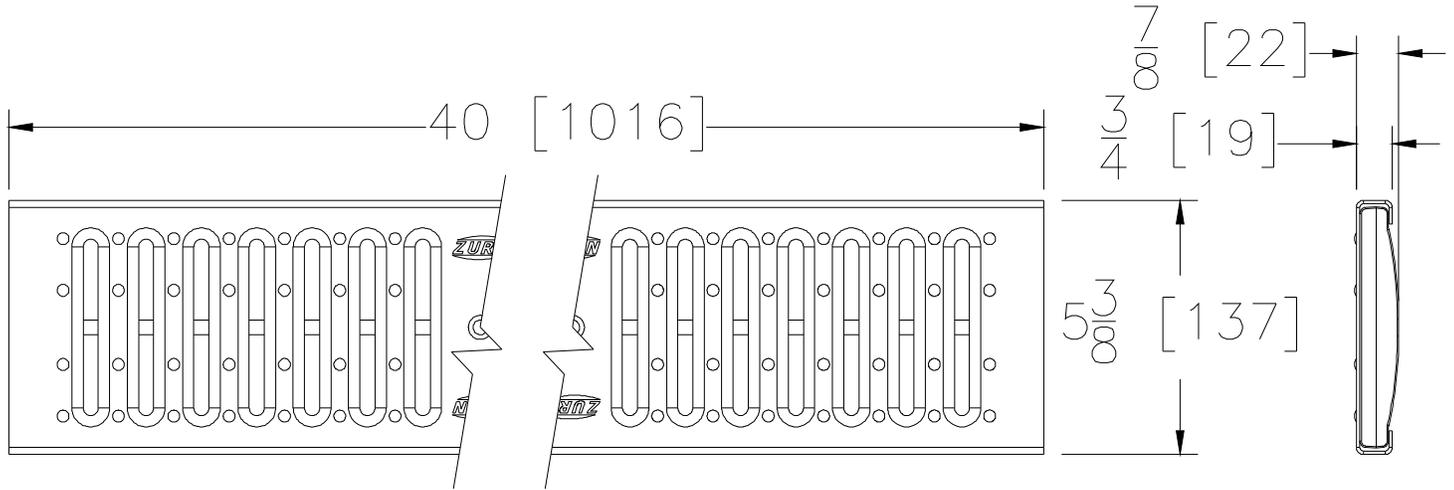

### RFGC GRATE ENGINEERING SPECIFICATION: ZURN P6-RFGC

40" [1016mm] X 5-3/8" [137mm] Galvanized steel reinforced slotted grate weighing 4.8 lbs per linear foot [7.2kg/m]. The grate has an open area of 12.0 in<sup>2</sup> per linear foot [254cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA compliant\* and H-20 load rated. Galvanized skin conforms to ASTM A653, galvanized coating designation G60 and minimum spangle. Ductile Iron reinforcement ASTM A536 Grade 80-55-06. Galvanized (hot dip) conform to ASTM A123.

RFGC - Reinforced Slotted	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.8 lbs/ft. [7.2kg/m]
Open Area:	12.0 in <sup>2</sup> /ft. [254cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	Yes*
H-20:	Yes
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-RFSC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	48	308340	P6-RFSC

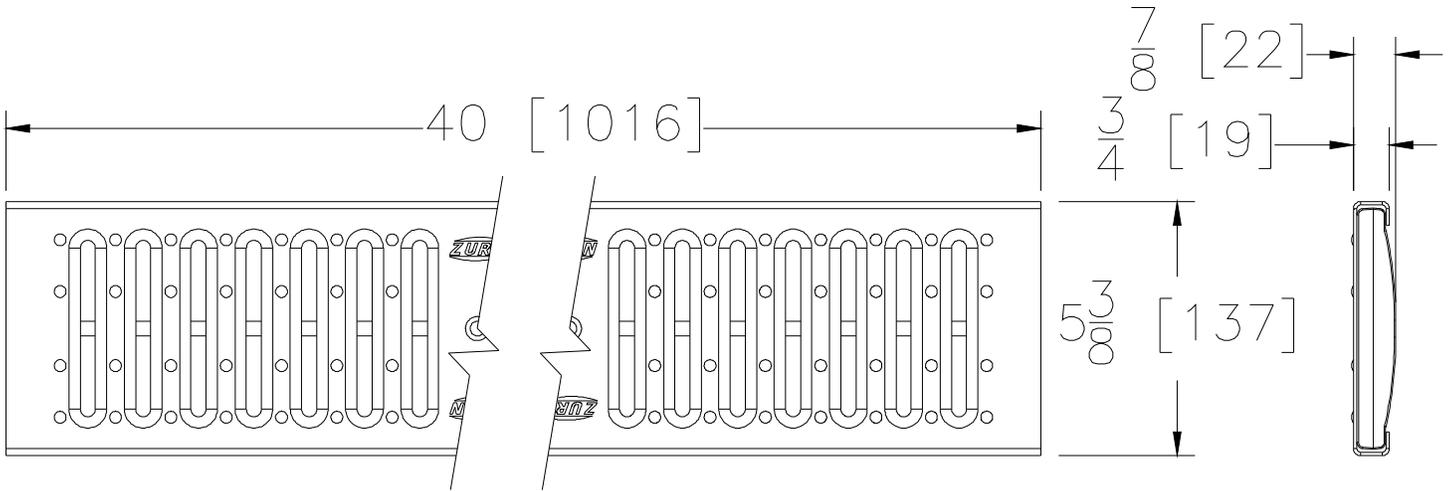

### RFSC GRATE ENGINEERING SPECIFICATION: ZURN P6-RFSC

40" [1016mm] X 5-3/8" [137mm] Stainless steel reinforced slotted grate weighing 5.2 lbs per linear foot [7.9kg/m]. The grate has an open area of 12.0 in<sup>2</sup> per linear foot [254cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA compliant\* and H-20 load rating. Stainless steel grate conforms to ASTM A351 Type 304 (Grade CF8M Type 316 by request) cast body and A-240 TYPE 304 (or 316 by request) for grate skin.

RFSC - Reinforced Slotted	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.2 lbs/ft. [7.9kg/m]
Open Area:	12.0 in <sup>2</sup> /ft. [254cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	Yes*
H-20:	Yes
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P6-RPG

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	49	64078	P6-RPG

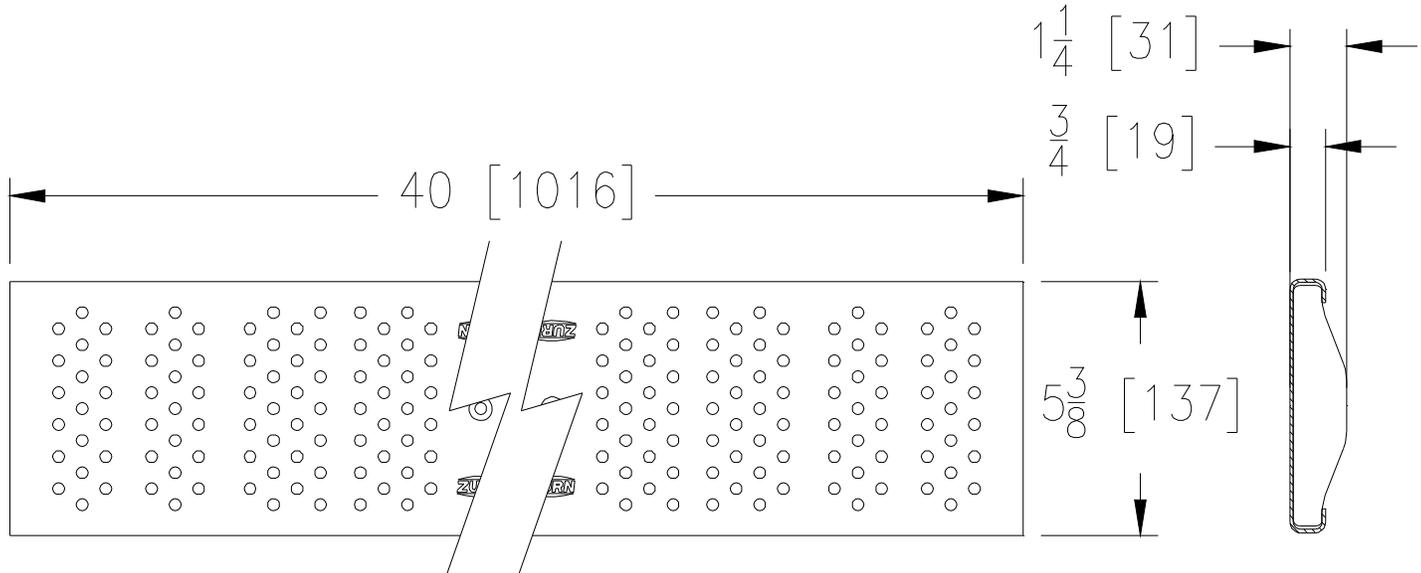

### RPG GRATE ENGINEERING SPECIFICATION: ZURN P6-RPG

40" [1016mm] X 5-3/8" [137mm] Galvanized steel reinforced perforated grate weighing 4.0 lbs per linear foot [5.9kg/m]. The grate has an open area of 5.3 in<sup>2</sup> per linear foot [112cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA Compliant, and ASTM A653. Type CS-B Galvanized Coating designation G60, minimum spangle. Ductile Iron reinforcements ASTM A536-B4 Grade 80-55-06. Galvanized (hot dip) conform to ASTM A123.

RPG - Reinforced Perforated	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	4.0 lbs/ft. [5.9kg/m]
Open Area:	5.3 in <sup>2</sup> /ft. [112cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-RPGC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	50	308342	P6-RPGC

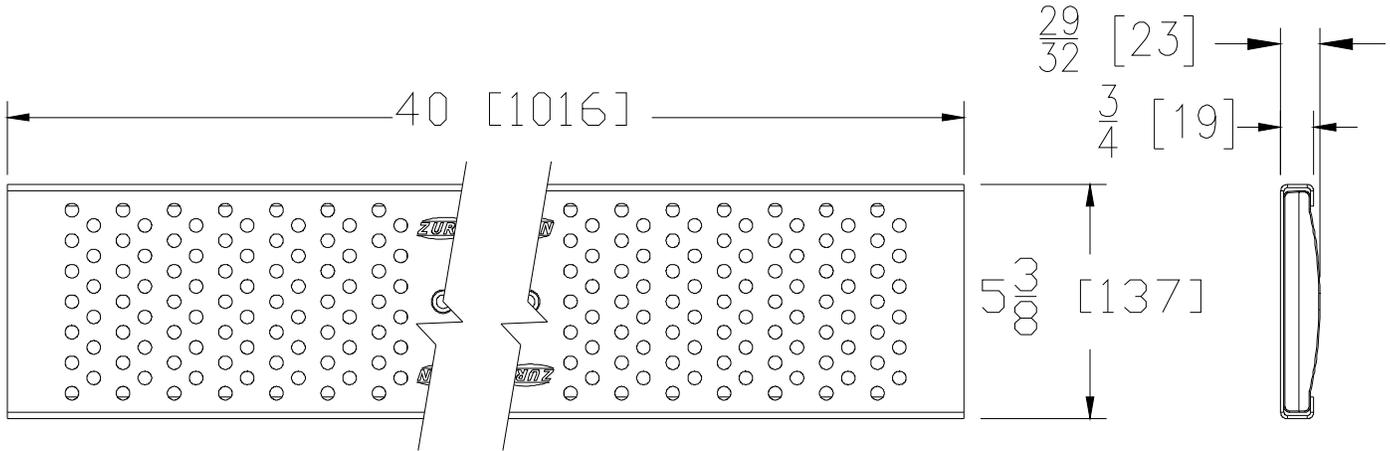

### RPGC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPGC

40" [1016mm] X 5-3/8" [137mm] Galvanized steel reinforced perforated grate weighing 4.7 lbs per linear foot [6.9kg/m]. The grate has an open area of 8.3 in<sup>2</sup> per linear foot [175cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated, and ASTM A653. Galvanized coating designation G60, minimum spangle. Ductile Iron reinforcement ASTM A536 Grade 80-55-06. Galvanized (hot dip) reinforcements conform to ASTM A123.

RPGC - Reinforced Perforated	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.7 lbs/ft. [6.9kg/m]
Open Area:	8.3 in <sup>2</sup> /ft. [175cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	No




# P6-RPGR

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	51	304738	P6-RPGR

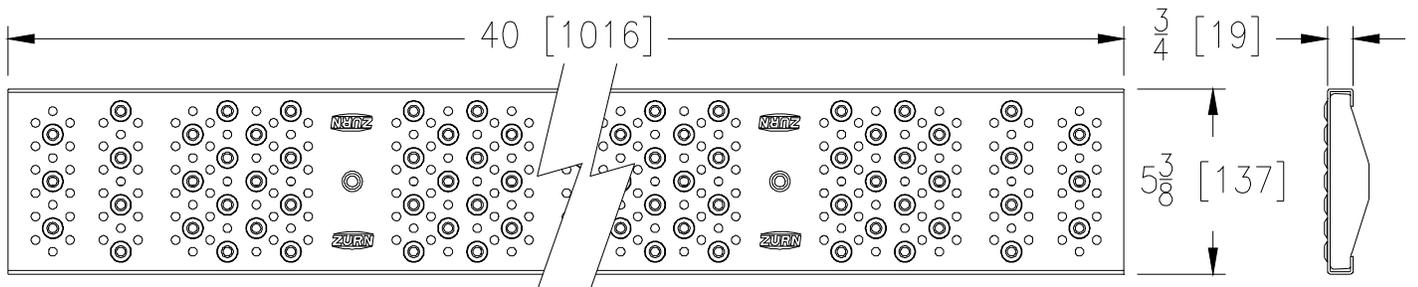

### RPGR GRATE ENGINEERING SPECIFICATION: ZURN P6-RPGR

40" [1016mm] X 5-3/8" [137mm] Galvanized steel reinforced perforated grate weighing 3.8 lbs per linear foot [5.6kg/m]. The grate has an open area of 5.3 in<sup>2</sup> per linear foot [112cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium Duty, ADA Compliant. Galvanized Sheet conforms to ASTM Specification A653, Type CS-B Galvanized coating designation G60, minimum spangle. Hot Dip Galvanizing on Reinforcement conforms to ASTM Specification A123.

RPGR - Reinforced Perforated Reverse Punch	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	3.8 lbs/ft. [5.6kg/m]
Open Area:	5.3 in <sup>2</sup> /ft. [112cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-RPGRC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	52	308341	P6-RPGRC

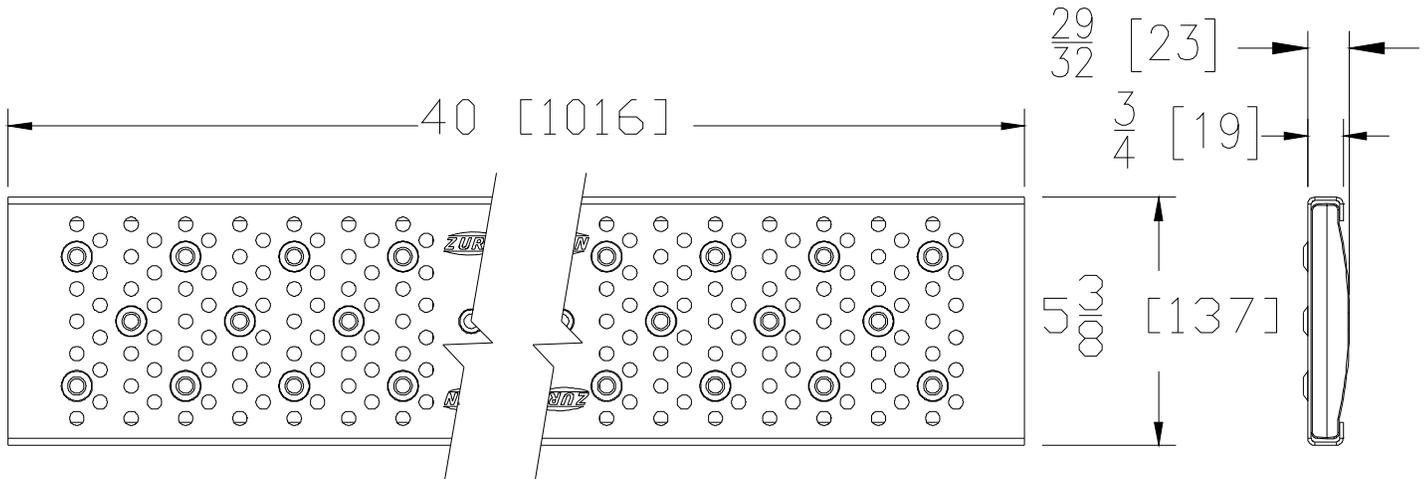

### RPGRG GRATE ENGINEERING SPECIFICATION: ZURN P6-RPGRC

40" [1016mm] X 5-3/8" [137mm] Galvanized steel reinforced perforated grate weighing 4.7 lbs per linear foot [7.0kg/m]. The Grate has an open area of 8.3 in<sup>2</sup> per linear foot [175cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated, and ASTM A653. Type CS-B Galvanized coating designation G60, minimum spangle. Ductile Iron reinforcement ASTM A536 Grade 80-55-06. Galvanized (hot dip) reinforcements conform to ASTM A123.

RPGRG - Reinforced Perforated Reverse Punch	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.7 lbs/ft. [7.0kg/m]
Open Area:	8.3 in <sup>2</sup> /ft. [175cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	No




# P6-RPSC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	53	308342	P6-RPSC

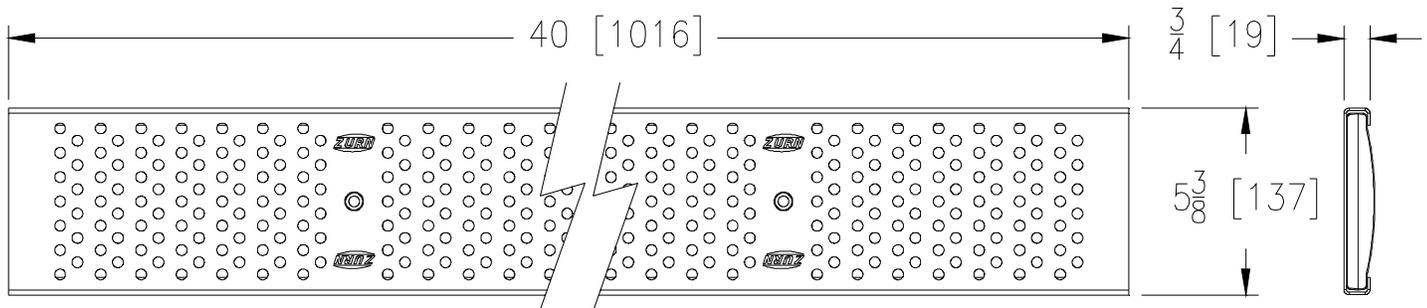

### RPSC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPSC

40" [1016mm] X 5-3/8" [137mm] Stainless steel reinforced perforated grate weighing 5.1 lbs per linear foot [7.5kg/m]. The grate has an open area of 8.3 in<sup>2</sup> per linear foot [175cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated, ADA Compliant. Stainless steel grate conforms to ASTM A351 Grade CF8 Type 304 (Grade CF8M, Type 316 by request) for cast reinforcement and A-240 TYPE 304 for grate skin.

RPSC - Reinforced Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.1 lbs/ft. [7.5kg/m]
Open Area:	8.3 in <sup>2</sup> /ft. [175cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	No




**P6-RPSRC**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	54	308341	P6-RPSRC

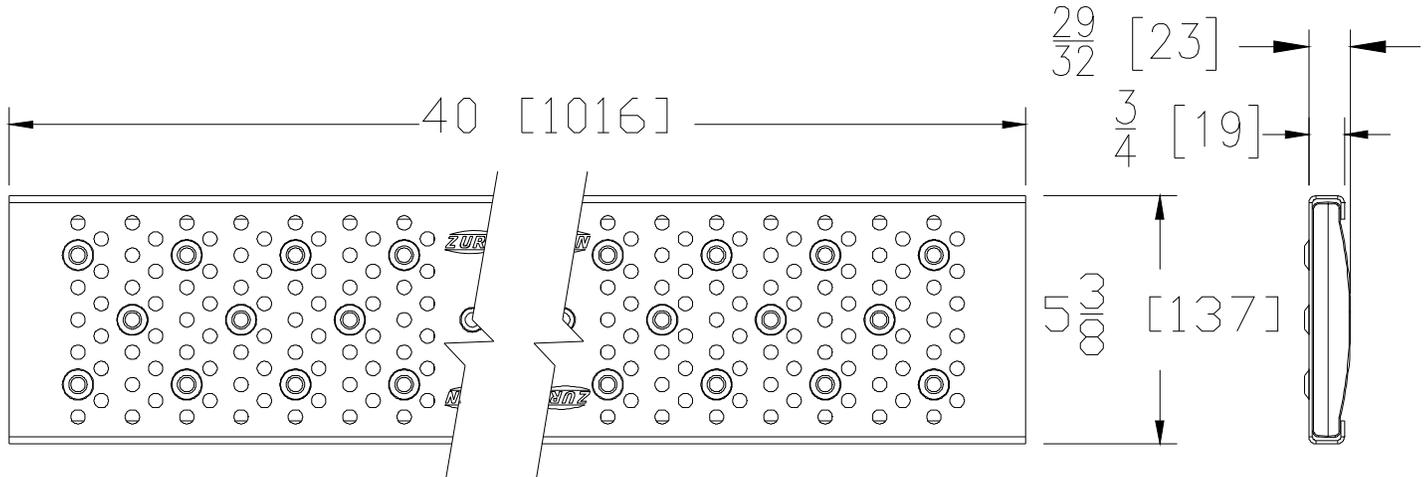

**RPSRC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPSRC**

40" [1016mm] X 5-3/8" [137mm] Stainless steel reinforced perforated grate weighing 5.1 lbs per linear foot [7.5kg/m]. The grate has an open area of 8.3 in<sup>2</sup> per linear foot [175cm<sup>2</sup>/m]. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated. Stainless steel grate conforms to ASTM A351 Grade CF8 Type 304 (Grade CF8M, Type 316 by request) for cast reinforcement and A-240 TYPE 304 for grate skin.

<b>RPSRC - Reinforced Perforated Reverse Punch</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.1 lbs/ft. [7.5kg/m]
Open Area:	8.3 in <sup>2</sup> /ft. [175cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16" [8mm]
ADA:	Yes
H-20:	Yes
FAA:	No




**P6-SBG**  
6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	55	94221	P6-SBG

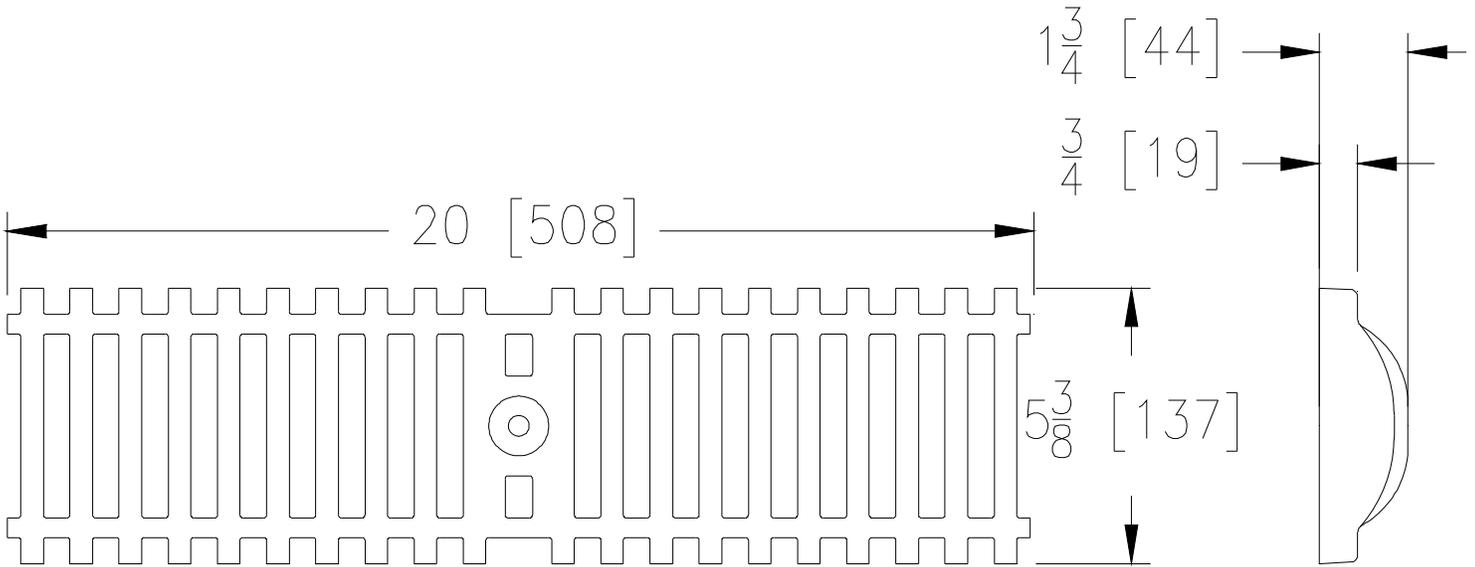

**SBG GRATE ENGINEERING SPECIFICATION: ZURN P6-SBG**

20" [508mm] X 5-3/8" [137mm] Stainless steel cast bar grate weighing 9.4 lbs per linear foot [14.1kg/m]. The grate has an open area of 27.7 in<sup>2</sup> per linear foot [587cm<sup>2</sup>/m], DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated, and A351 Grade CF8 Type 304 (Grade CF8M (TYPE 316 by request).

<b>SBG - Cast Bar Grate</b>	
Material:	Stainless Steel
DIN Rating:	Class E
Weight:	9.4 lbs/ft. [14.1kg/m]
Open Area:	27.7 in <sup>2</sup> /ft. [587cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Dynamic Loads
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	No
H-20:	Yes
FAA:	Yes




**P6-SC**  
6 [152] Wide S.S. Solid Cover

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	56	60746	P6-SC

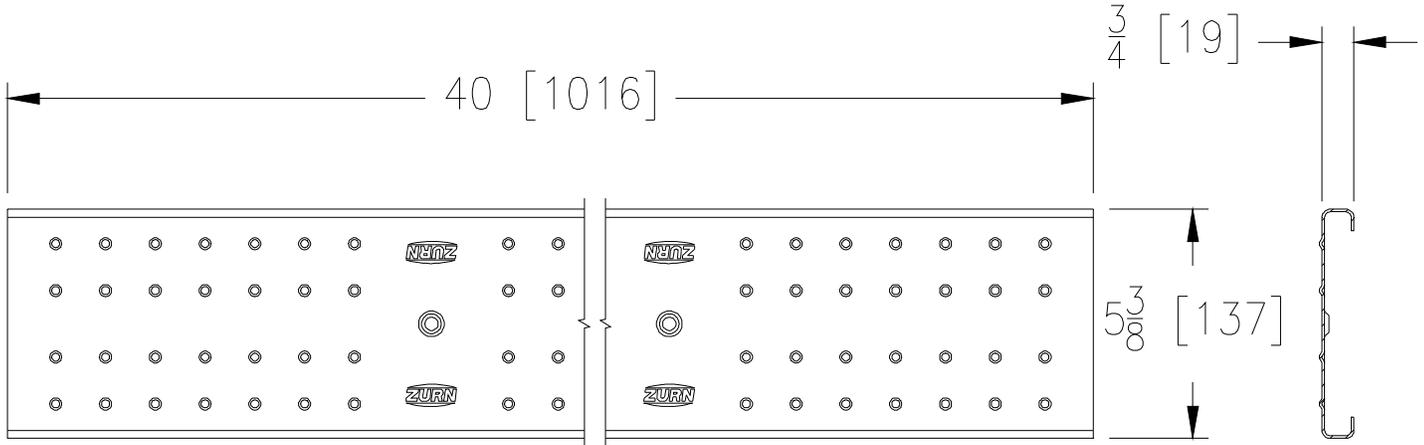

**SC GRATE ENGINEERING SPECIFICATION: ZURN P6-SC**

40" [1016mm] X 5-3/8" [137mm] Stainless steel fabricated solid cover weighing 1.6 lbs per linear foot [2.4kg/m]. Grate conforms to DIN rating of A, ANSI Rating of Light-Duty, ADA Compliant and ASTM specification A240 Type 304 (316 by request).

<b>SC - S.S. Solid Cover</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.6 lbs/ft. [2.4kg/m]
Open Area:	N/A
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	No
FAA:	No




# P6-SCD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	57	64255	P6-SCD

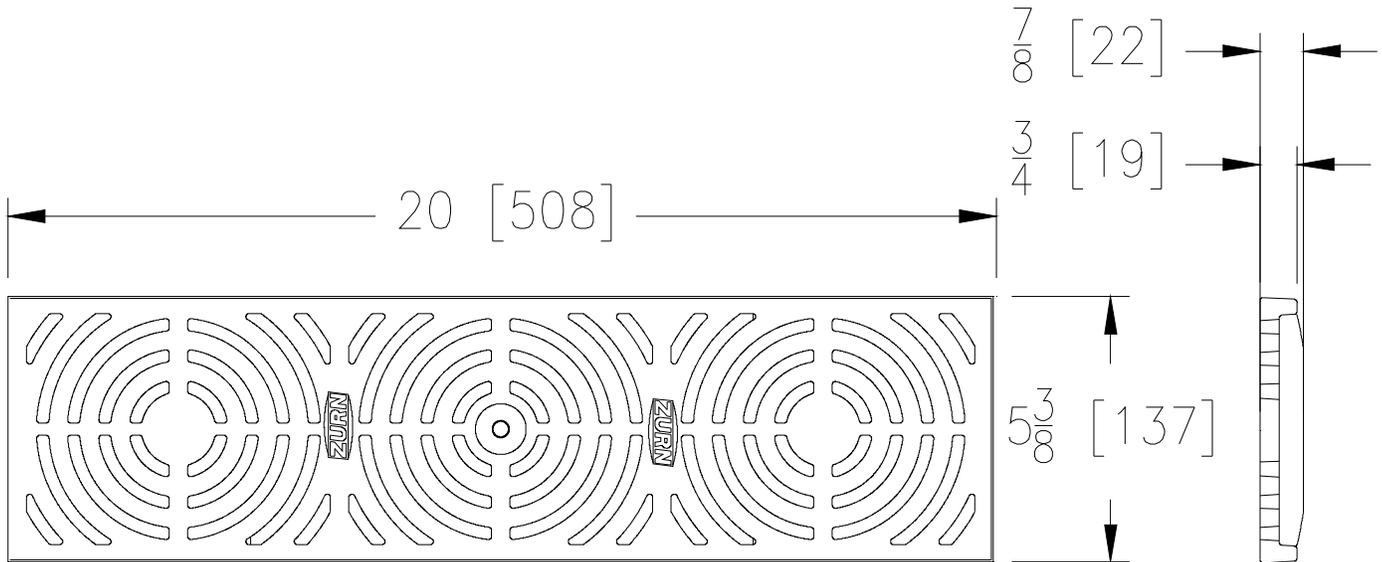

### SCD GRATE ENGINEERING SPECIFICATION: ZURN P6-SCD

20" [508mm] X 5-3/8" [137mm] Stainless steel circular decorative grate weighing 7.2 lbs per linear foot [10.8kg/m]. The grate has an open area of 17.6 in<sup>2</sup> per linear foot [374cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA Compliant and ASME A351 Grade CF8 Type 304 (Grade CF8M by request Type 316).

SCD - Circular Decorative	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	7.2 lbs/ft. [10.8kg/m]
Open Area:	17.6 in <sup>2</sup> /ft. [374cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




**P6-SDD**  
**6 [152] Wide Decorative Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	58	67506	P6-SDD

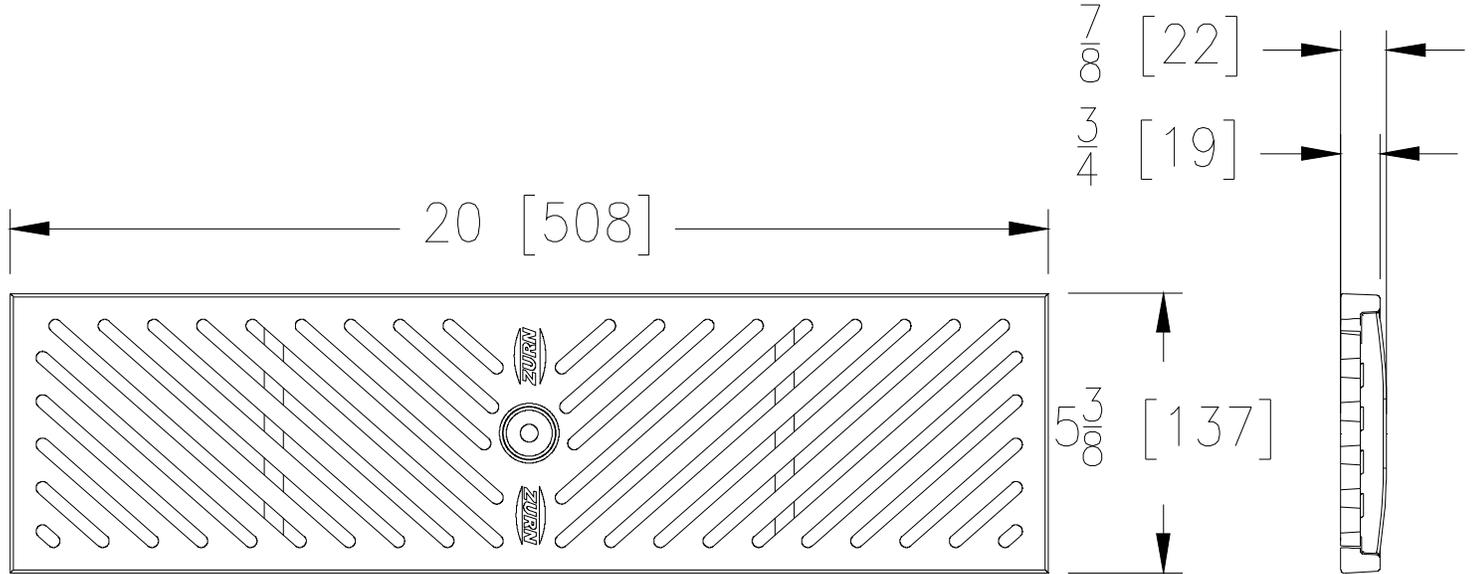

**SDD GRATE ENGINEERING SPECIFICATION: ZURN P6-SDD**

20" [508mm] X 5-3/8" [137mm] Stainless steel diagonal decorative grate weighing 6.3 lbs per linear foot [9.5kg/m]. The grate has an open area of 17.9 in<sup>2</sup> per linear foot [377cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA Compliant and ASME A351 Grade CF8 TypeE 304 (Grade CF8M Type 316 by request).

<b>SDD - Diagonal Decorative</b>	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	6.3 lbs/ft. [9.5kg/m]
Open Area:	17.9 in <sup>2</sup> /ft. [377cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-SMG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	59	64249	P6-SMG

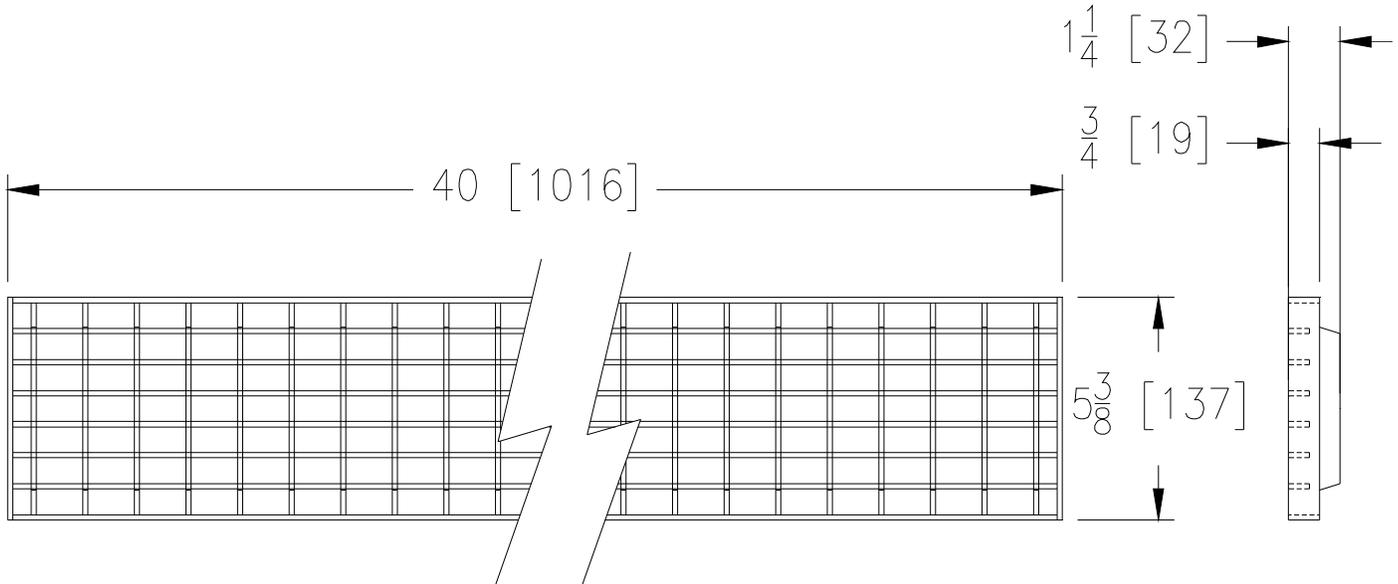

### SMG GRATE ENGINEERING SPECIFICATION: ZURN P6-SMG

40" [1016mm] X 5-3/8" [137mm] Stainless steel mesh screen grate weighing 3.9 lbs per linear foot [5.9kg/m]. The grate has an open area of 47.0 in<sup>2</sup> per linear foot [994cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium Duty and ASTM A351 Grade CF8 Type 304 (Grade CF8M Type 316 by request).

SMG - Mesh Screen	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	3.9 lbs/ft. [5.9kg/m]
Open Area:	47.0 in <sup>2</sup> /ft. [994cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light Traffic
Slot Width/Hole Size:	1-1/8" [29mm]
ADA:	No
H-20:	No
FAA:	No




# P6-SOG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	60	64054	P6-SOG

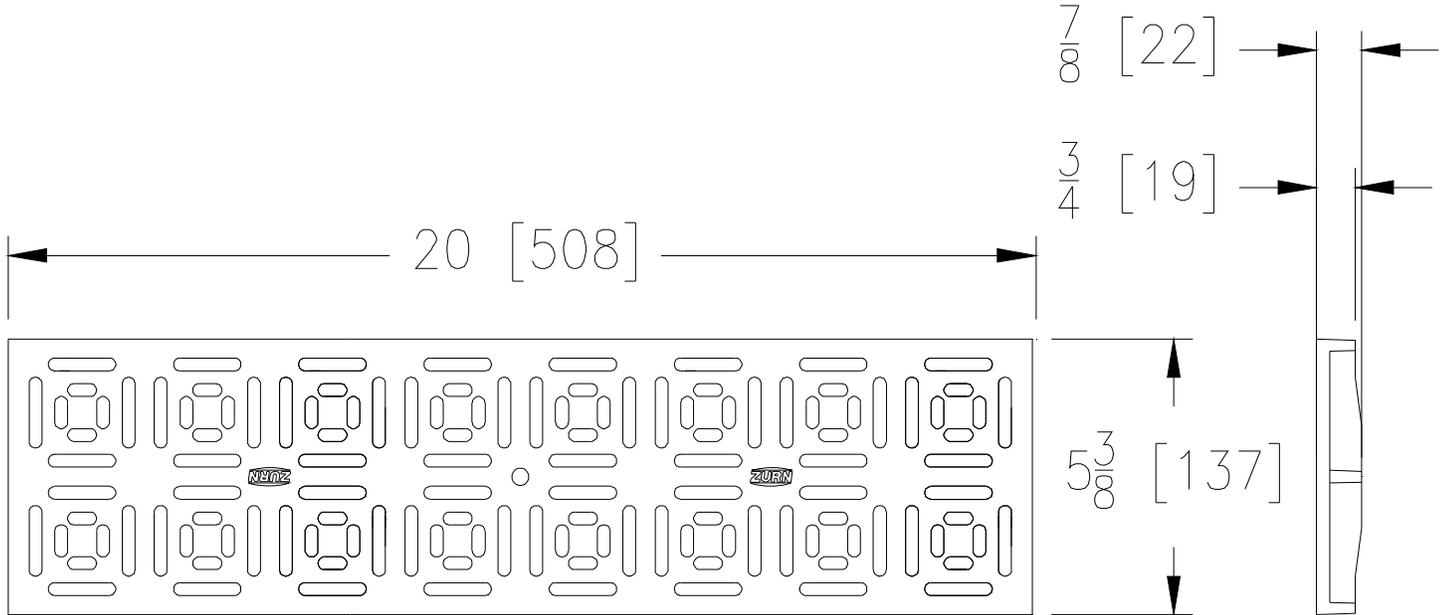

### SOG GRATE ENGINEERING SPECIFICATION: ZURN P6-SOG

20" [508mm] X 5-3/8" [137mm] Stainless steel ornamental grate weighing 5.6 lbs per linear foot [8.2kg/m]. The grate has an open area of 16.9 in<sup>2</sup> per linear foot [357cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA Compliant and ASTM A351 Grade CF8 Type 304 (Grade CF8M Type 316 by request).

SOG - Ornamental Grate	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	5.6 lbs/ft. [8.2kg/m]
Open Area:	16.9 in <sup>2</sup> /ft. [357cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes
H-20:	No
FAA:	No




# P6-SWG

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	61	94081	P6-SWG

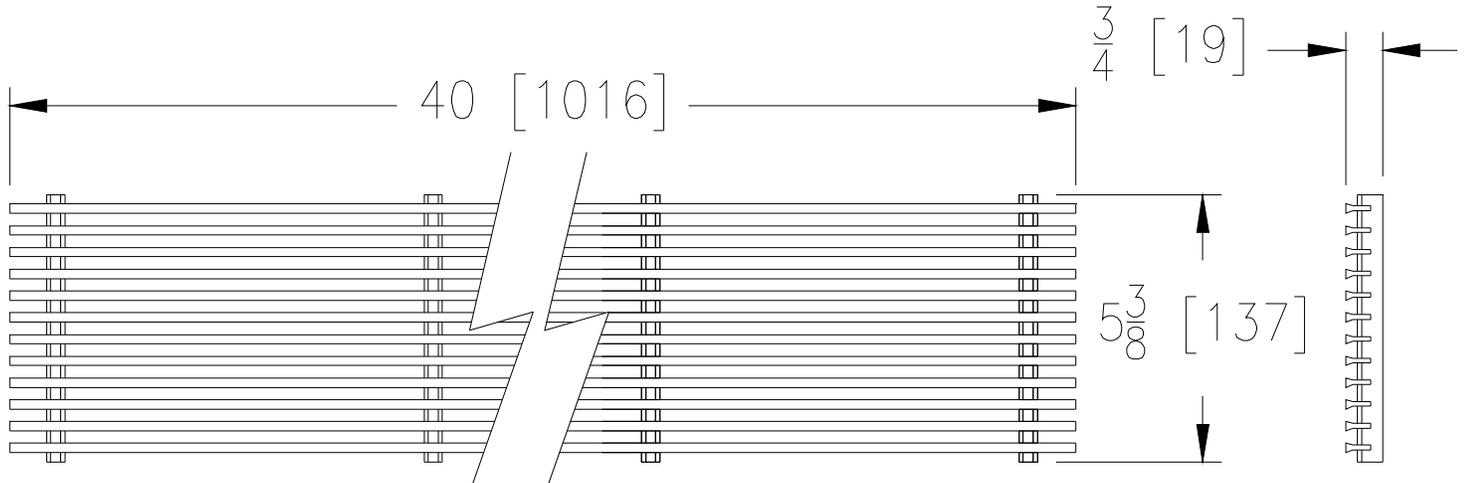

### SWG GRATE ENGINEERING SPECIFICATION: ZURN P6-SWG

40" [1016mm] X 5-3/8" [137mm] Stainless steel wire grate weighing 2.5 lbs per linear foot [3.6kg/m]. The grate has an open area of 37.5 in<sup>2</sup> per linear foot [794cm<sup>2</sup>/m]. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant\* and ASTM specification A-240 Type 304.



SWG - Wire Grate	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	2.5 lbs/ft. [3.6kg/m]
Open Area:	37.5 in <sup>2</sup> /ft. [794cm <sup>2</sup> /m]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4" [6.4mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P886-FGF

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	62	64355	P886-FGF

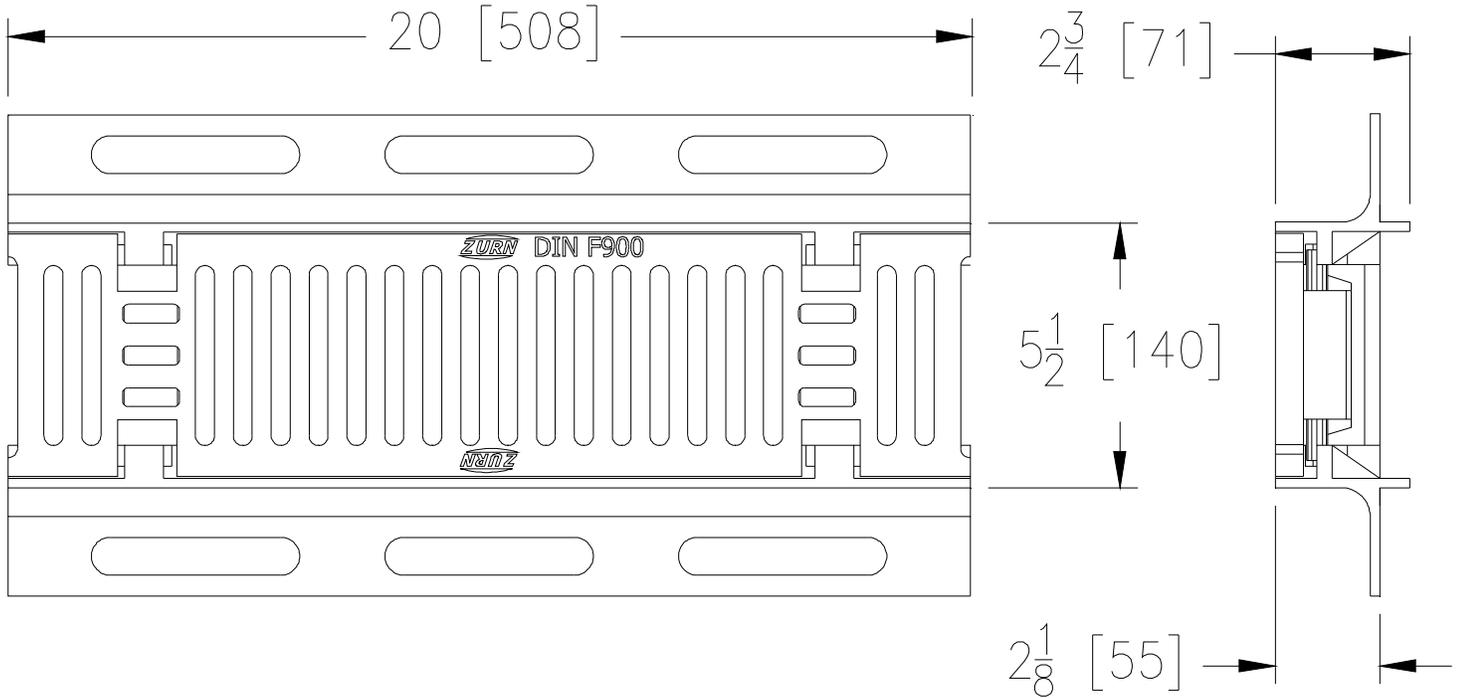

### FGF GRATE ENGINEERING SPECIFICATION: ZURN P886-FGF

20" [508mm] X 5-1/2" [140mm] Ductile Iron frame and grate weighing 18.7 lbs per linear foot [27.9kg/m]. The grate has an open area of 20.5 in<sup>2</sup> per linear foot [433cm<sup>2</sup>/m]. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

FGF - Ductile Frame & Grate	
Material:	Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [27.9kg/m]
Open Area:	20.5 in <sup>2</sup> /ft. [433cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Extra Heavy loads
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	No
H-20:	Yes
FAA:	Yes




# P886-FGF-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	63	64355	P886-FGF-USA

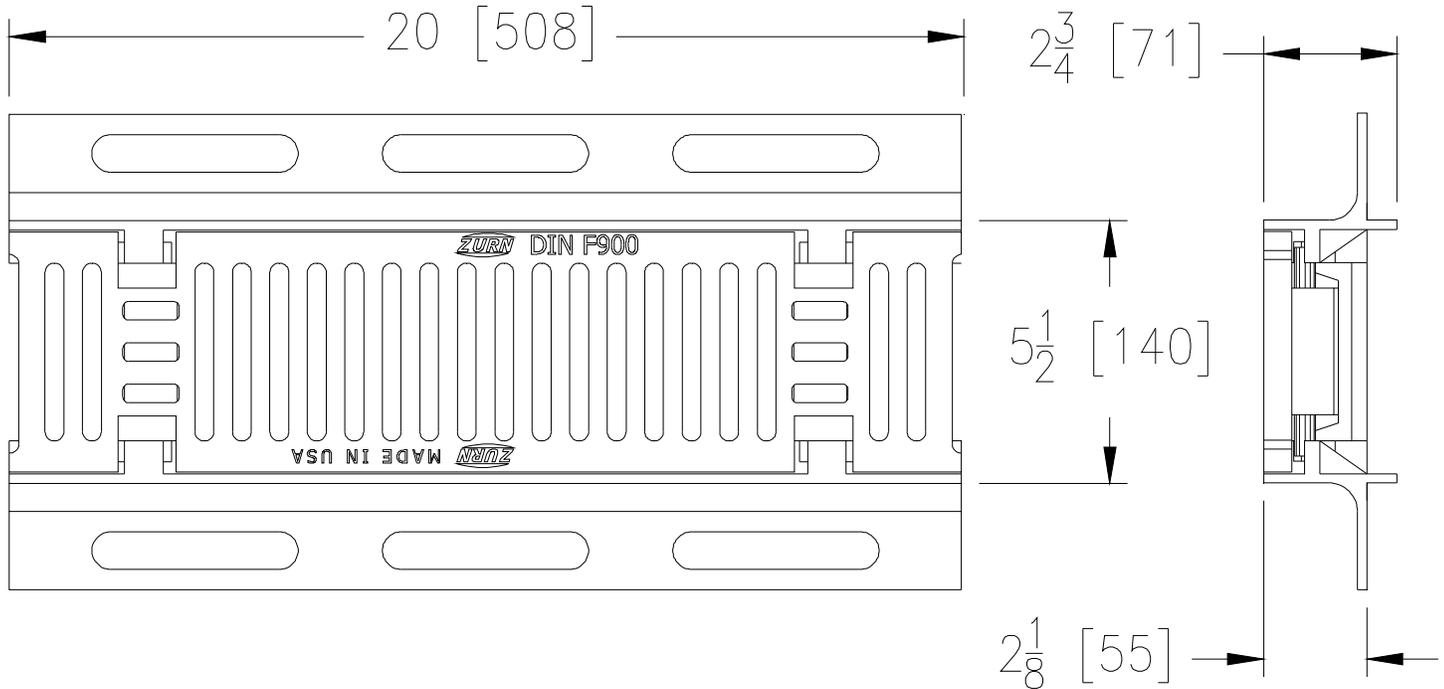

### FGF-USA GRATE ENGINEERING SPECIFICATION: ZURN P886-FGF-USA

20" [508mm] X 5-1/2" [140mm] Ductile Iron frame and grate weighing 18.7 lbs per linear foot [27.9kg/m]. The grate has an open area of 20.5 in<sup>2</sup> per linear foot [433cm<sup>2</sup>/m]. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated and ASTM A536 Grade 80-55-06.

\*\* Grate is shipped unpainted unless otherwise specified.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

FGF-USA - Ductile Frame & Grate	
Material:	Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [27.9kg/m]
Open Area:	20.5 in <sup>2</sup> /ft. [433cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Extra Heavy loads
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	No
H-20:	Yes
FAA:	Yes






# P886-GFG

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	64	64355	P886-GFG

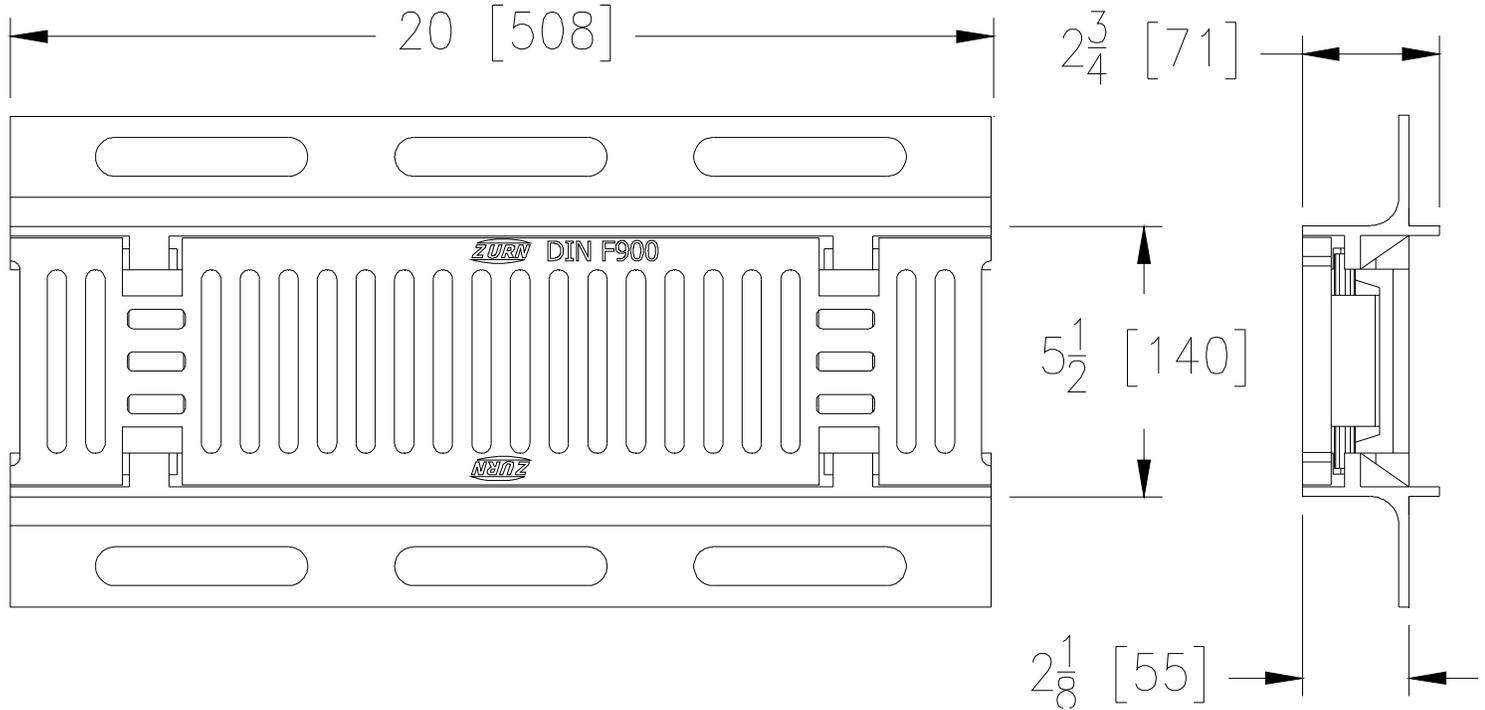

### GFG GRATE ENGINEERING SPECIFICATION: ZURN P886-GFG

20" [508mm] X 5-1/2" [140mm] Galvanized Ductile Iron frame and grate weighing 18.7 lbs per linear foot [27.9kg/m]. The grate has an open area of 20.5 in<sup>2</sup> per linear foot [433cm<sup>2</sup>/m]. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

GFG - Ductile Frame & Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [27.9kg/m]
Open Area:	20.5 in <sup>2</sup> /ft. [433cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Extra Heavy Loads
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	No
H-20:	Yes
FAA:	Yes




# P886-GFG-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	65	64355	P886-GFG-USA

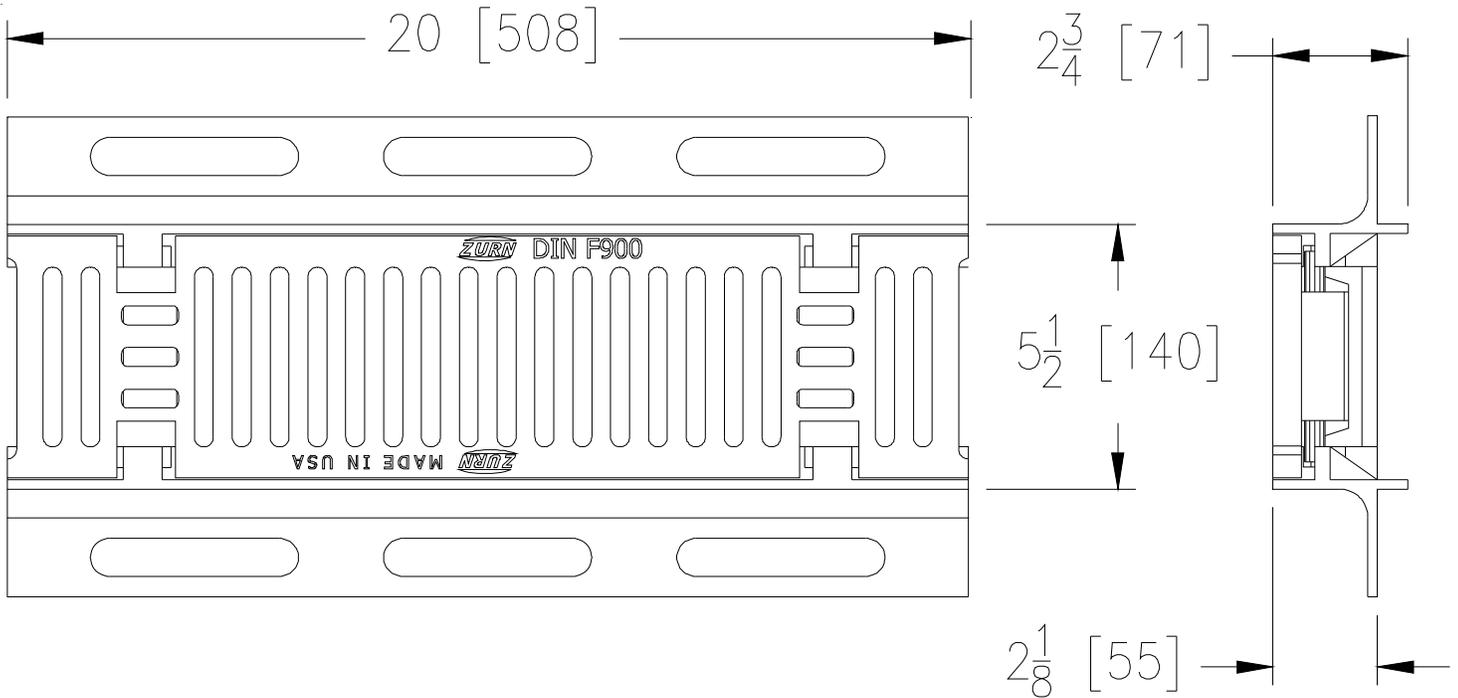

### GFG-USA GRATE ENGINEERING SPECIFICATION: ZURN P886-GFG-USA

20" [508mm] X 5-1/2" [140mm] Galvanized Ductile Iron frame and grate weighing 18.7 lbs per linear foot [27.9kg/m]. The grate has an open area of 20.5 in<sup>2</sup> per linear foot [433cm<sup>2</sup>/m]. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

GFG-USA - Ductile Frame & Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [27.9kg/m]
Open Area:	20.5 in <sup>2</sup> /ft. [433cm <sup>2</sup> /m]
ANSI Rating:	Special-Duty
Application:	Extra Heavy loads
Slot Width/Hole Size:	3/8" [9.5mm]
ADA:	No
H-20:	Yes
FAA:	Yes






# P886-HDD

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	66	94045	P886-HDD

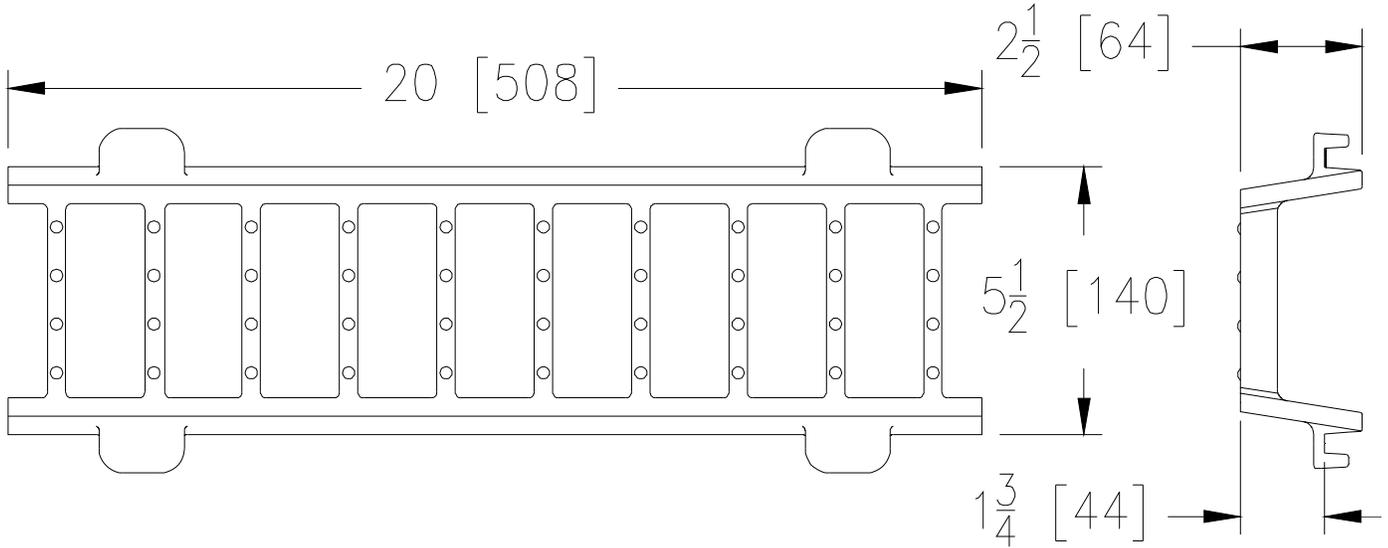

### HDD GRATE ENGINEERING SPECIFICATION: ZURN P886-HDD

20" [508mm] X 5-1/2" [140mm] Ductile Iron fixed grate weighing 7.7 lbs per linear foot [11.5kg/m]. The grate has an open area of 38.8 in<sup>2</sup> per linear foot [820cm<sup>2</sup>/m]. DIN rating of C, ANSI rating of Heavy-Duty, H-20/H-25 load rated and ASTM A536 Grade 80-55-06.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

HDD - Fixed Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	7.7 lbs/ft. [11.5kg/m]
Open Area:	38.8 in <sup>2</sup> /ft. [820cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Highways, Parking lots
Slot Width/Hole Size:	1-3/4" [44mm]
ADA:	No
H-20 / H-25:	Yes
FAA:	No






# P886-HR

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	67	94066	P886-HR

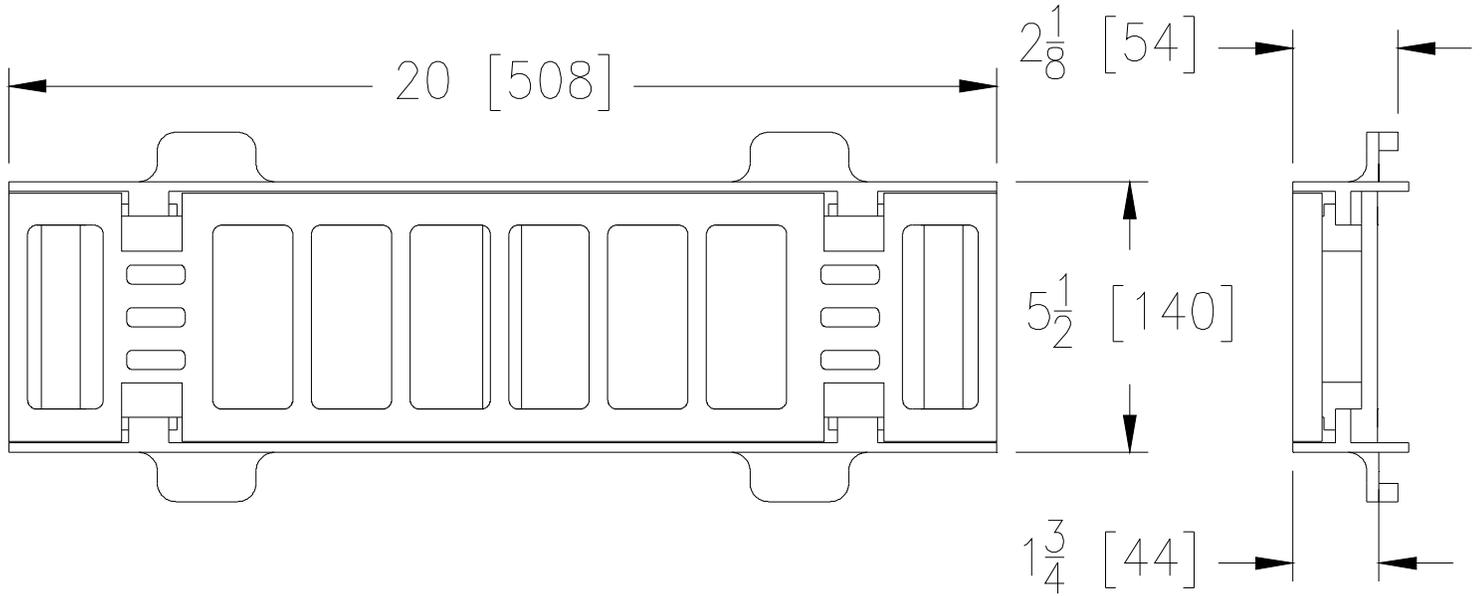

### HR GRATE ENGINEERING SPECIFICATION: ZURN P886-HR

20" [508mm] X 5-1/2" [140mm] Ductile Iron removable frame and grate weighing 12.3 lbs per linear foot [18.4kg/m]. The grate has an open area of 32.8 in<sup>2</sup> per linear foot [695cm<sup>2</sup>/m]. Frame and grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20/H-25 load rated and ASTM A536 Grade 80-55-06.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM



HR - Removable Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	12.3 lbs/ft. [18.4kg/m]
Open Area:	32.8 in <sup>2</sup> /ft. [695cm <sup>2</sup> /m]
ANSI Rating:	Heavy-Duty
Application:	Highways, Parking lots
Slot Width/Hole Size:	1-5/8" [41 mm]
ADA:	No
H-20 / H-25:	Yes
FAA:	No




# P886-PVS

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	68	94287	P886-PVS

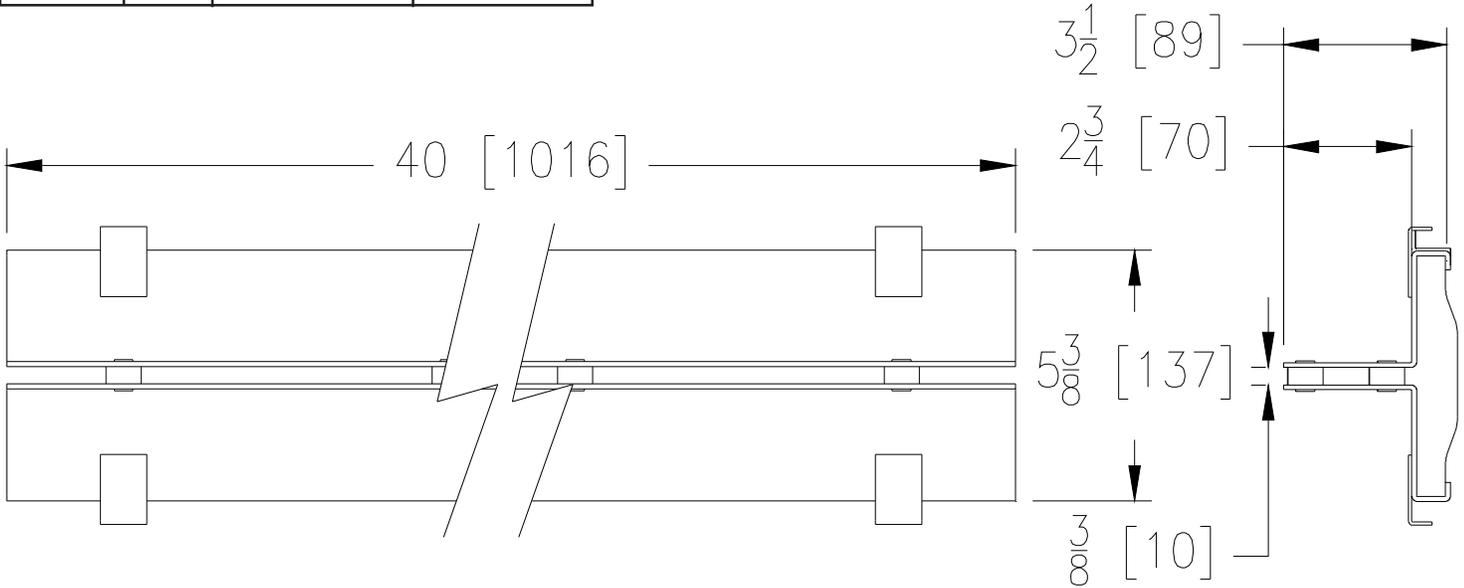

### PVS GRATE ENGINEERING SPECIFICATION: ZURN P886-PVS

40" [1016mm] X 5-3/8" [137 mm] Fabricated steel paver slot grate weighing 4.6 lbs per linear foot [6.9kg/m]. The grate has an open area of 6.0 in<sup>2</sup> per linear foot [128cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant and ASTM A36. (Only available with Z886 trench drain system)



PVS - Paver Slot Grate	
Material:	Carbon Steel
DIN Rating:	Class B
Weight:	4.6 lbs/ft. [6.9kg/m]
Open Area:	6.0 in <sup>2</sup> /ft. [128cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P886-PVSG

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	69	94287	P886-PVSG

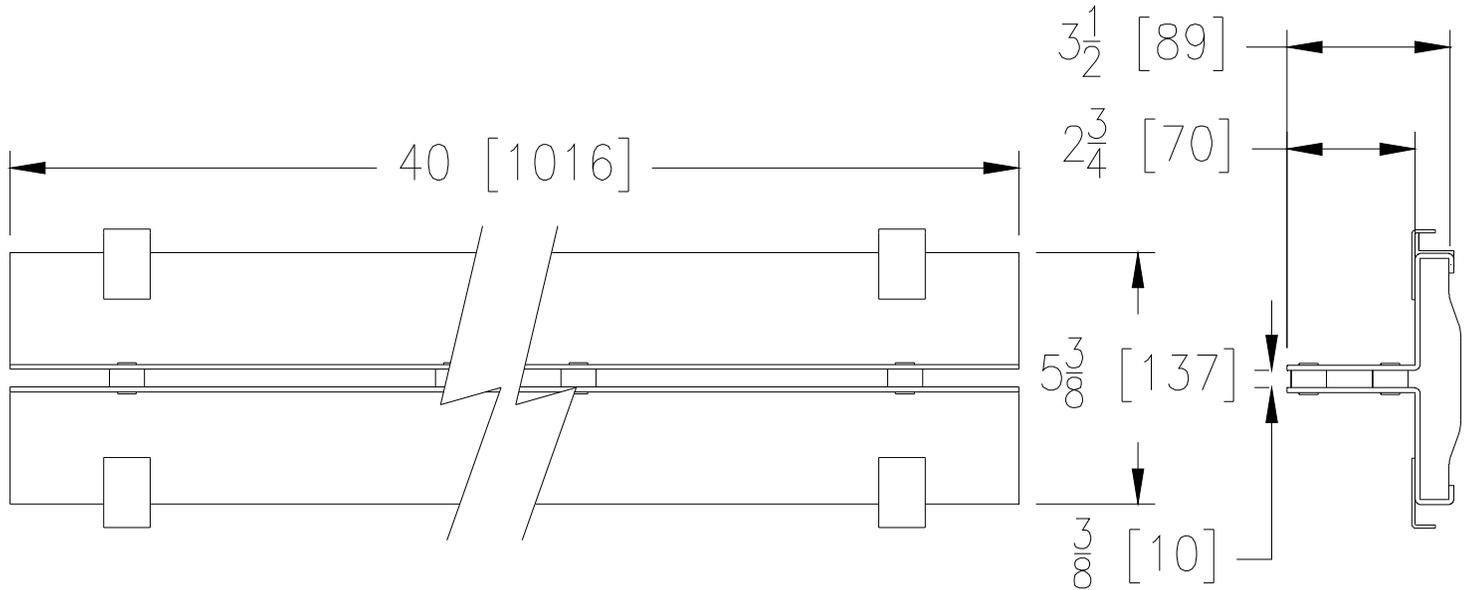

### PVSG GRATE ENGINEERING SPECIFICATION: ZURN P886-PVSG

40" [1016mm] X 5-3/8" [137mm] Fabricated galvanized steel paver slot grate weighing 4.6 lbs per linear foot [6.9kg/m]. The grate has an open area of 6.0 in<sup>2</sup> per linear foot [128cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant\* and ASTM A36. Galvanized (hot dip) conforms to ASTM A123. (Only available with Z886 trench drain system)



PVSG - Paver Slot Grate	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	4.6 lbs/ft. [6.9kg/m]
Open Area:	6.0 in <sup>2</sup> /ft. [128cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light-Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.




# P886-PVSS

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	70	94287	P886-PVSS

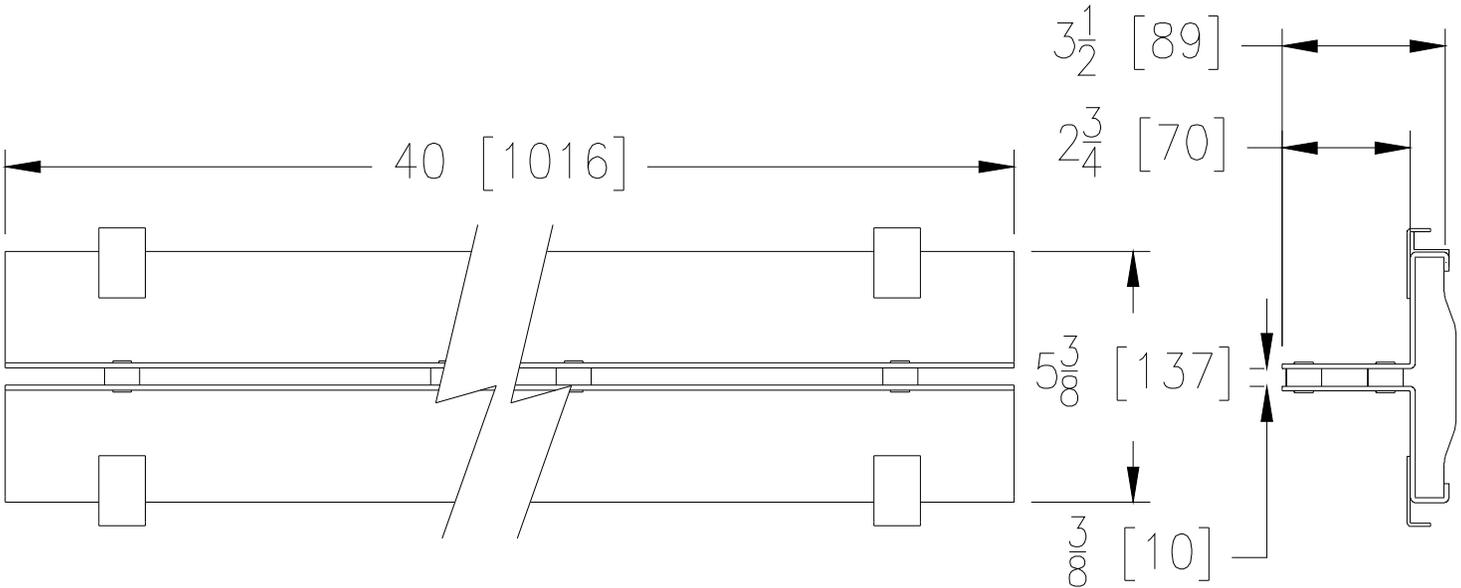

### PVSS GRATE ENGINEERING SPECIFICATION: ZURN P886-PVSS

40" [1016mm] X 5-3/8" [137mm] Fabricated stainless steel paver slot grate weighing 4.7 lbs per linear foot [6.9kg/m]. The grate has an open area of 6.0 in<sup>2</sup> per linear foot [128cm<sup>2</sup>/m]. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant\* and ASTM A-240 Type 304 (316 by request). (Only available with Z886 trench drain system)



PVSS - Paver Slot Grate	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	4.7 lbs/ft. [6.9kg/m]
Open Area:	6.0 in <sup>2</sup> /ft. [128cm <sup>2</sup> /m]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light-Traffic
Slot Width/Hole Size:	1/2" [12.7mm]
ADA:	Yes*
H-20:	No
FAA:	No

\* Elongated openings must be placed perpendicular to the dominant direction of travel.