

# INDEX PAGE for 6" Wide Grates / Covers

 - Click on "Item ID" to go to grate page, "Back to Index" will return you to this page.

P6-AWG .....	Aluminum Wire Grate	P6-NBZ-USA .....	Nickel Bronze Decorative Grate
P6-BCD .....	Circular Decorative, Bronze Grate	P6-PDE-USA .....	Perforated Decorative Grate, Ductile Iron
P6-BDC .....	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P6-PG .....	Fabricated Perforated Grate, Galvanized Steel
P6-BDD .....	Diagonal Decorative, Bronze Grate	P6-PGR .....	Wide Domestic Decorative Grate
P6-BDE .....	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P6-PPC .....	Perforated Plastic Class C Grate, Vinylester
P6-BDE-USA .....	Slotted Grate, Black Acid Resistant Epoxy Coated Ductile Iron	P6-PS .....	Fabricated Perforated Grate, Stainless Steel
P6-BG .....	Slotted Bar Grate, Galvanized Ductile Iron	P6-PSR .....	Fabricated Raised Perforated Grate, Stainless Steel
P6-BZ .....	Bronze Decorative Grate	P6-RFG .....	Reinforced Slotted Grate, Galvanized Steel
P6-DBG .....	Slotted Bar Grate, Dura-Coated Ductile Iron	P6-RFGC .....	Reinforced Slotted Grate, Galv. Steel & Galv. Ductile Iron
P6-DC .....	Solid Cover, Dura-Coated Ductile Iron	P6-RFSC .....	Reinforced Slotted Grate, Stainless Steel
P6-DCD .....	Circular Decorative Grate, Ductile Iron	P6-RPG .....	Reinforced Perforated Grate, Galvanized Steel
P6-DCE-USA .....	Solid Cover, Dura-Coated Ductile Iron	P6-RPGC .....	Reinforced Perforated Grate, Galvanized Steel & Galvanized Ductile Iron
P6-DDD .....	Diagonal Decorative Grate, Ductile Iron	P6-RPGR .....	Reinforced Perforated Grate, Galvanized Steel
P6-DGC .....	Slotted Grate, Ductile Iron	P6-RPGRC .....	Reinforced Perforated Grate, Galvanized Steel & Galvanized Ductile Iron
P6-DGC-USA .....	Slotted Grate, Ductile Iron	P6-RPSC .....	Reinforced Perforated, Class C Grate, Stainless Steel
P6-DGE .....	Slotted Grate, Ductile Iron	P6-RPSRC .....	Reinforced Perforated Reverse Punch Grate, Stainless Steel
P6-DGE-USA .....	Slotted Grate, Ductile Iron	P6-SBG .....	Cast Bar Grate, Stainless Steel
P6-DOG .....	Ornamental Grate, Ductile Iron	P6-SC .....	Fabricated Stainless Steel Solid Cover
P6-DTW .....	Decorative Tidal Wave Grate, Ductile Iron	P6-SCD .....	Circular Decorative Grate, Stainless Steel
P6-DWV .....	Decorative Wave Grate, Ductile Iron	P6-SDD .....	Diagonal Decorative Grate, Stainless Steel
P6-FG .....	Fabricated Slotted Grate, Galvanized Steel	P6-SMG .....	Stainless Steel Mesh Screen Grate
P6-FS .....	Slotted Grate, Stainless Steel	P6-SOG .....	Stainless Steel Ornamental Grate
P6-GDC .....	Slotted Grate, Galvanized Ductile Iron	P6-SWG .....	Stainless Steel Wire Grate
P6-GDC-USA .....	Slotted Grate, Galvanized Ductile Iron	P886-FGF .....	Frame and Grate, Ductile Iron
P6-GDE .....	Slotted Grate, Galvanized Ductile Iron	P886-FGF-USA .....	Frame and Grate, Ductile Iron
P6-GDE-USA .....	Slotted Grate, Galvanized Ductile Iron	P886-GFG .....	Frame and Grate, Galvanized Ductile Iron
P6-GG .....	Slotted Grate, Vinylester Fiberglass	P886-GFG-USA .....	Frame and Grate, Galvanized Ductile Iron
P6-GHPD .....	Heel-Proof Slotted Grate, Galvanized Ductile Iron	P886-HDD .....	Fixed, Ductile Iron Grate
P6-GHPDE .....	Heel-Proof Slotted Grate, Galvanized Ductile Iron	P886-HR .....	Removable, Ductile Iron Frame and Grate
P6-GHPDE-USA .....	Heel-Proof Slotted Grate, Galvanized Ductile Iron	P886-PVS .....	Paver Slot Grate, Fabricated Steel
P6-GMG .....	Galvanized Mesh Screen Grate	P886-PVSG .....	Paver Slot Grate, Fabricated Galvanized Steel
P6-HPB .....	Heel-Proof Slotted Grate, Bronze	P886-PVSS .....	Paver Slot Grate, Fabricated Stainless Steel
P6-HPD .....	Heel-Proof Slotted Grate, Ductile Iron		
P6-HPDE .....	Heel-Proof Slotted Grate, Ductile Iron		
P6-HPDE-USA .....	Heel-Proof Slotted Grate, Ductile Iron		
P6-HPP .....	Heel-Proof Slotted Grate, High Density Polyethylene (HDPE)		
P6-HPS .....	Heel-Proof Slotted Grate, Stainless Steel		
P6-LD .....	Longitudinal Slotted Grate, Ductile Iron		




**P6-AWG**  
6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	1	94081	P6-AWG

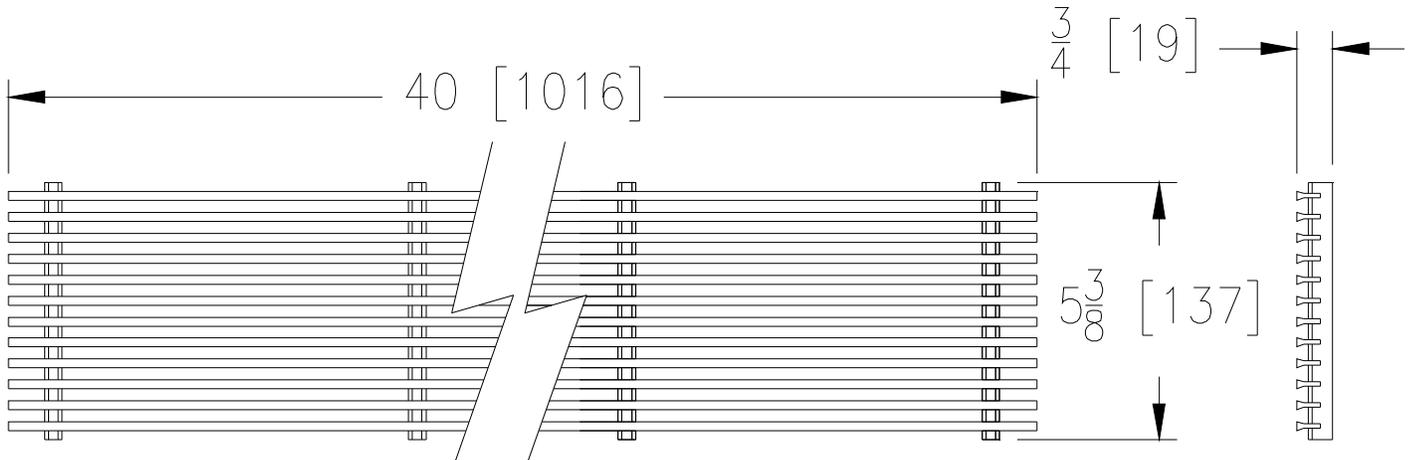

**AWG GRATE ENGINEERING SPECIFICATION: ZURN P6-AWG**

40 [1016] X 5-3/8 [137] Aluminum wire grate, weighing .9 lbs [.4 kg] per linear foot. The grate has an open area of 37.5 in<sup>2</sup> [242 cm.<sup>2</sup>] per linear foot, DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, Aluminum members conform to ASTM specification 6061 u-chips conform to ASTM specification 5052.



AWG - Wire Grate	
Material:	Aluminum
DIN Rating:	Class A
Weight:	.9 lbs/ft. [.4 kg]
Open Area:	37.5 in <sup>2</sup> /ft. [242 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-BCD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	2	64255	P6-BCD

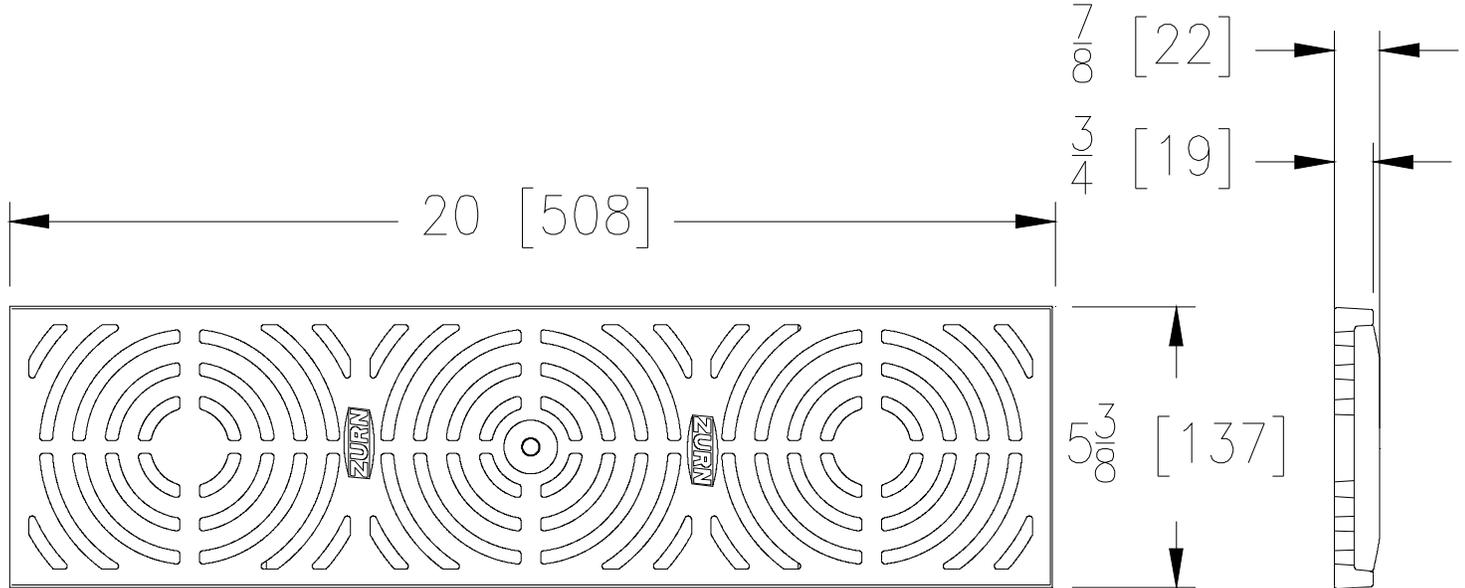

### BCD GRATE ENGINEERING SPECIFICATION: ZURN P6-BCD

20 [508] X 5-3/8 [137] Bronze circular decorative grate, weighing 7.8 lbs [3.5 kg] per linear foot. The grate has an open area of 17.6 in<sup>2</sup> [114 cm<sup>2</sup>] per linear foot. The grate conforms to DIN rating of A, ANSI rating of Light-Duty and ASTM B584 Copper Alloy NO. C844.

BCD - Circular Decorative	
Material:	Bronze
DIN Rating:	Class A
Weight:	7.8 lbs/ft. [3.5 kg]
Open Area:	17.6 in <sup>2</sup> /ft. [114 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No




**P6-BDC**  
6 {152} Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	3	94472	P6-BDC

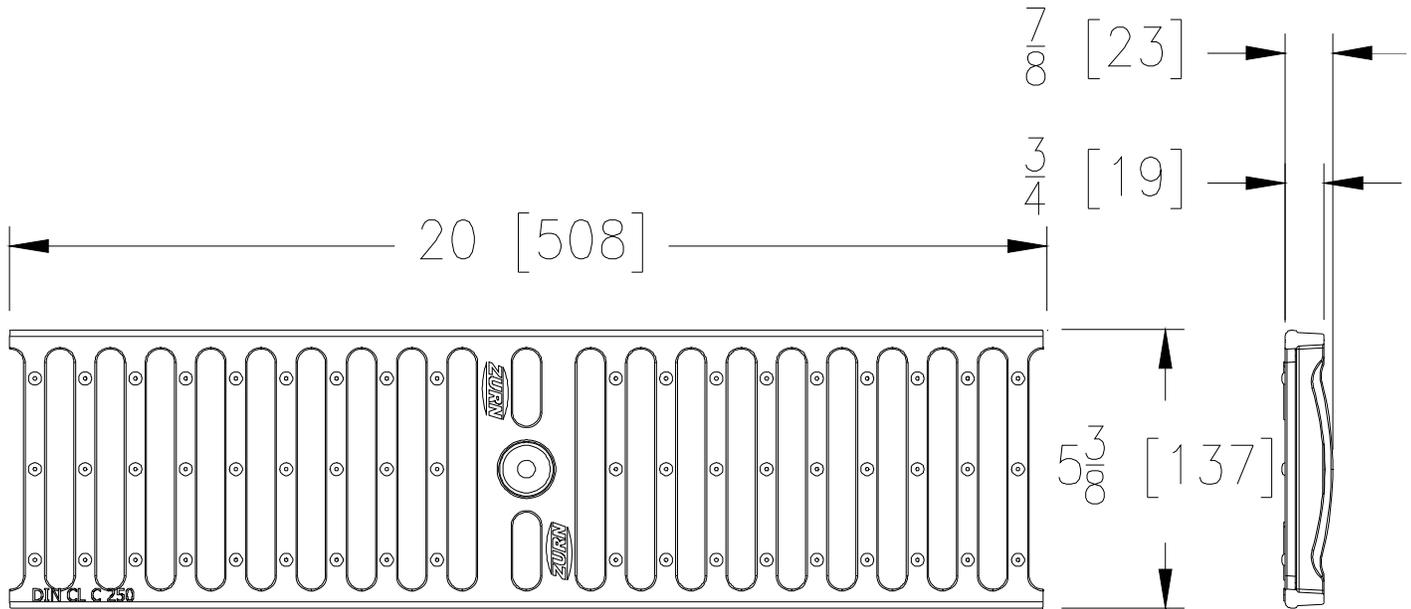

**BDC GRATE ENGINEERING SPECIFICATION: ZURN P6-BDC**

20 [508] X 5-3/8 [137] Black acid resistant epoxy coated Ductile Iron slotted grate weighing 4.5 lbs [2 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

<b>BDC -Black Acid Resistant Ductile</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [2 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	No




# P6-BDD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	4	67506	P6-BDD

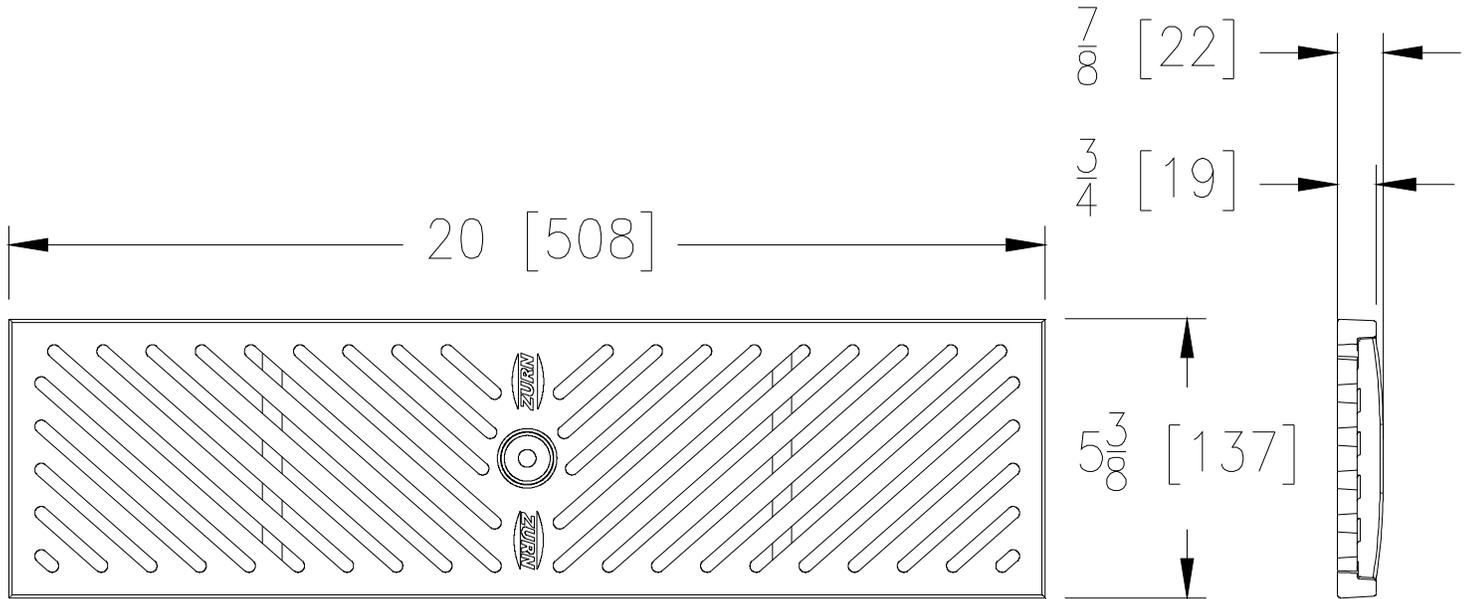

### BDD GRATE ENGINEERING SPECIFICATION: ZURN P6-BDD

20 [508] X 5-3/8 [137] Bronze diagonal decorative grate, weighing 6.9 lbs [3.1 kg] per linear foot. The grate has an open area of 17.9 in<sup>2</sup> [115 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM B584 Copper Alloy NO. C844.

<b>BDD - Diagonal Decorative</b>	
Material:	Bronze
DIN Rating:	Class A
Weight:	6.9 lbs/ft. [3.1 kg]
Open Area:	17.9 in <sup>2</sup> /ft. [115 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-BDE**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	5	94473	P6-BDE

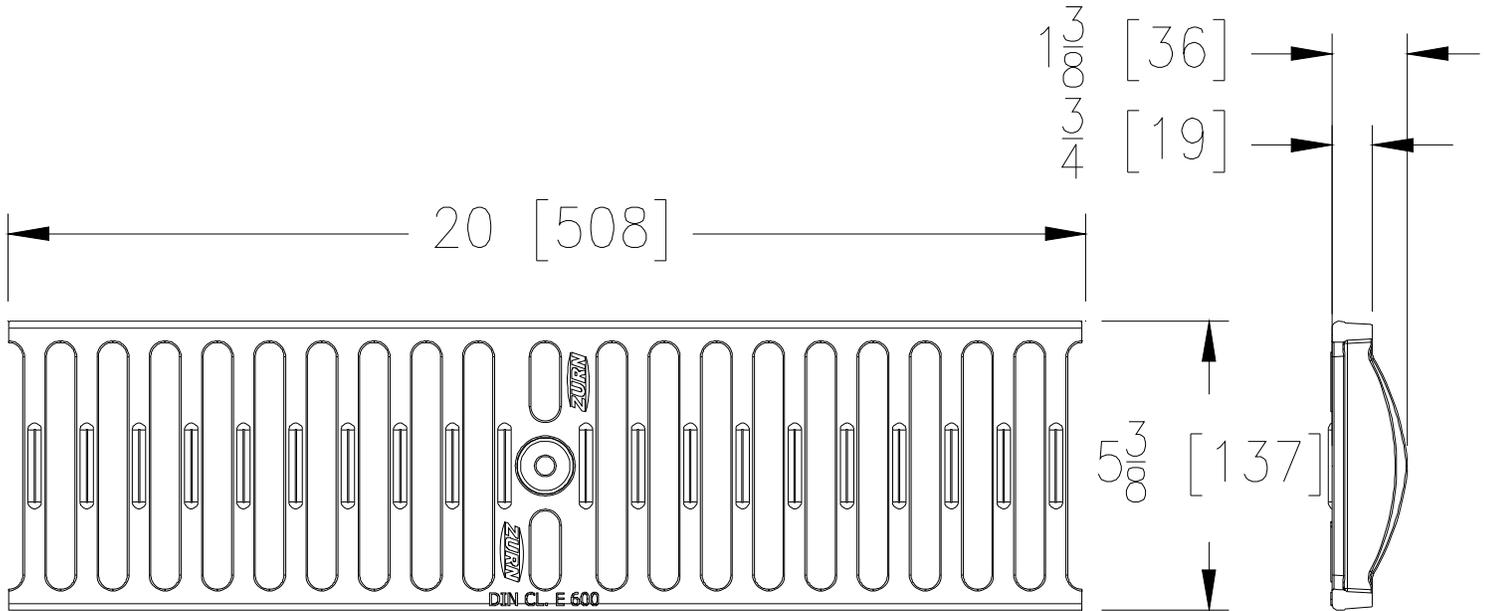

**BDE GRATE ENGINEERING SPECIFICATION: ZURN P6-BDE**

20 [508] X 5-3/8 [137] Black acid resistant epoxy coated Ductile Iron slotted grate weighing 6.4 lbs [2.9 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 load rated, FAA load rated and ASTM A536 Grade 80-55-06.

<b>BDE -Black Acid Resistant Ductile</b>	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [2.9 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-BDE-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	6	94473	P6-BDE-USA

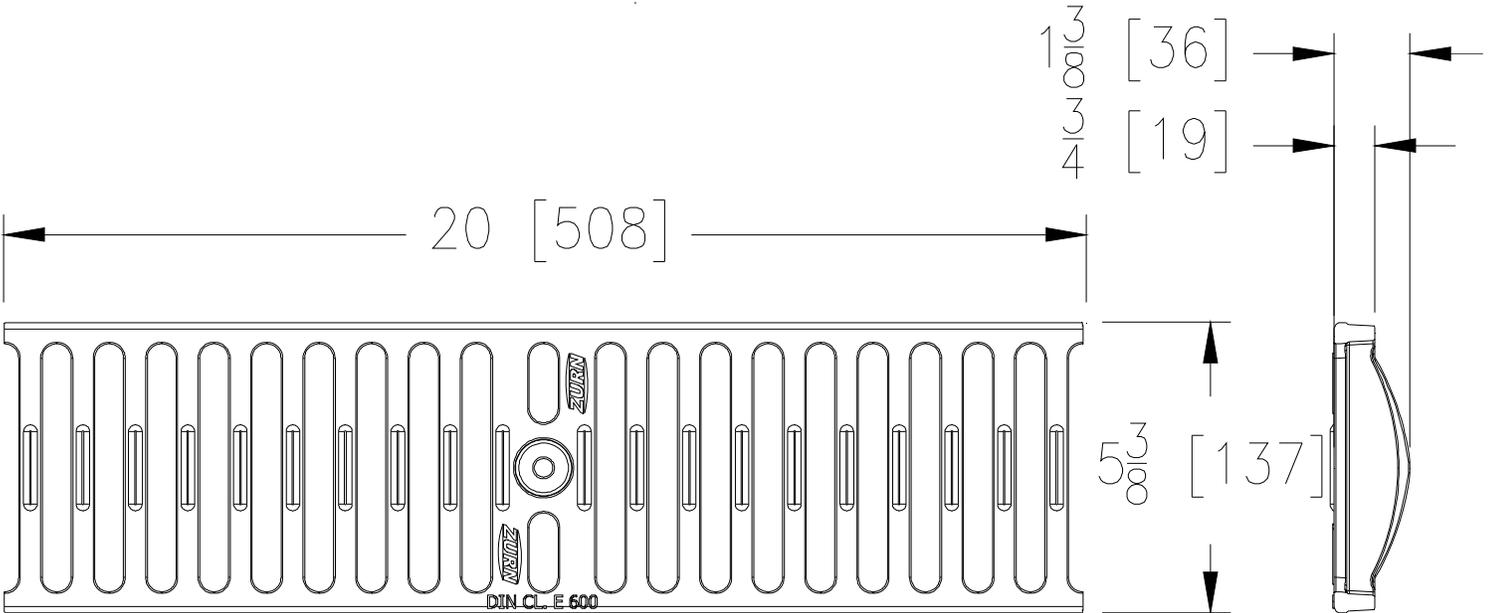

### BDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-BDE-USA

20 [508] X 5-3/8 [137] Black acid resistant epoxy coated Ductile Iron slotted grate weighing 6.4 lbs [2.9 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 load rated, FAA load rated and ASTM A536 Grade 80-55-06.

BDE-USA -Black Acid Resistant	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [2.9 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes






**P6-BG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	7	61025	P6-BG

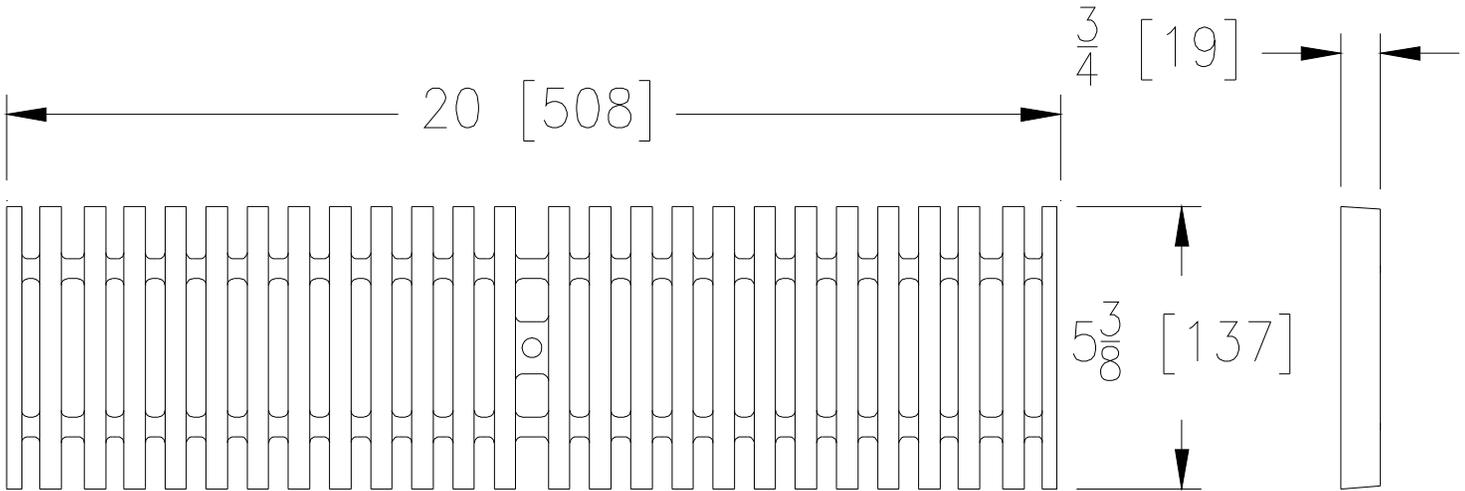

**BG GRATE ENGINEERING SPECIFICATION:** The Zurn P6-BG

20 [508] X 5-3/8 [137] Galvanized ductile Iron slotted bar grate weighing 5.7 lbs [2.6 kg] per linear foot. The grate has an open area of 23.9 in<sup>2</sup> [154 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated, ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>BG - Slotted Bar Grate</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	5.7 lbs/ft. [2.6 kg]
Open Area:	23.9 in <sup>2</sup> /ft. [154 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	19/64 [7.5]
ADA:	No
H-20:	Yes
FAA:	No




# P6-BZ

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	8	64054	P6-BZ

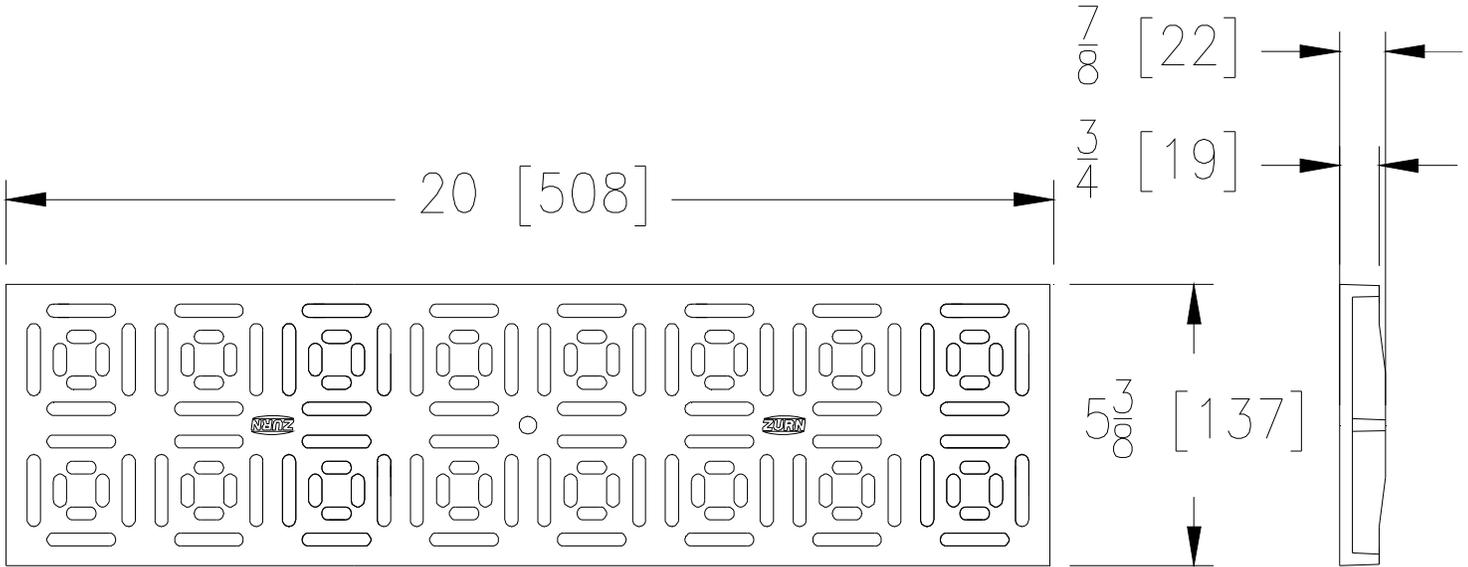

### BZ GRATE ENGINEERING SPECIFICATION: ZURN P6-BZ

20 [508] X 5-3/8 [137] Bronze decorative grate weighing 6.2 lbs [2.8 kg] per linear foot. The grate has an open area of 16.9 in<sup>2</sup> [109 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ASTM B584 Copper Alloy NO. C844.

BZ - Bronze Decorative	
Material:	Bronze
DIN Rating:	Class A
Weight:	6.2 lbs/ft. [2.8 kg]
Open Area:	16.9 in <sup>2</sup> /ft. [109 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No






**P6-DBG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	9	61025	P6-DBG

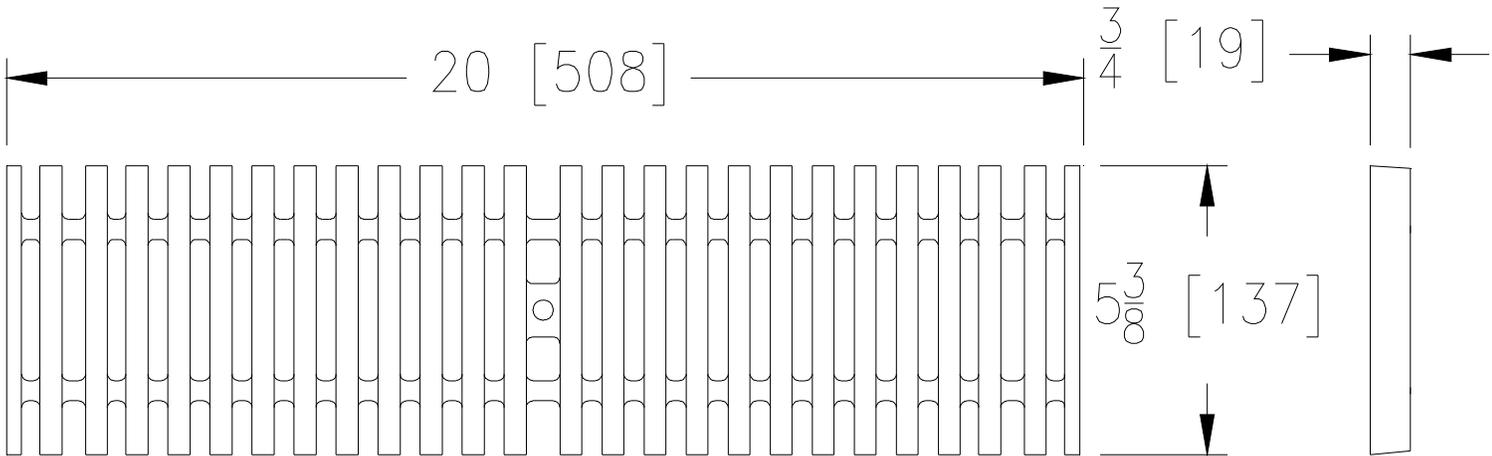

**DBG GRATE ENGINEERING SPECIFICATION: ZURN P6-DBG**

20 [508] X 5-3/8 [137] Ductile Iron slotted bar Dura-coated grate weighing 5.7 lbs [2.6 kg] per linear foot. The grate has an open area of 23.9 in<sup>2</sup> [154 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

DBG - Dura-Coated Bar Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	5.7 lbs/ft. [2.6 kg]
Open Area:	23.9 in <sup>2</sup> /ft. [154 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	19/64 [7.5]
ADA:	No
H-20:	Yes
FAA:	No




**P6-DC**  
**6 [152] Wide Cover**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	10	56780	P6-DC

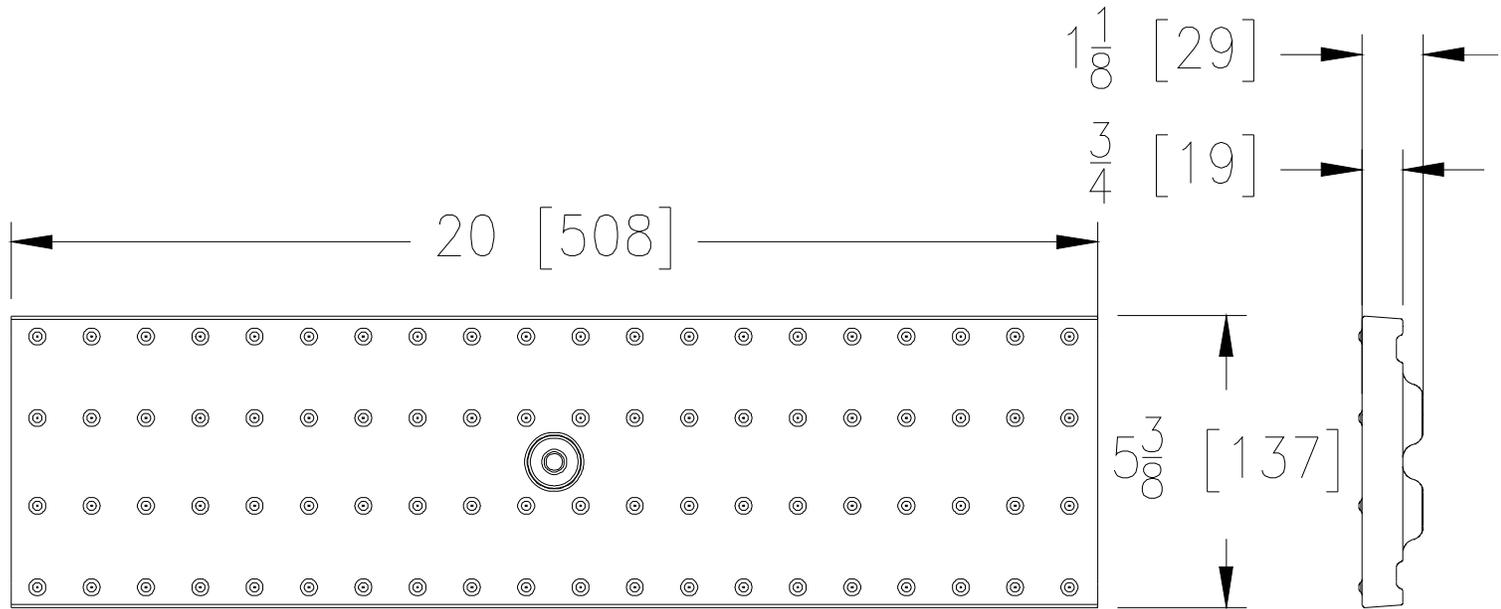

**DC GRATE ENGINEERING SPECIFICATION: ZURN P6-DC**

20 [508] X 5-3/8 [137] Ductile Iron Dura-coated solid cover weighing 8 lbs [3.6 kg]. Grate conforms to DIN Rating of C, ANSI rating of Heavy-Duty, H-20 Load Rated, ADA compliant, and ASTM A536 Grade 80-55-06.

<b>DC - Solid Cover</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	8 lbs/ft. [3.6 kg]
Open Area:	N/A
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	Yes
FAA:	No




**P6-DCD**  
**6 [152] Wide Decorative Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	11	64255	P6-DCD

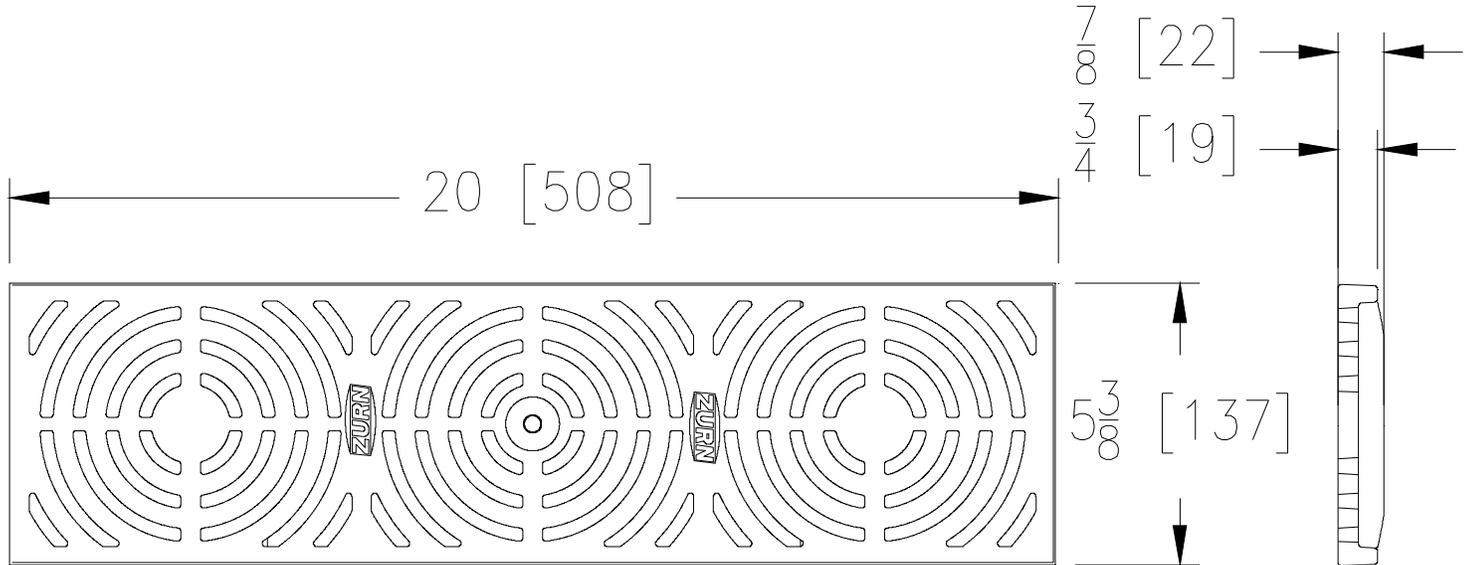

**DCD GRATE ENGINEERING SPECIFICATION: ZURN P6-DCD**

20 [508] X 5-3/8 [137] Ductile Iron circular decorative grate, weighing 6.3 lbs [2.9 kg] per linear foot. The grate has an open area of 17.6 in<sup>2</sup> [114 cm<sup>2</sup>] per linear foot, DIN rating of C, ANSI rating of Heavy-Duty and ASTM A536 Grade 80-55-06.

<b>DCD - Circular Decorative</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	6.3 lbs/ft. [2.9 kg]
Open Area:	17.6 in <sup>2</sup> /ft. [114 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No




# P6-DCE-USA

## 6 [152] Wide Domestic Cover

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	12	84474	P6-DCE-USA

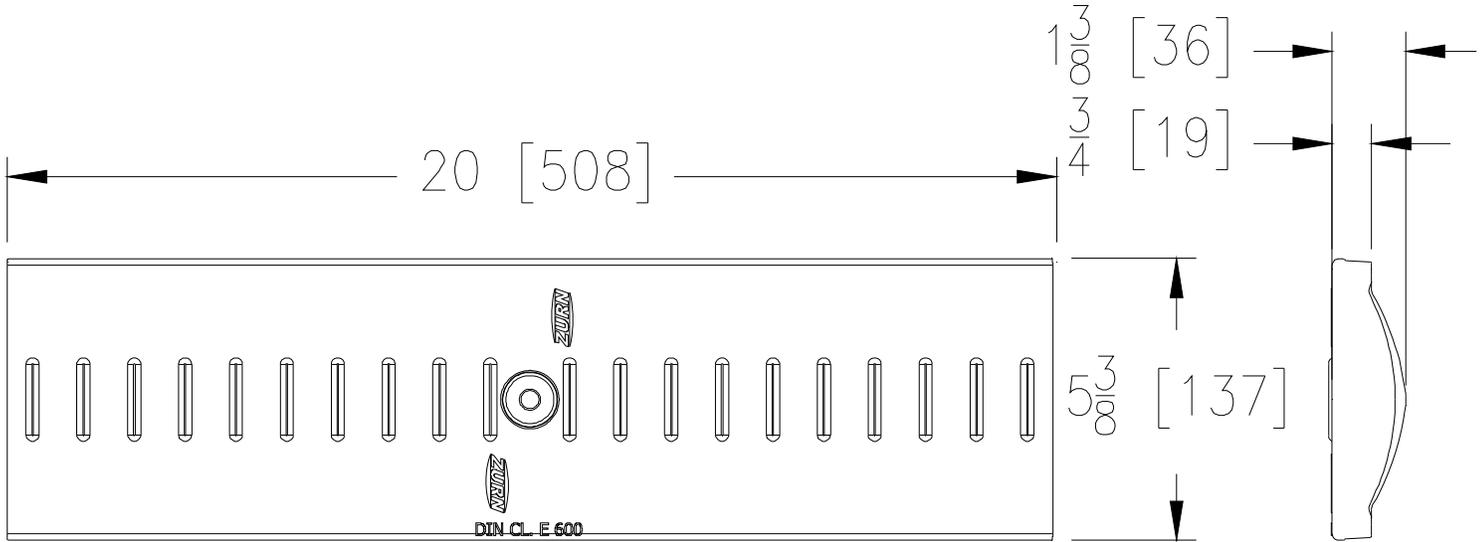

### DCE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-DCE-USA

20 [508] X 5-3/8 [137] Ductile Iron Dura-coated solid cover , weighing 8.0 lbs [3.6 kg] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, is H-20 & FAA load rated, ADA compliant and ASTM A536 Grade 80-55-06.

DCE-USA - Solid Cover	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	8.0 lbs/ft. [3.6 kg]
Open Area:	N/A
ANSI Rating:	Special Duty
Application:	Dynamic Loads
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	Yes
FAA:	Yes






**P6-DDD**  
**6 [152] Wide Decorative Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	13	67506	P6-DDD

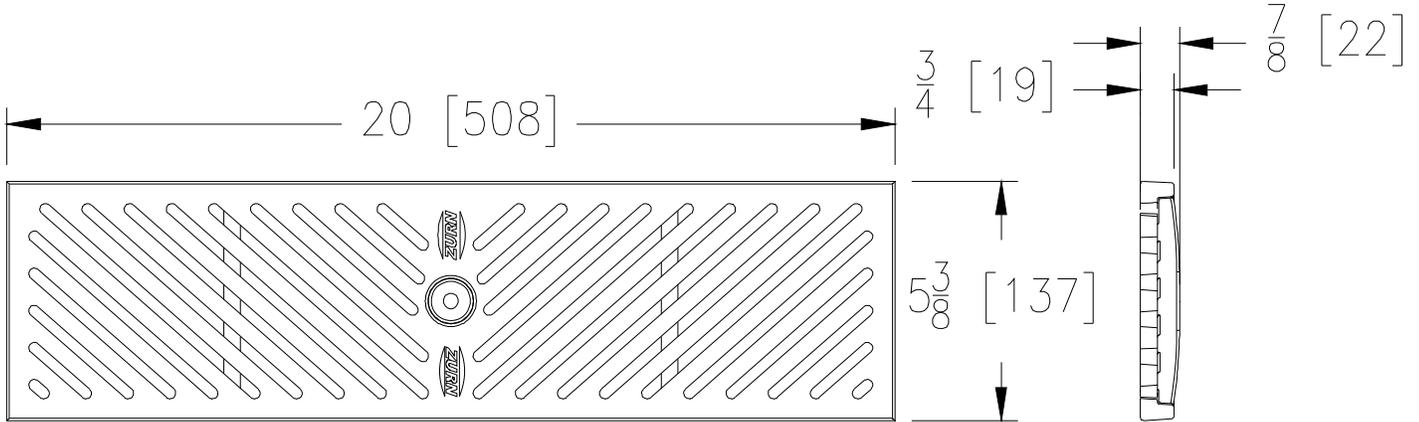

**DDD GRATE ENGINEERING SPECIFICATION: ZURN P6-DDD**

20 [508] X 5-3/8 [137] Ductile Iron diagonal decorative grate, weighing 5.5 lbs [2.5 kg] per linear foot. The grate has an open area of 17.9 in<sup>2</sup> [115 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM A536 Grade 80-55-06.

<b>DDD - Diagonal Decorative</b>	
Material:	Ductile Iron
DIN Rating:	Class A
Weight:	5.5 lbs/ft. [2.5 kg]
Open Area:	17.9 in <sup>2</sup> /ft. 115 cm <sup>2</sup>
ANSI Rating:	Light-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-DGC**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	14	94472	P6-DGC

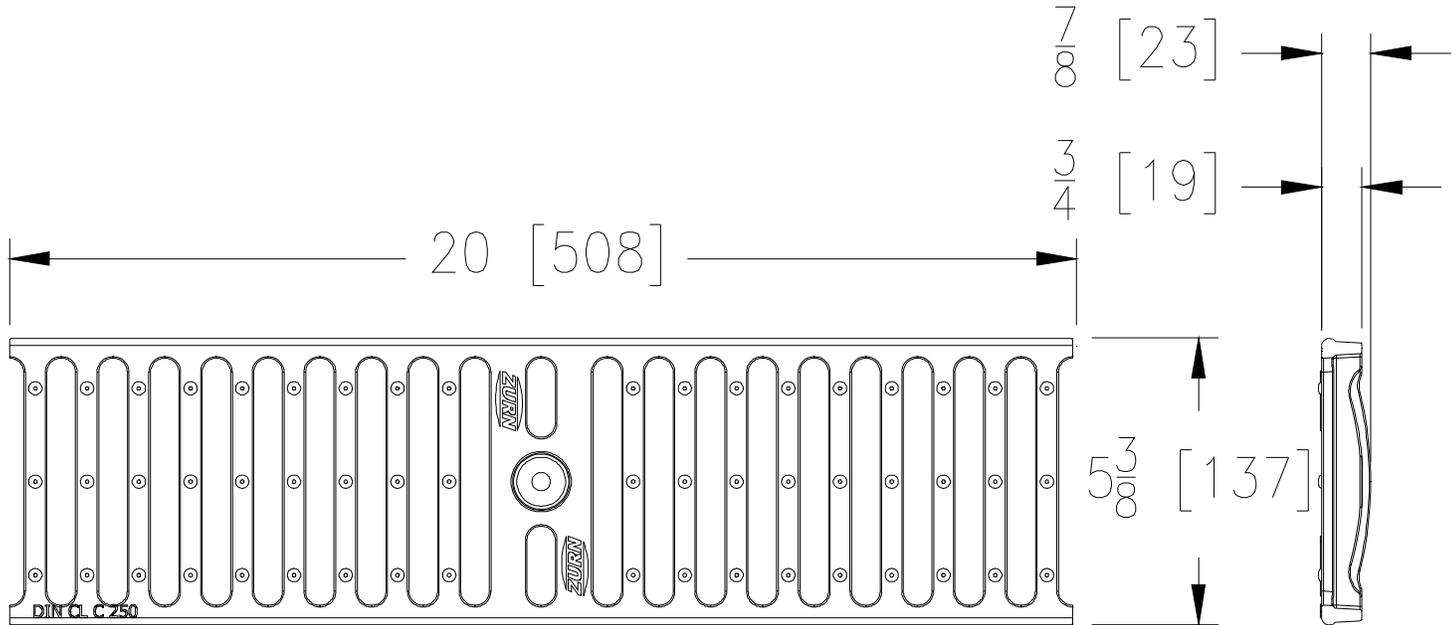

**DGC GRATE ENGINEERING SPECIFICATION: ZURN P6-DGC**

20 [508] X 5-3/8 [137] Ductile Iron slotted grate weighing 4.5 lbs [2 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot, DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

<b>DGC - Slotted Grate</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [2 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	No




# P6-DGC-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	15	94472	P6-DGC-USA

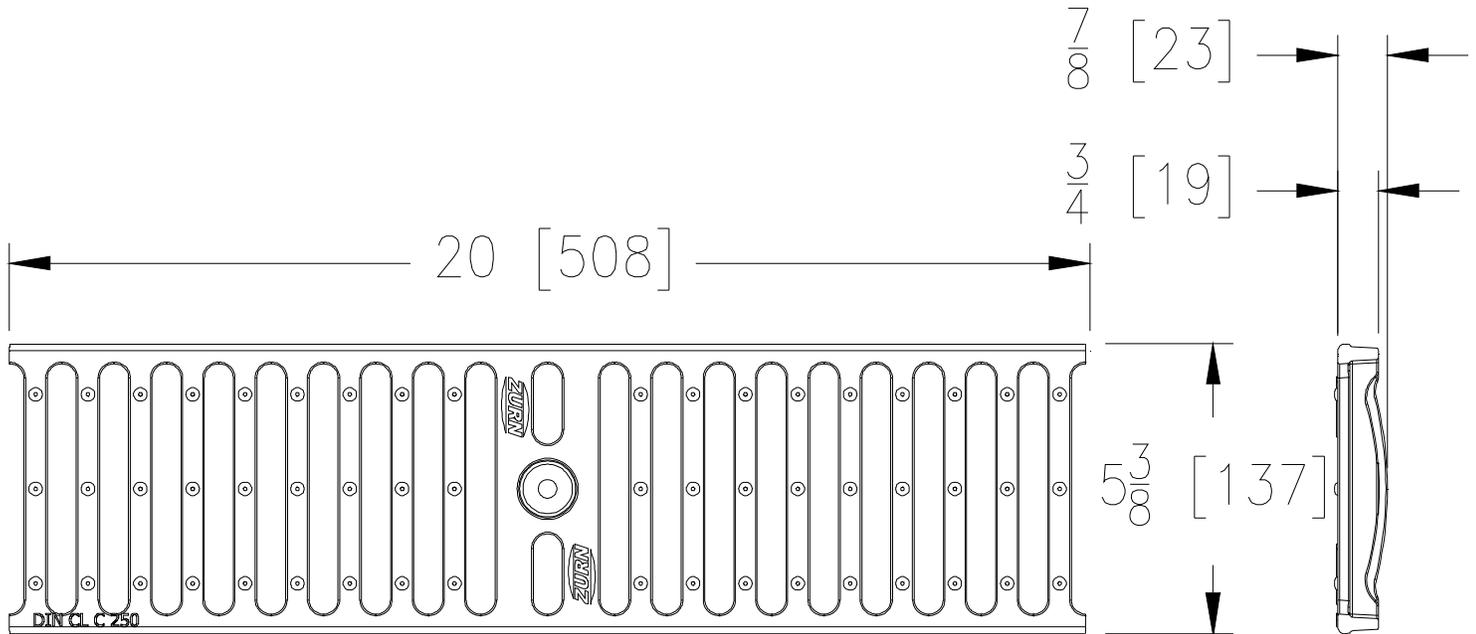

### DGC-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-DGC-USA

20 [508] X 5-3/8 [137] Ductile Iron slotted grate weighing 4.5 lbs [2 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06.

DGC-USA - Slotted Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [2 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	No






**P6-DGE**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	16	94473	P6-DGE

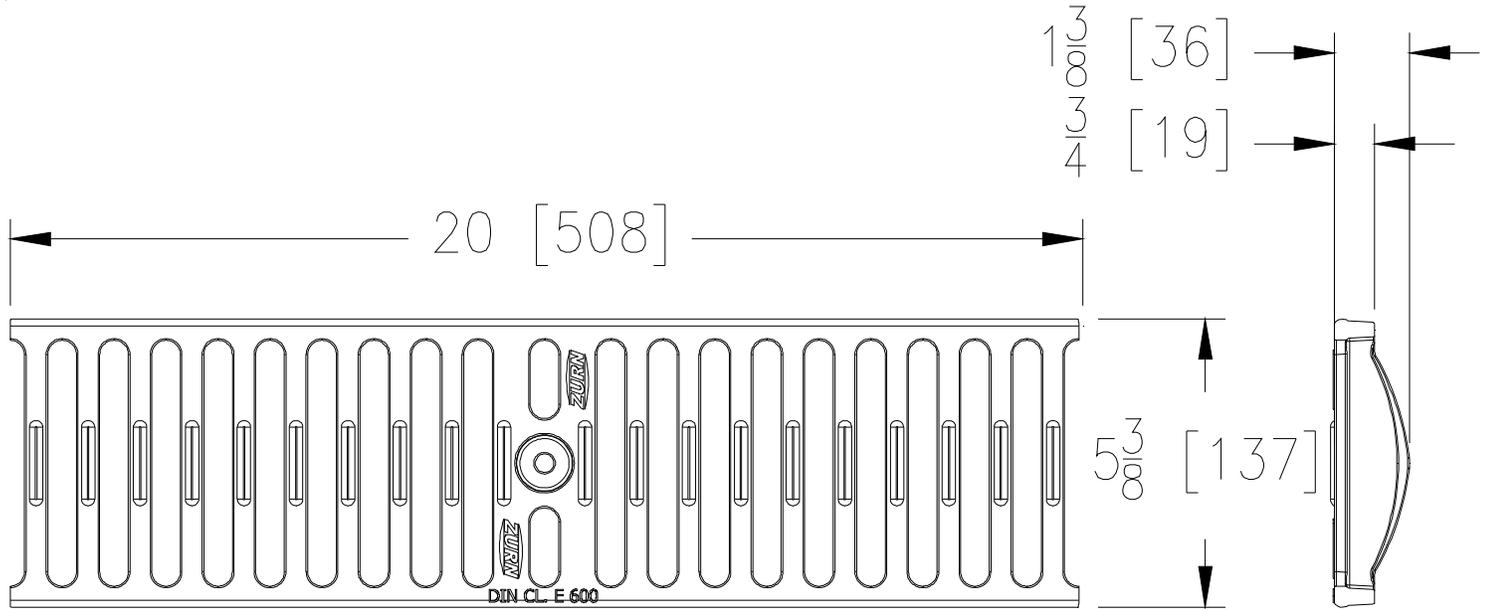

**DGE GRATE ENGINEERING SPECIFICATION:** The Zurn P6-DGE

20 [508] X 5-3/8 [137] Ductile Iron slotted grate weighing 6.4 lbs [3 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 load rated, FAA load rated and ASTM A536 Grade 80-55-06.

<b>DGE - Slotted Grate</b>	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [3 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-DGE-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	17	94473	P6-DGE-USA

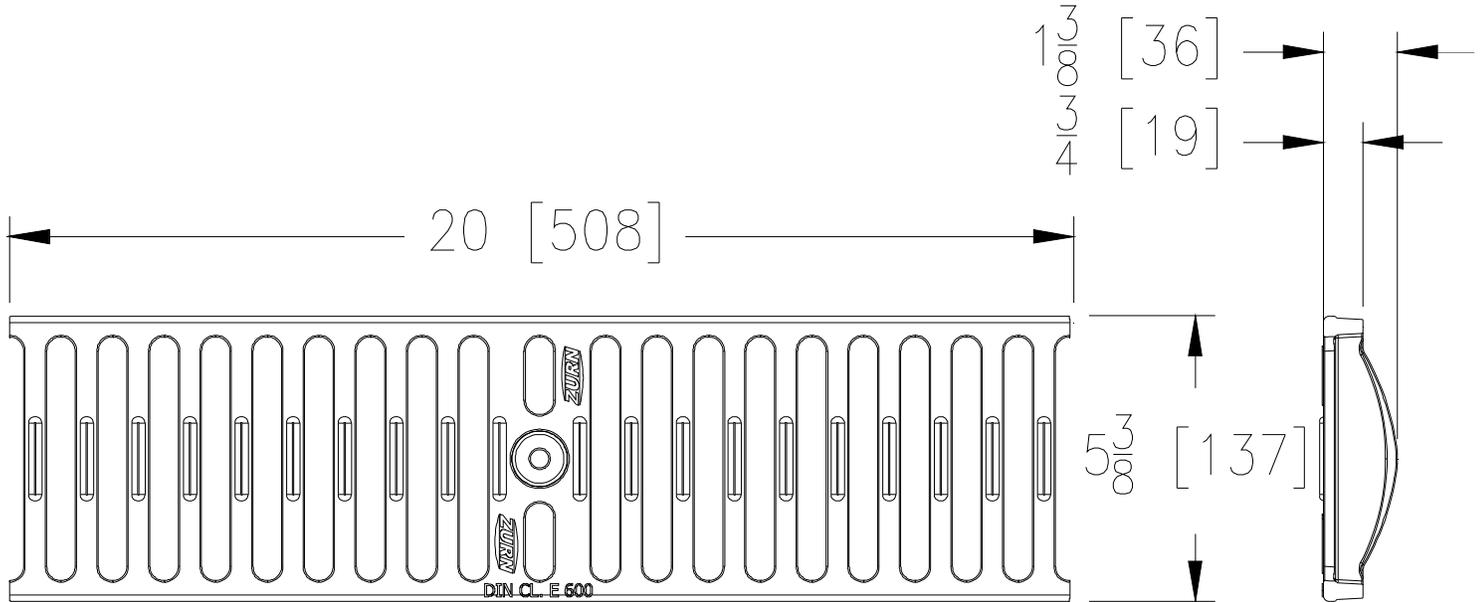

### DGE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-DGE-USA

20 [508] X 5-3/8 [137] Ductile Iron slotted grate weighing 6.4 lbs [2.9 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated. Grate conforms to ASTM A536 Grade 80-55-06



DGE-USA - Slotted Grate	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [2.9 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes




# P6-DOG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	18	64054	P6-DOG

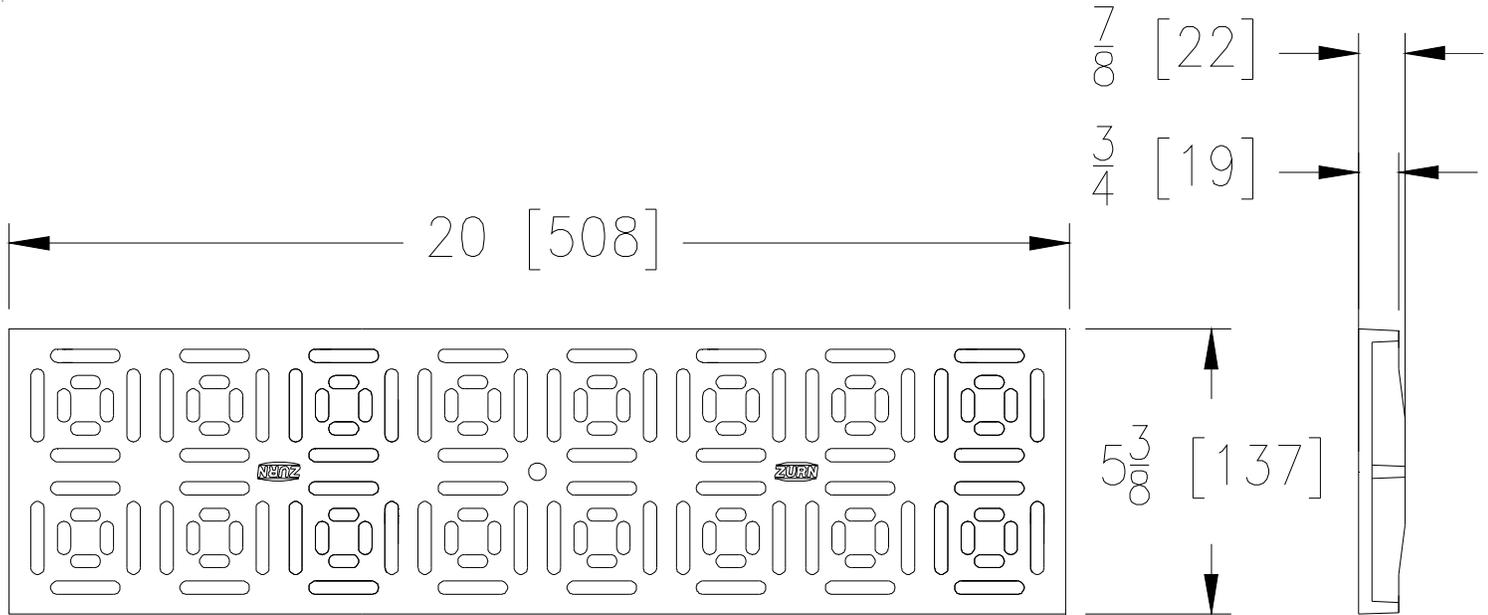

### DOG GRATE ENGINEERING SPECIFICATION: ZURN P6-DOG

20 [508] X 5-3/8 [137] Ductile Iron ornamental grate weighing 4.9 lbs [2.2 kg] per linear foot. The grate has an open area of 16.9 in<sup>2</sup> [109 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty and ASTM A536 Grade 80-55-06.

DOG - Ornamental Grate	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	4.9 lbs/ft. [2.2 kg]
Open Area:	16.9 in <sup>2</sup> /ft. [109 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No




# P6-DTW

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	19	94069	P6-DTW

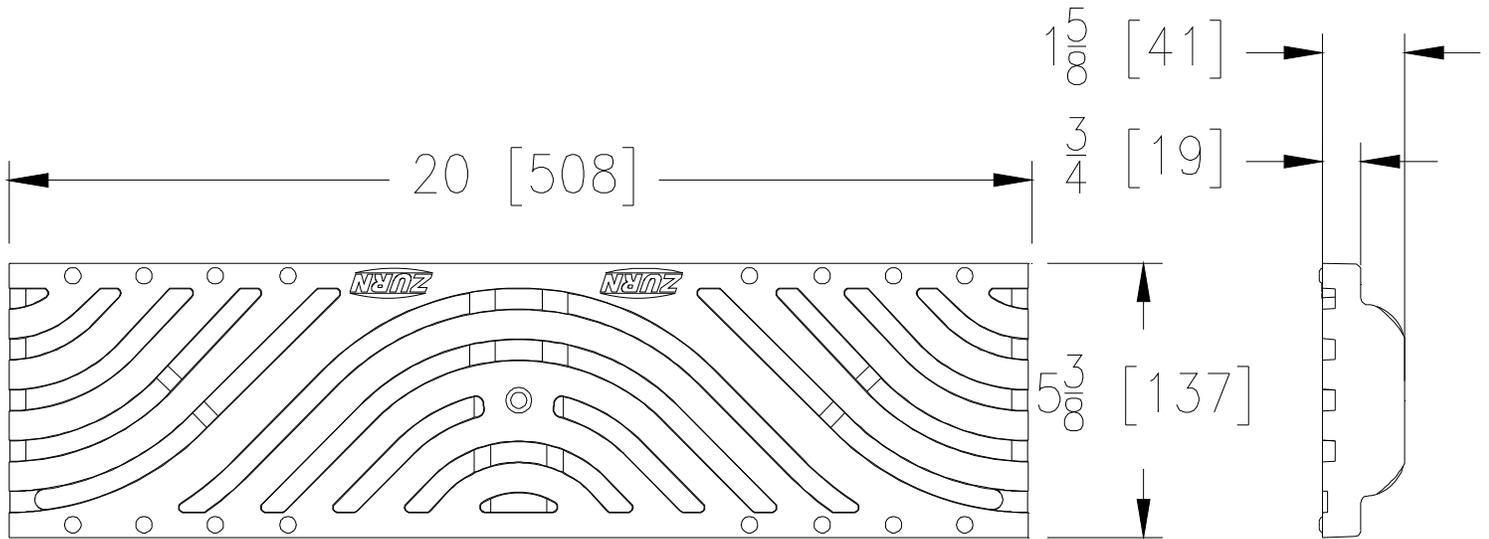

### DTW GRATE ENGINEERING SPECIFICATION: ZURN P6-DTW

20 [508] X 5-3/8 [137] Ductile Iron decorative tidal wave grate weighing 8.1 lbs [per linear foot. The grate has an open area of 21.0 in<sup>2</sup> [135 cm<sup>2</sup>] per linear foot. Grate conforms to DIN Rating of C, ANSI Rating of Heavy-Duty, H20 load rated and ASTM A536 Grade 80-55-06.

DTW - Decorative Tidal Wave	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	8.1 lbs/ft. [3.7 kg]
Open Area:	21.0 in <sup>2</sup> /ft. [135 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Decorative
Slot Width/Hole Size:	13/32 [10]
ADA:	No
H-20:	Yes
FAA:	No




# P6-DWV

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	20	64450	P6-DWV

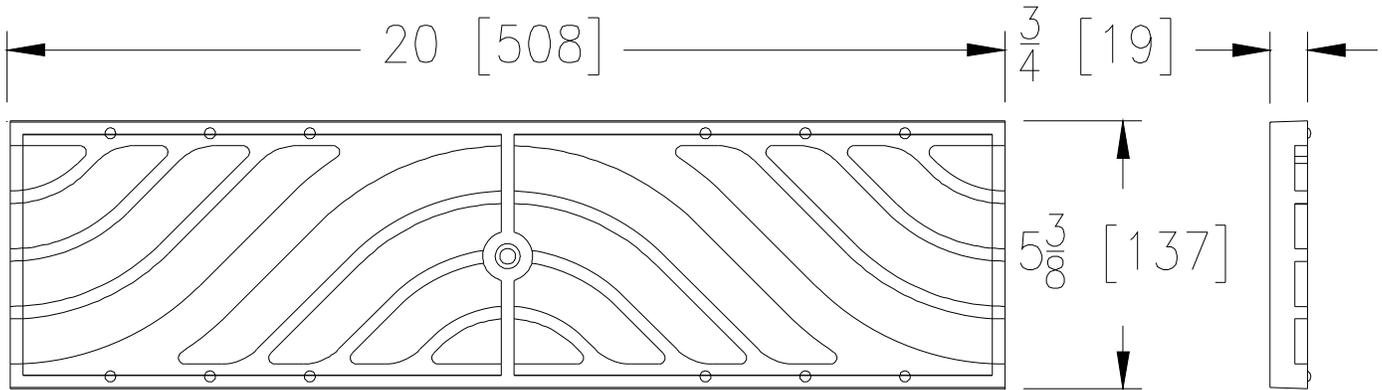

### DWV GRATE ENGINEERING SPECIFICATION: ZURN P6-DWV

20 [508] X 5-3/8 [137] Ductile Iron decorative wave grate weighing 4.2 lbs [1.9 kg] per linear foot. The grate has an open area of 36.9 in<sup>2</sup> [238 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ASTM A536 Grade 80-55-06.

DWV - Decorative Wave	
Material:	Ductile Iron
DIN Rating:	Class A
Weight:	4.2 lbs/ft. [1.9 kg]
Open Area:	36.9 in <sup>2</sup> /ft. [238 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Decorative
Slot Width/Hole Size:	29/32 [23]
ADA:	No
H-20:	No
FAA:	No




**P6-FG**  
6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	21	64063	P6-FG

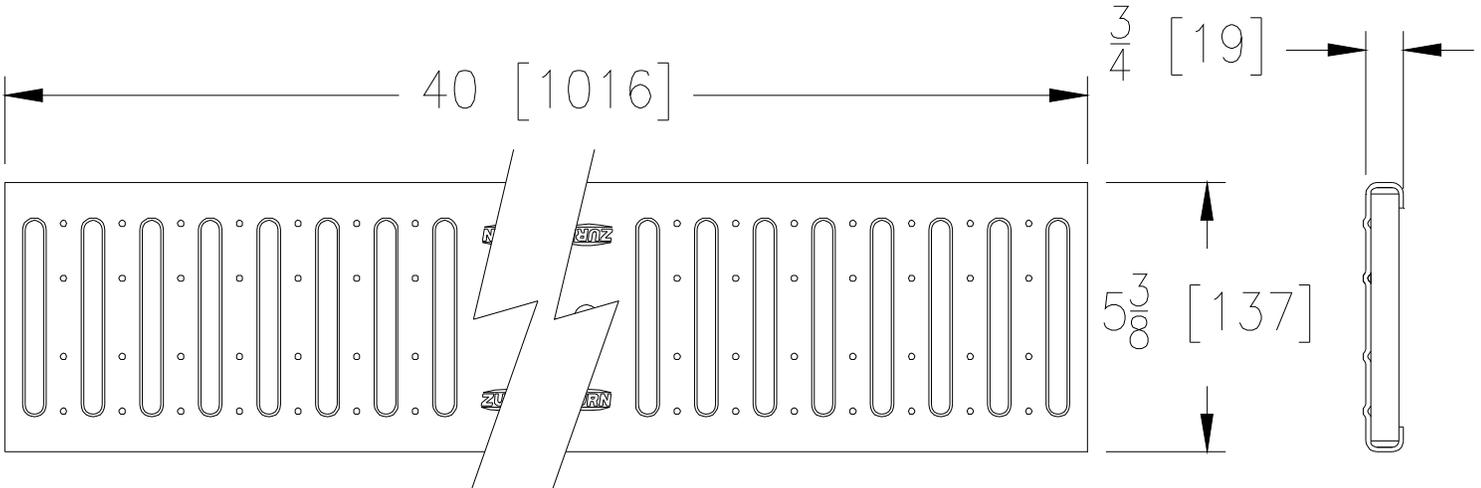

**FG GRATE ENGINEERING SPECIFICATION: ZURN P6-FG**

40 [1016] X 5-3/8 [137] Galvanized steel fabricated slotted grate weighing 1.7 lbs [.8 kg] per linear foot. The grate has an open area of 12.0 in<sup>2</sup> [77 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty. Galvanized skin conforms to ASTM A1011 or ASME A1008, Galvanizing conforms to ASTM A653, Galvanized Coating designation G60, and minimum spangle.

<b>FG - Fabricated Slotted</b>	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.7 lbs/ft. [.8 kg]
Open Area:	12.0 in <sup>2</sup> /ft. [77 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Pedestrian Traffic
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	No
FAA:	No






**P6-FS**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	22	64063	P6-FS

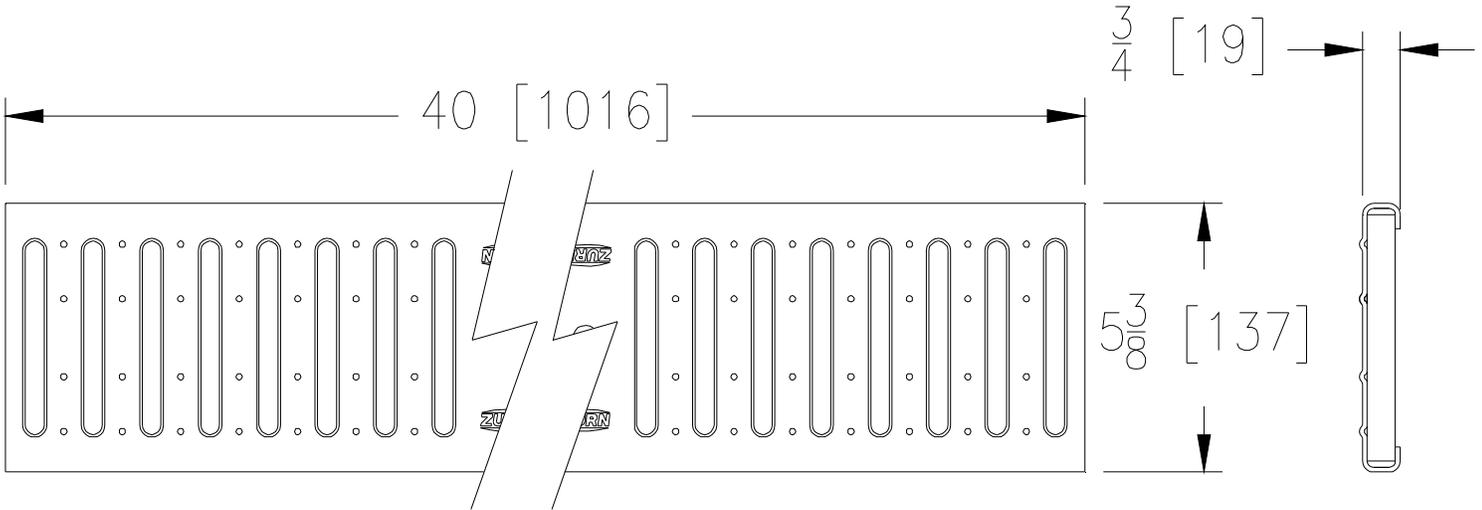

**FS GRATE ENGINEERING SPECIFICATION: ZURN P6-FS**

40 [1016] X 5-3/8 [137] Galvanized steel fabricated slotted grate weighing 1.7 lbs [.8 kg] per linear foot. The grate has an open area of 12.0 in<sup>2</sup> [77 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ASTM A-240 TYPE 304 (316 by request).

<b>FS - Slotted</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.7 lbs/ft. [.8 kg]
Open Area:	12.0 in <sup>2</sup> /ft. [77 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Pedestrian Traffic
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	No
FAA:	No






**P6-GDC**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	23	94472	P6-GDC

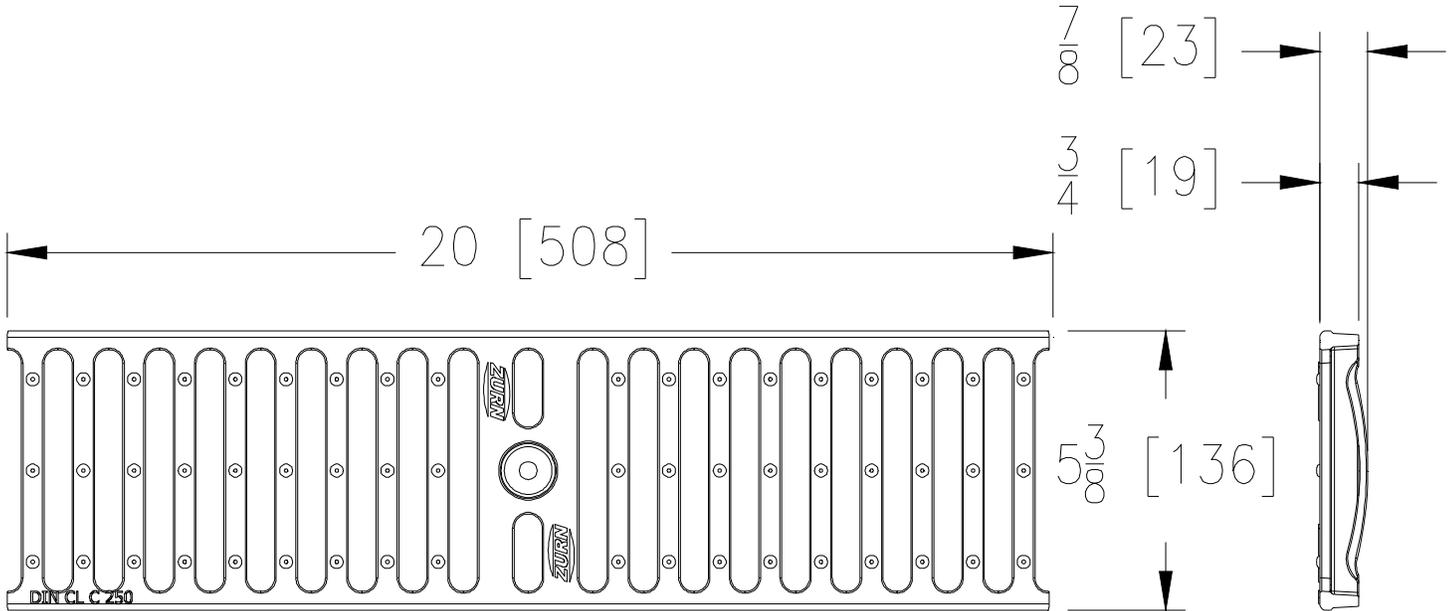

**GDC GRATE ENGINEERING SPECIFICATION: ZURN P6-GDC**

20 [508] X 5-3/8 [137] Galvanized ductile Iron slotted grate weighing 4.5 lbs [2 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rating, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

GDC - Slotted Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [2 kg]
Open Area:	28.1 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	No




# P6-GDC-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	24	94472	P6-GDC-USA

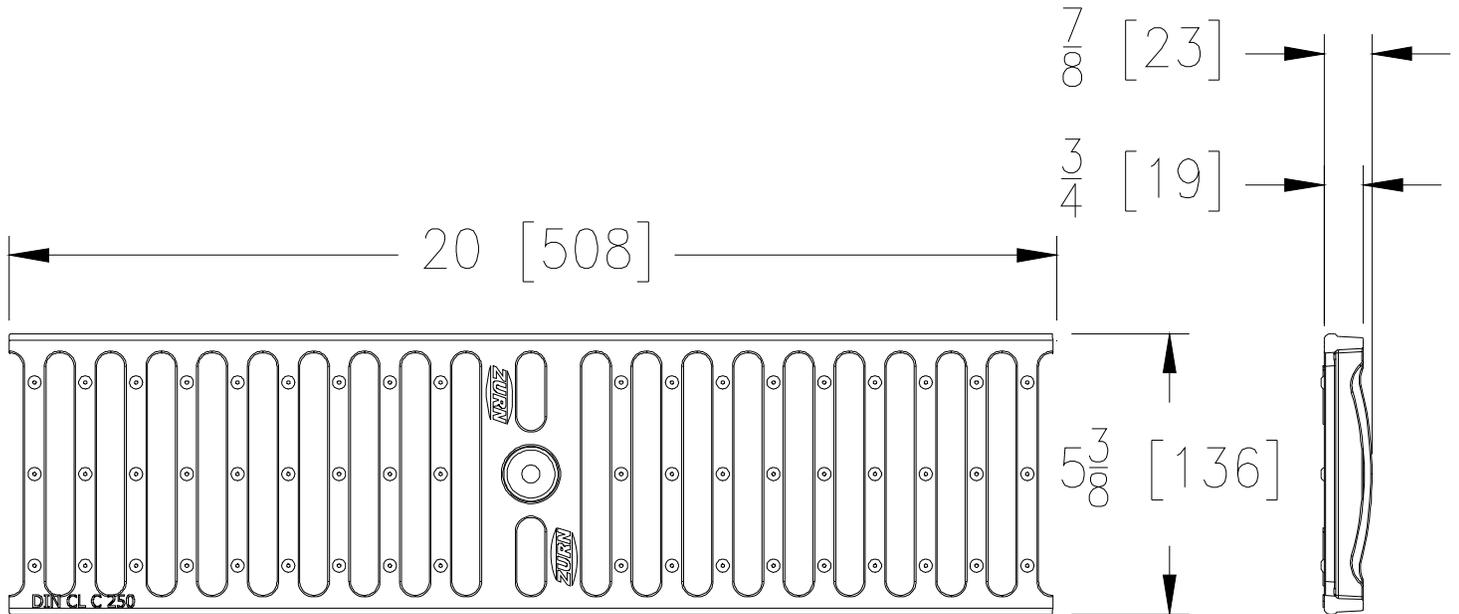

### GDC-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-GDC-USA

20 [508] X 5-3/8 [137] Galvanized ductile Iron slotted grate weighing 4.5 lbs [2 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

GDC-USA - Slotted Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.5 lbs/ft. [2 kg]
Open Area:	28.1 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Vehicle Traffic
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	No






**P6-GDE**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	25	94473	P6-GDE

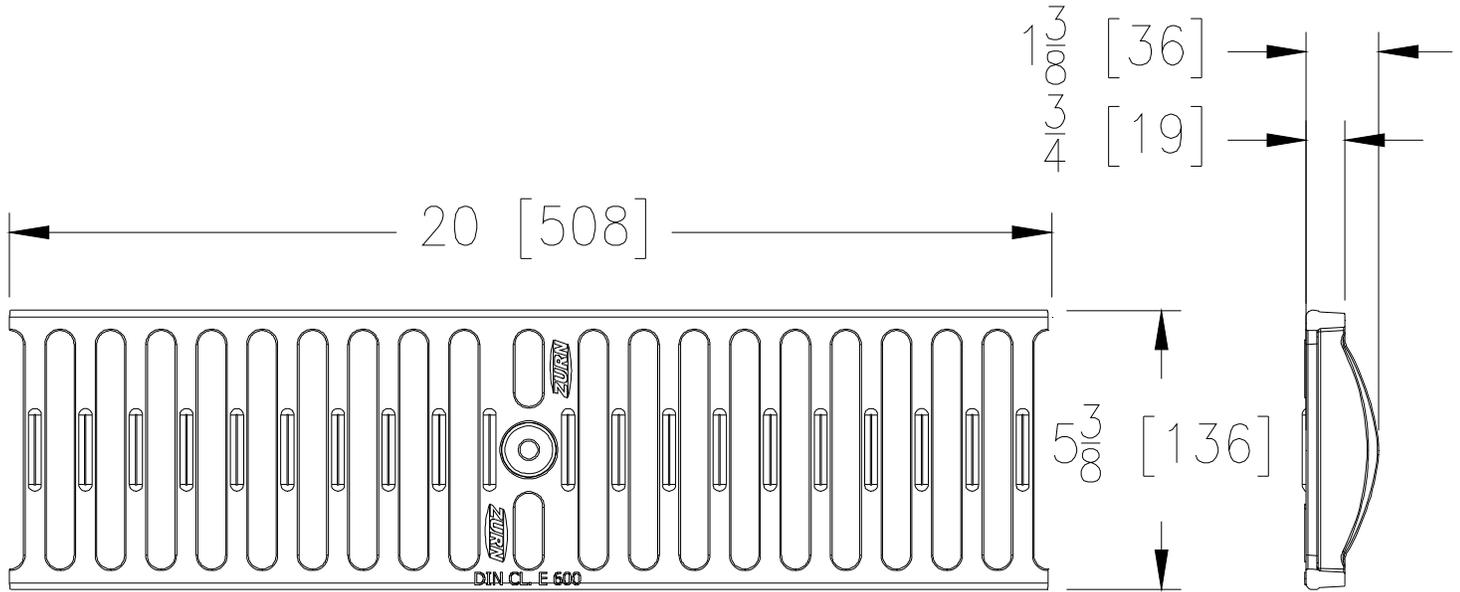

**GDE GRATE ENGINEERING SPECIFICATION: ZURN P6-GDE**

20 [508] X 5-3/8 [137] Galvanized ductile Iron slotted grate weighing 6.4 lbs [2.9 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>GDE - Slotted Grate</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [2.9 kg]
Open Area:	28.2 in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes




**P6-GDE-USA**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	26	94473	P6-GDE-USA

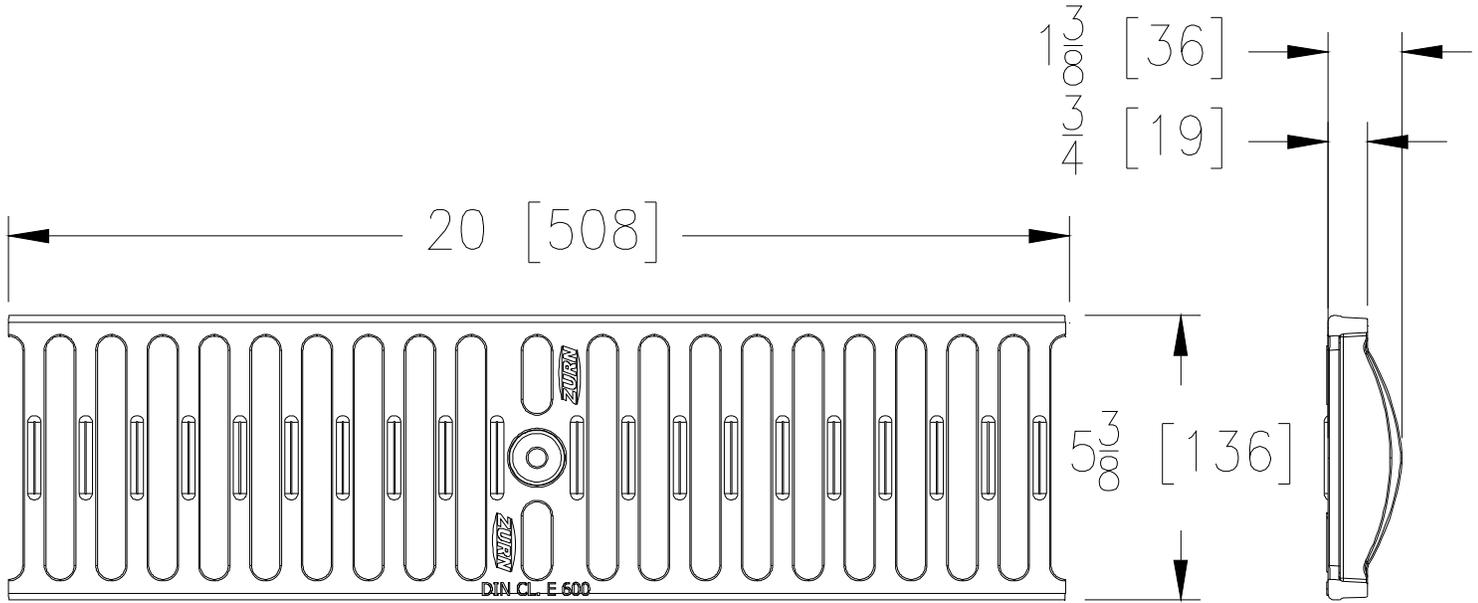

**GDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-GDE-USA**

20 [508] X 5-3/8 [137] Galvanized ductile Iron slotted grate weighing 6.4 lbs [2.9 kg] per linear foot. The grate has an open area of 28.2 in<sup>2</sup> [181 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>GDE-USA - Slotted Grate</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	6.4 lbs/ft. [2.9 kg]
Open Area:	28.2/ in <sup>2</sup> /ft. [181 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes






**P6-GG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	27	56995	P6-GG

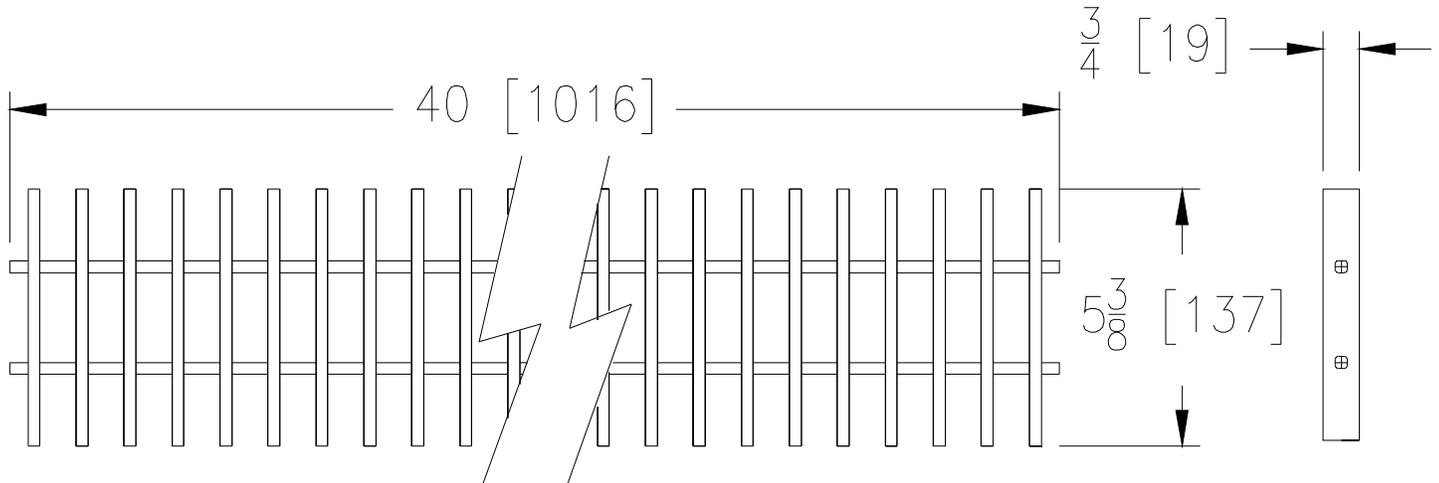

**GG GRATE ENGINEERING SPECIFICATION: ZURN P6-GG**

40 [1016] X 5-3/8 [137] Vinylester fiberglass slotted grate weighing .98 lbs [.44 kg] per linear foot. The grate has an open area of 41.6 in<sup>2</sup> [268 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, slip resistant surface and interplastic CORVE8300, or Reichhold DION or equivalent.

<b>GG - Vinylester Fiberglass Slotted Grate</b>	
Material:	Vinylester Fiberglass
DIN Rating:	Class A
Weight:	.98 lbs/ft. [.44 kg]
Open Area:	41.6 in <sup>2</sup> /ft. [268 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Chemical App. Pedestrian
Slot Width/Hole Size:	3/4 [19]
ADA:	No
H-20:	No
FAA:	No




# P6-GHPD

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	28	58524	P6-GHPD

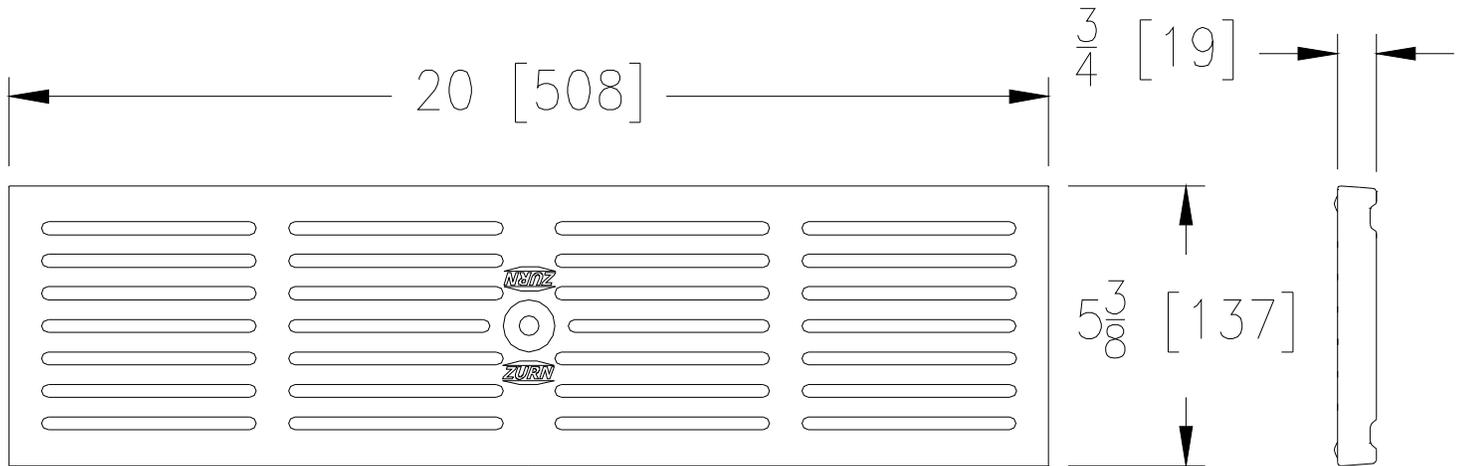

### GHPD GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPD

20 [508] X 5-3/8 [137] Galvanized ductile Iron heel-proof slotted grate weighing 6.3 lbs [2.9 kg] per linear foot. The grate has an open area of 17.0 in<sup>2</sup> [110 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

GHPD - Heel-Proof Slotted	
Material:	Galvanized Ductile Iron
DIN Rating:	Class B
Weight:	6.3 lbs/ft. [2.9 kg]
Open Area:	17.0 in <sup>2</sup> /ft. [110 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-GHPDE**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	29	94454	P6-GHPDE

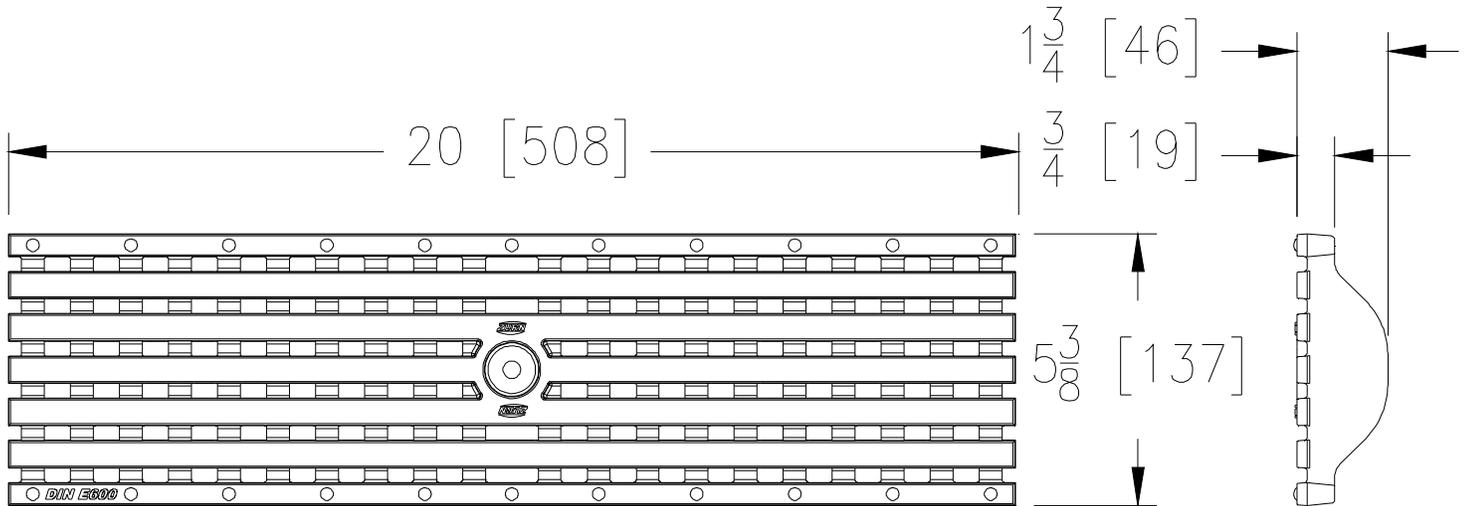

**GHPDE GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPDE**

20 [508] X 5-3/8 [137] Galvanized ductile Iron heel-proof slotted grate weighing 9.5 lbs [4.3 kg] per linear foot. The grate has an open area of 11.1 in<sup>2</sup> [71.6cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

<b>GHPDE - Heel-Proof Slotted</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	9.5 lbs/ft. [4.3 kg]
Open Area:	11.1 in <sup>2</sup> /ft. [71.6 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-GHPDE-USA

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	30	94454	P6-GHPDE-USA

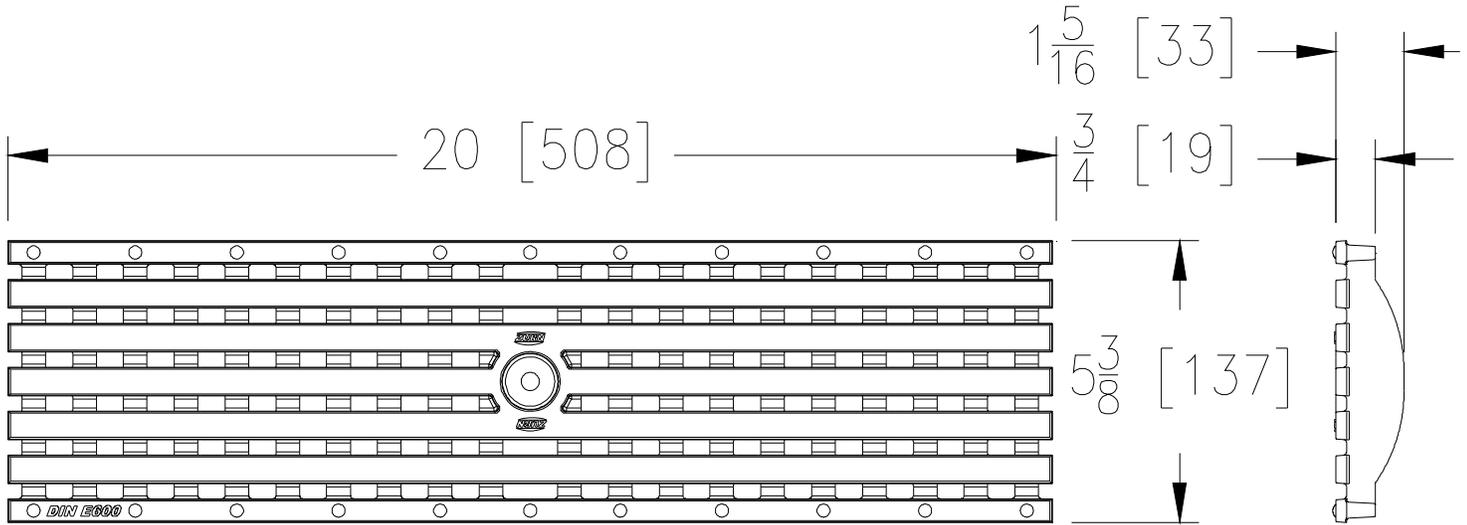

### GHPDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-GHPDE-USA

20 [508] X 5-3/8 [137] Galvanized ductile Iron heel-proof slotted grate weighing 7.8 lbs [3.5 kg] per linear foot. The grate has an open area of 11.1 in<sup>2</sup> [71.6 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.



GHPDE-USA - Heel-Proof Slotted	
Material:	Galvanized Ductile Iron
DIN Rating:	Class E
Weight:	7.8 lbs/ft. [3.5 kg]
Open Area:	11.1 in <sup>2</sup> /ft. [71.6 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-GMG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	31	64249	P6-GMG

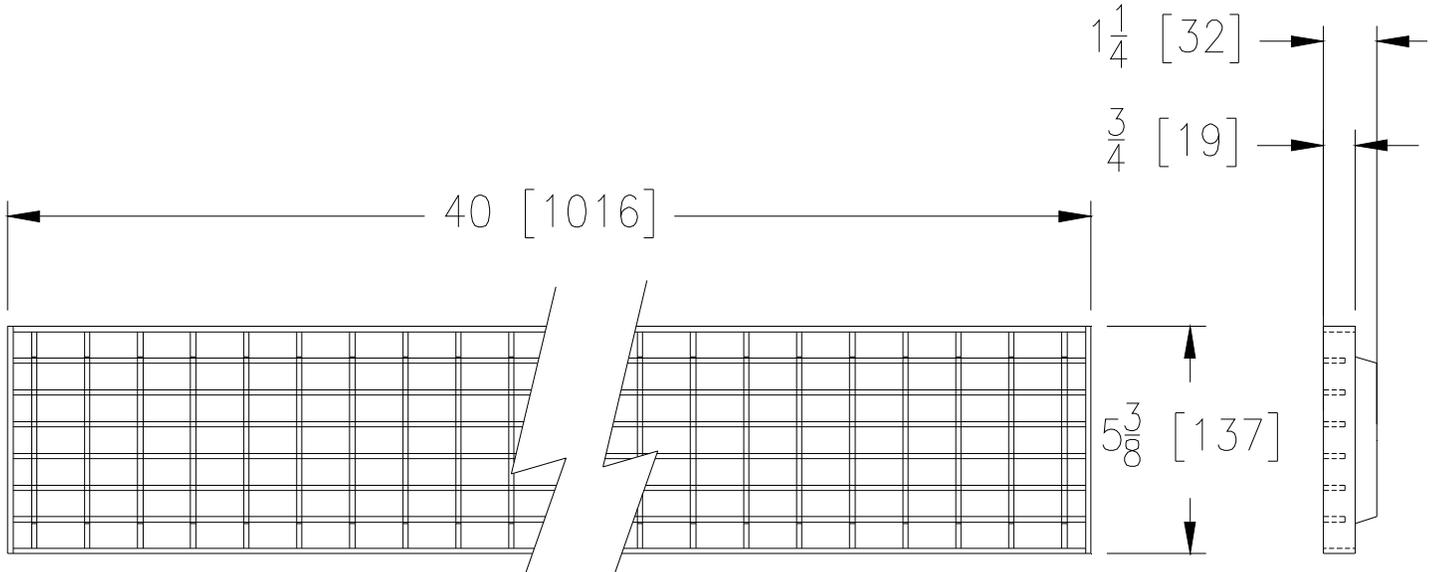

### GMG GRATE ENGINEERING SPECIFICATION: ZURN P6-GMG

20 [508] X 5-3/8 [137] Galvanized mesh screen grate weighing 3.8 lbs [1.7 kg] per linear foot. The grate has an open area of 47.0 in<sup>2</sup> [303 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty and ASTM A27 Grade 70-36. Galvanizing conforms to ASTM specification A525-87.

GMG - Mesh Screen	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	3.8 lbs/ft. [1.7 kg]
Open Area:	47.0 in <sup>2</sup> /ft. [303 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light Traffic
Slot Width/Hole Size:	1-1/8 [28.6]
ADA:	No
H-20:	No
FAA:	No




# P6-HPB

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	32	58524	P6-HPB

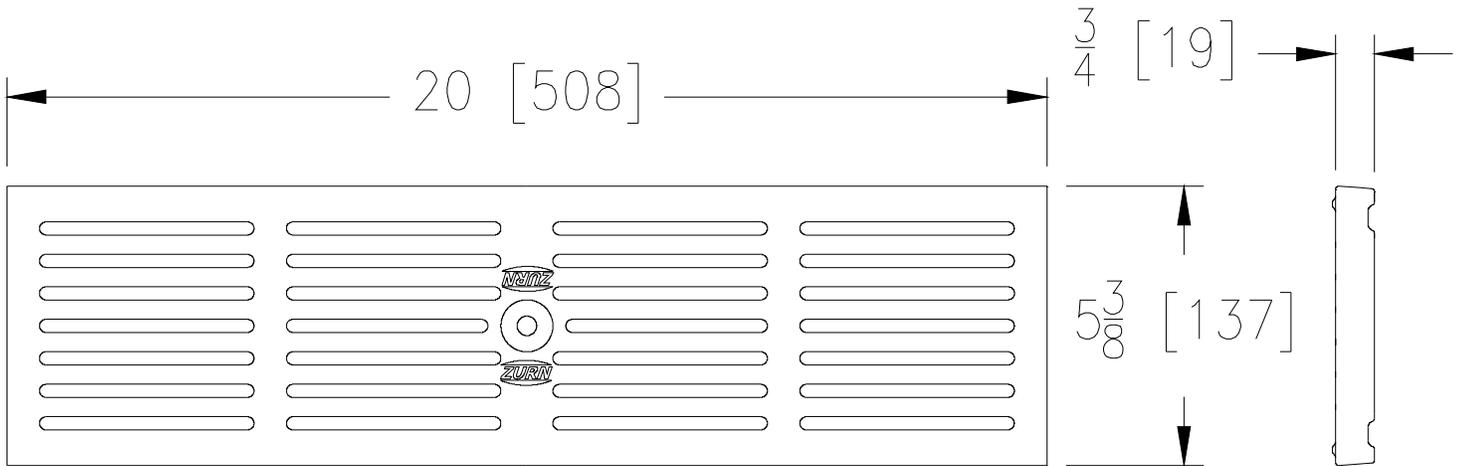

### HPB GRATE ENGINEERING SPECIFICATION: ZURN P6-HPB

20 [508] X 5-3/8 [137] Bronze heel-proof slotted grate weighing 7.8 lbs [3.5 kg] per linear foot. The grate has an open area of 17.0 in<sup>2</sup> [110 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant and ASTM b584 copper alloy NO. C844.

HPB - Heel-Proof Slotted	
Material:	Bronze
DIN Rating:	Class A
Weight:	7.8 lbs/ft. [3.5 kg]
Open Area:	17.0 in <sup>2</sup> /ft. [110 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-HPD**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	33	58524	P6-HPD

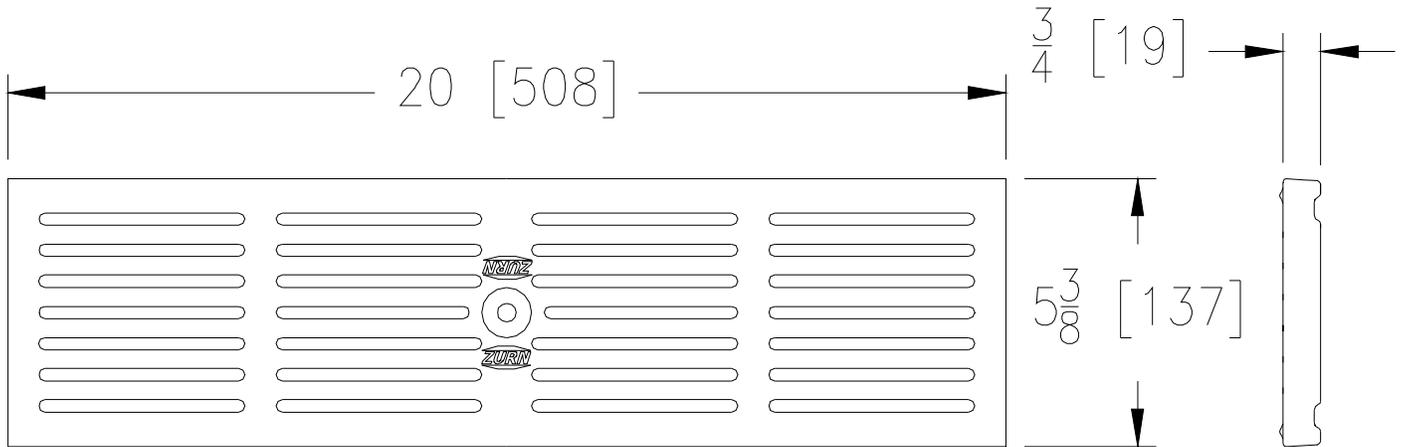

**HPD GRATE ENGINEERING SPECIFICATION: ZURN P6-HPD**

20 [508] X 5-3/8 [137] Ductile Iron heel-proof slotted grate weighing 6.3 lbs [2.9 kg] per linear foot. The grate has an open area of 17.0 in<sup>2</sup> [110 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant, and ASTM A536 Grade 80-55-06.

<b>HPD - Heel-Proof Slotted</b>	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	6.3 lbs/ft. [2.9 kg]
Open Area:	17.0 in <sup>2</sup> /ft. [110 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-HPDE

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	34	94454	P6-HPDE

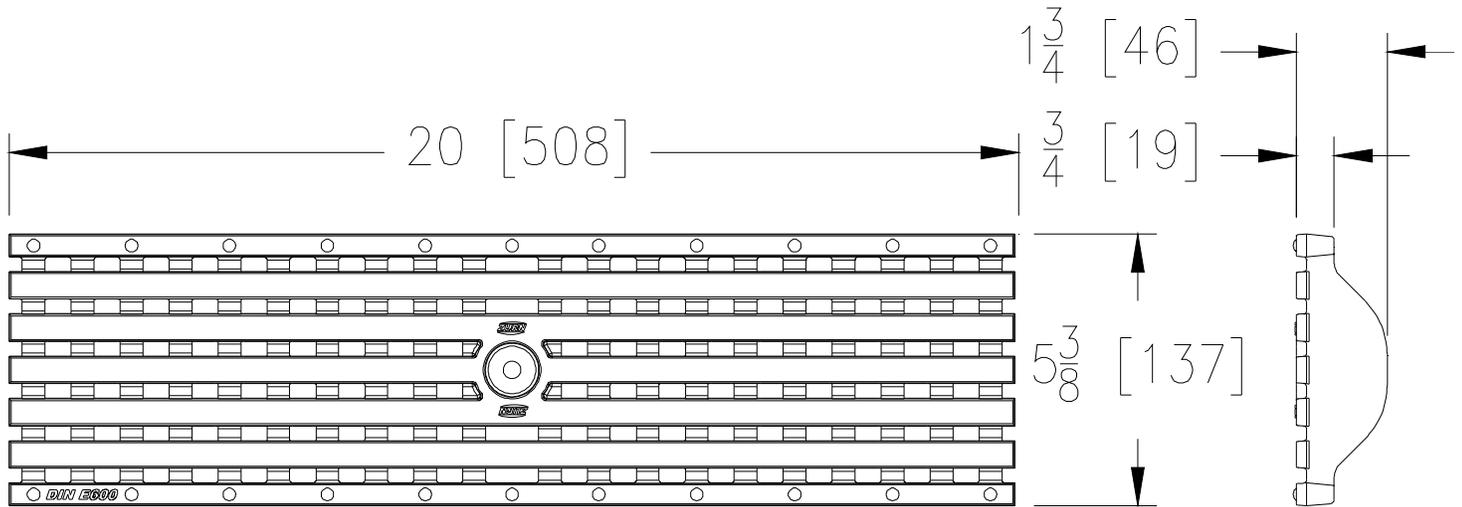

### HPDE GRATE ENGINEERING SPECIFICATION: ZURN P6-HPDE

20 [508] X 5-3/8 [137] Ductile Iron heel-proof slotted grate weighing 9.5 lbs [4.3 kg] per linear foot. The grate has an open area of 11.1 in<sup>2</sup> [71.6 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.

HPDE - Heel-Proof Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	9.5 lbs/ft. [4.3 kg]
Open Area:	11.1 in <sup>2</sup> /ft. [71.6 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	Yes




**P6-HPDE-USA**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	35	94454	P6-HPDE-USA

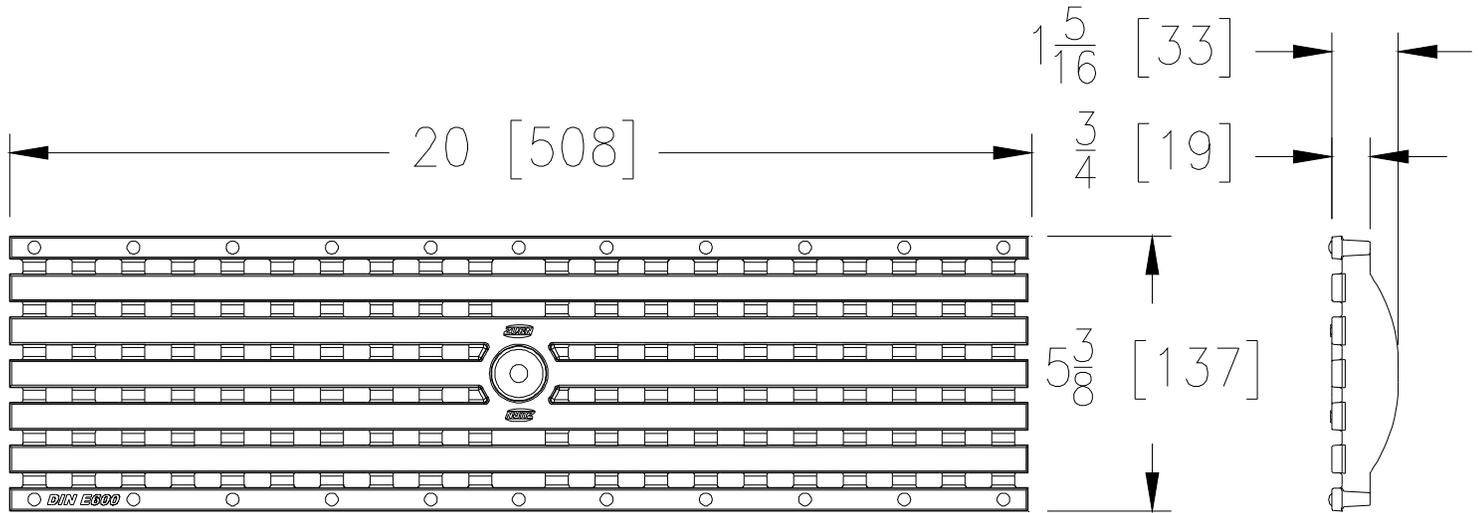

**HPDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-HPDE-USA**

20 [508] X 5-3/8 [137] Ductile Iron heel-proof slotted grate weighing 7.8 lbs [3.5 kg] per linear foot. The grate has an open area of 11.1 in<sup>2</sup> [71.6 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.



HPDE-USA - Heel-Proof Slotted	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	7.8 lbs/ft. [3.5 kg]
Open Area:	11.1 in <sup>2</sup> /ft. [71.6 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Heel-Proof, Forklifts, Commercial Aircraft
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	Yes




# P6-HPP

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	36	94001	P6-HPP

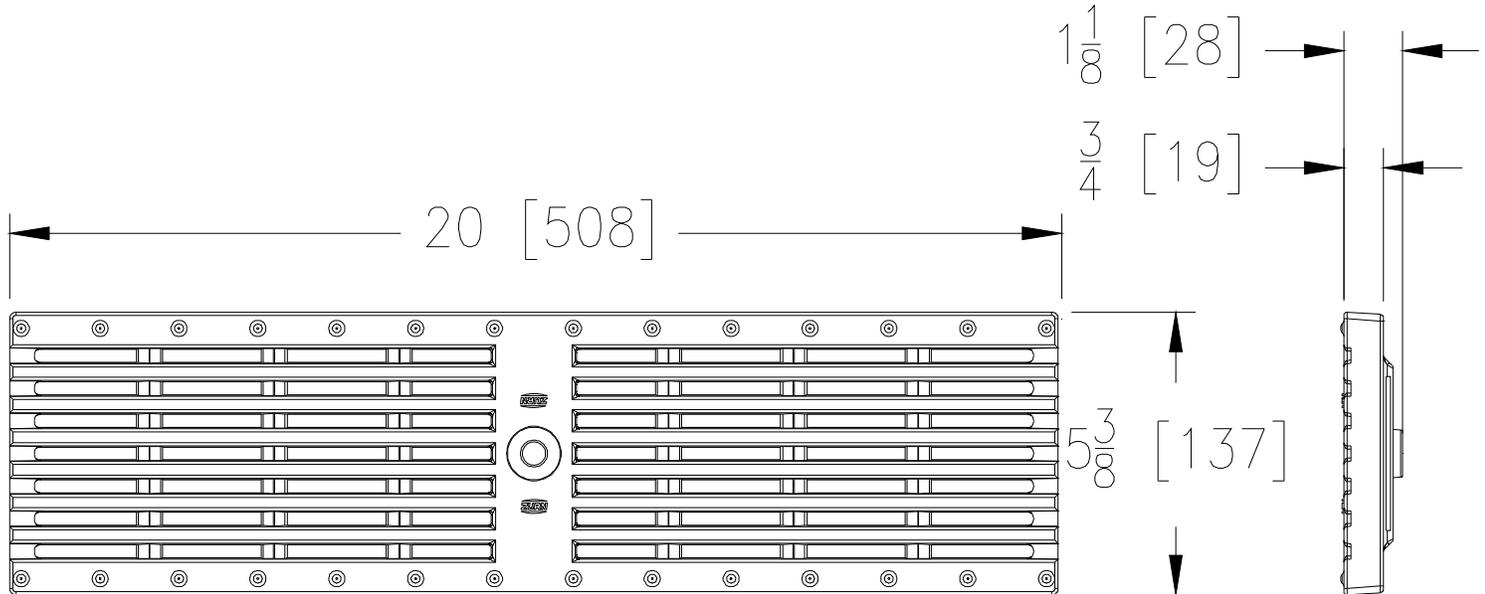

### HPP GRATE ENGINEERING SPECIFICATION: ZURN P6-HPP

20 [508] X 5-3/8 [137] High Density Polyethylene (HDPE) heel-proof slotted grate weighing .9 lbs [.41 kg] per linear foot. The grate has an open area of 17.4 in<sup>2</sup> [112 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant, and Densetec 100 HDPE or Approved Equivalent.

HPP - Heel-Proof Slotted	
Material:	HDPE
DIN Rating:	Class A
Weight:	.9 lbs/ft. [.41 kg]
Open Area:	17.4 in <sup>2</sup> /ft. [112 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-HPS

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	37	58524	P6-HPS

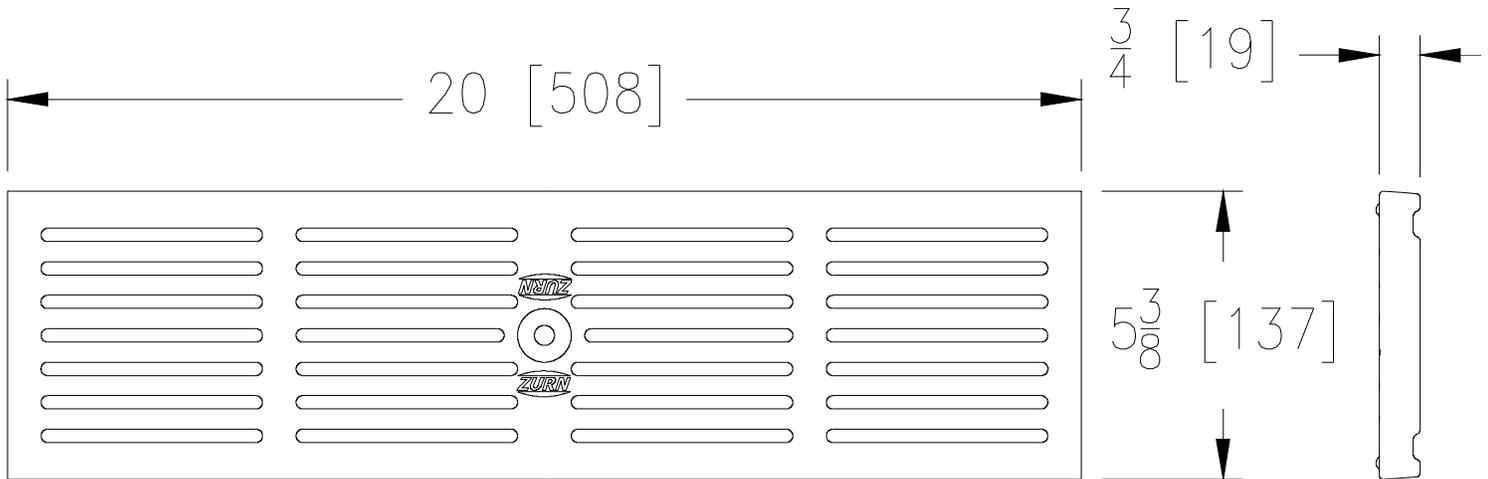

### HPS GRATE ENGINEERING SPECIFICATION: ZURN P6-HPS

20 [508] X 5-3/8 [137] Stainless Steel heel-proof slotted grate weighing 7.1 lbs [3.2 kg] per linear foot. The grate has an open area of 17.0 in<sup>2</sup> [110 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA compliant, and ASTM A351 Grade CF8 (TYPE 304) and Grade CF8M (TYPE 316).

HPS - Heel-Proof Slotted	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	7.1 lbs/ft. [3.2 kg]
Open Area:	17.0 in <sup>2</sup> /ft. [110 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof, Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-LD**  
**6 [152] Wide Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	38	57153	P6-LD

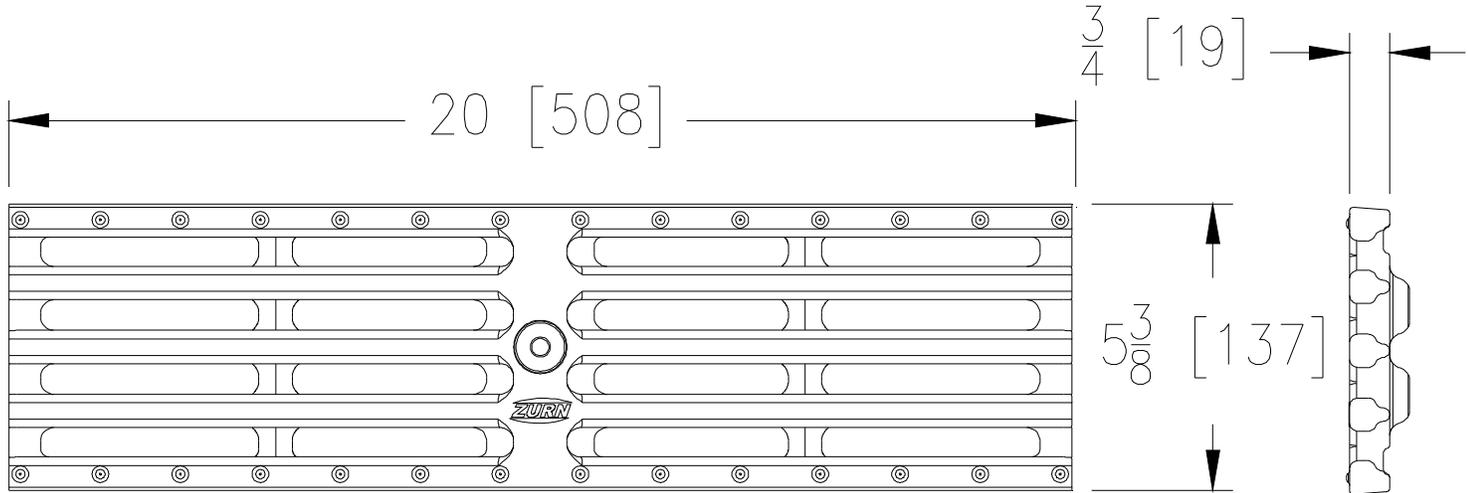

**LD GRATE ENGINEERING SPECIFICATION: ZURN P6-LD**

20 [508] X 5-3/8 [137] Ductile Iron longitudinally slotted grate weighing 6.7 lbs [3 kg] per linear foot. The grate has an open area of 20.5 in<sup>2</sup> [132 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, and ASTM A536 Grade 80-55-06.

<b>LD - Longitudinal Slotted</b>	
Material:	Ductile Iron
DIN Rating:	Class B
Weight:	6.7 lbs/ft. [3 kg]
Open Area:	20.5 in <sup>2</sup> /ft. [132 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Sidewalks,
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	No
FAA:	No




# P6-NBZ-USA

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	39	64054	P6-NBZ-USA

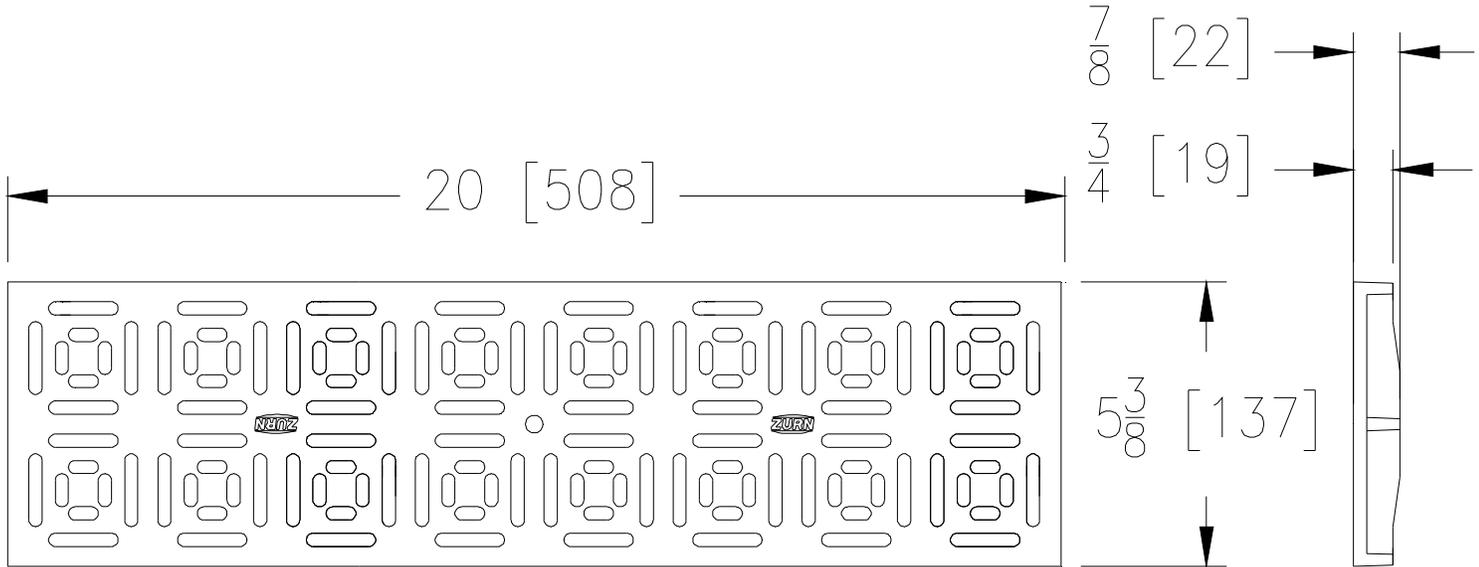

### NBZ-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-NBZ-USA

20 [508] X 5-3/8 [137] Nickel Bronze decorative grate weighing 5.7 lbs [2.6 kg] per linear foot. The grate has an open area of 16.9 in<sup>2</sup> [109 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty and ASTM B584 Copper alloy NO. C997.



NBZ-USA - Decorative	
Material:	Nickel Bronze
DIN Rating:	Class A
Weight:	5.7 lbs/ft. [2.6 kg]
Open Area:	16.9 in <sup>2</sup> /ft. 109 cm <sup>2</sup>
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No




# P6-PDE-USA

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	40	84474	P6-PDE-USA

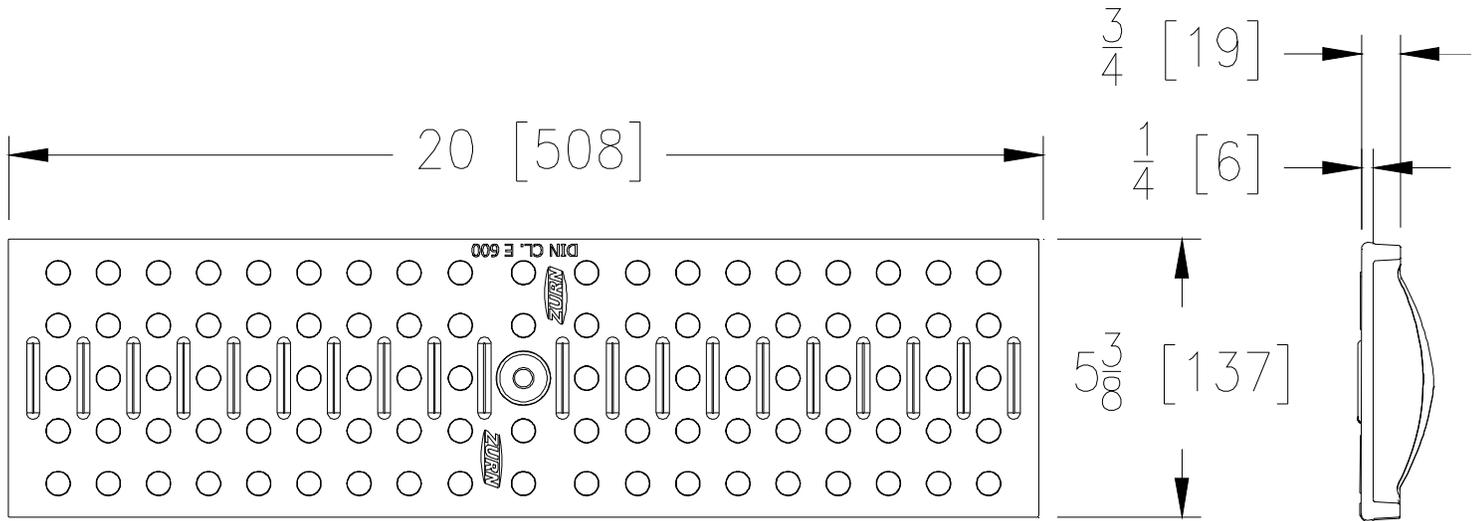

### PDE-USA GRATE ENGINEERING SPECIFICATION: ZURN P6-PDE-USA

20 [508] X 5-3/8 [137] Ductile Iron perforated grate weighing 7.4 lbs [3.4 kg] per linear foot. The grate has an open area of 9.13 in<sup>2</sup> [58.9 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of E, ANSI rating of Special-Duty, ADA Compliant, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.

PDE-USA - Decorative	
Material:	Ductile Iron
DIN Rating:	Class E
Weight:	7.4 lbs/ft. [3.4 kg]
Open Area:	9.13 in <sup>2</sup> /ft. [58.9 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Fork Lift Rated
Slot Width/Hole Size:	29/64 [11.5]
ADA:	Yes
H-20:	Yes
FAA:	Yes






# P6-PG

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	41	64078	P6-PG

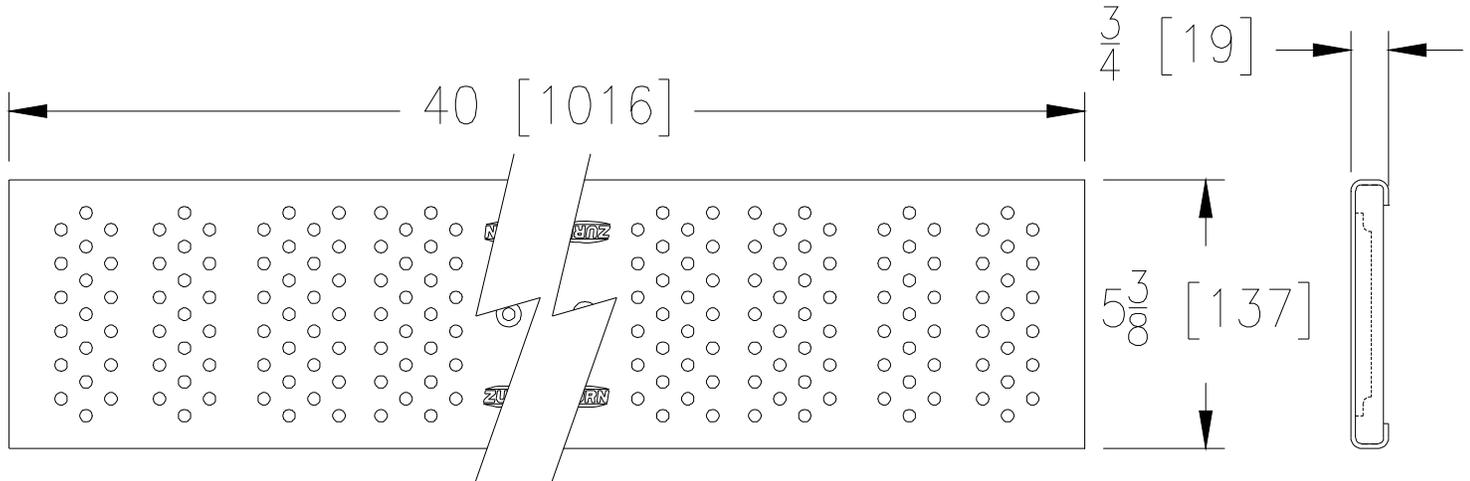

### PG GRATE ENGINEERING SPECIFICATION: ZURN P6-PG

40 [1016] X 5-3/8 [137] Galvanized steel fabricated perforated grate weighing 1.6 lbs [.7 kg] per linear foot. The grate has an open area of 5.3 in<sup>2</sup> [34.2 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant. Carbon steel conforms to ASTM A653 Type CS-B, galvanized coating designation G60, minimum spangle.



PG - Fabricated Perforated	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.6 lbs/ft. [.7 kg]
Open Area:	5.3 in <sup>2</sup> /ft. [34.2 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-PGR

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	42	301238	P6-PGR

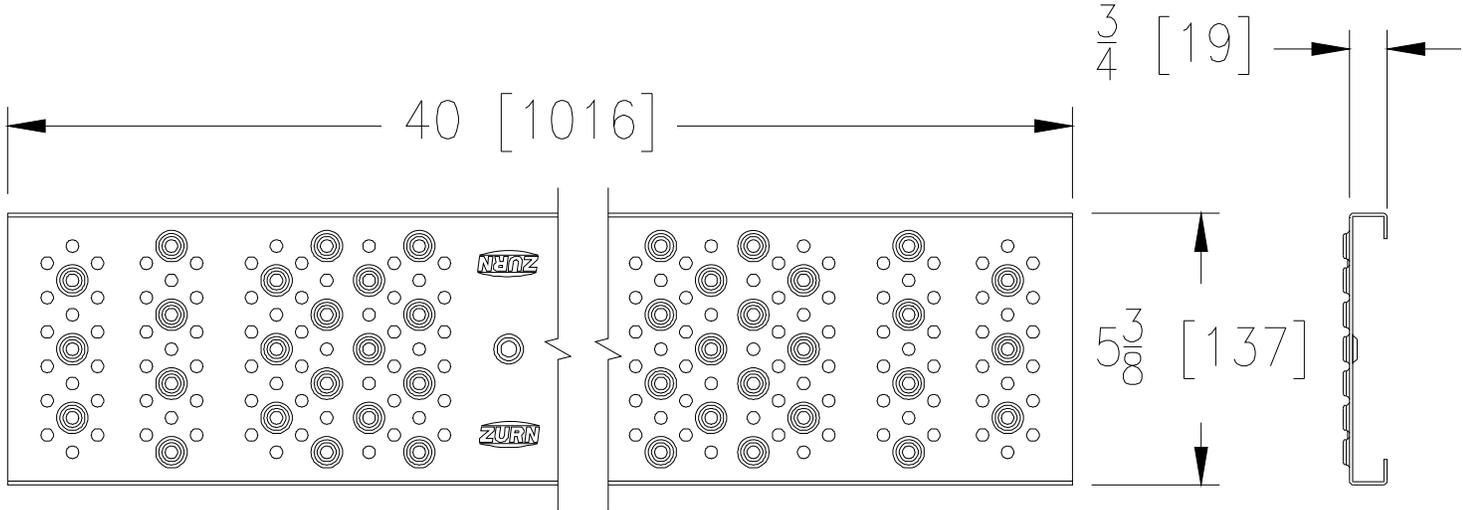

### PGR GRATE ENGINEERING SPECIFICATION: The Zurn P6-PGR

40 [1016] X 5-3/8 [137] Galvanized steel fabricated raised perforated grate weighing 1.8 lbs [.82 kg] per linear foot. The grate has an open area of 5.3 in<sup>2</sup> [34.2 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A653, Type CS-B. Galvanized coating designation G60, minimum spangle.



PGR - Raised Perforated	
Material:	Galvanized Steel
DIN Rating:	Class A
Weight:	1.8 lbs/ft. [.82 kg]
Open Area:	5.3 in <sup>2</sup> /ft. [34.2 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-PPC**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	43	94149	P6-PPC

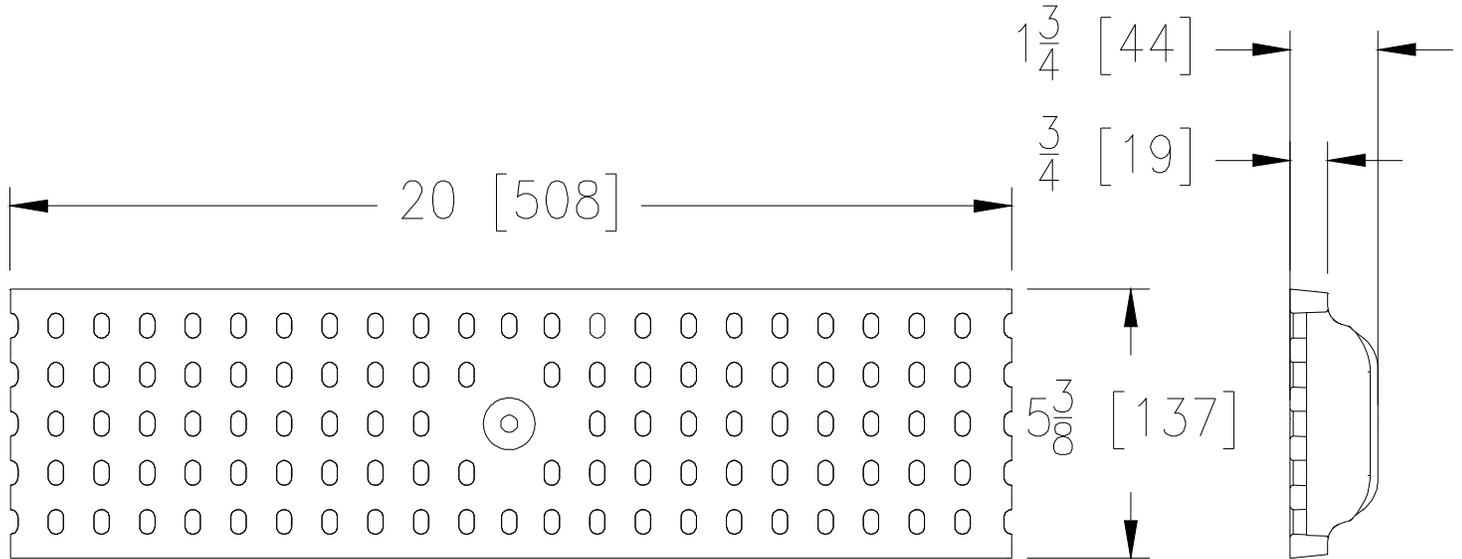

**PPC GRATE ENGINEERING SPECIFICATION: ZURN P6-PPC**

20 [508] X 5-3/8 [137] Vinylester perforated plastic grate weighing 3.3 lbs [1.5 kg] per linear foot. The grate has an open area of 6.6 in<sup>2</sup> [42.6 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty and ADA Compliant, and Interplastic CORVE8300 or Reichhold DION 9100 or equivalent.



<b>PPC - Perforated Grate</b>	
Material:	Vinylester
DIN Rating:	Class C
Weight:	3.3 lbs/ft. [1.5 kg]
Open Area:	6.6 in <sup>2</sup> /ft. [42.6 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Heavy Loads, Non-metallic, Chemical
Slot Width/Hole Size:	19/64 [7.5]
ADA:	Yes
H-20:	No
FAA:	No




**P6-PS**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	44	64078	P6-PS

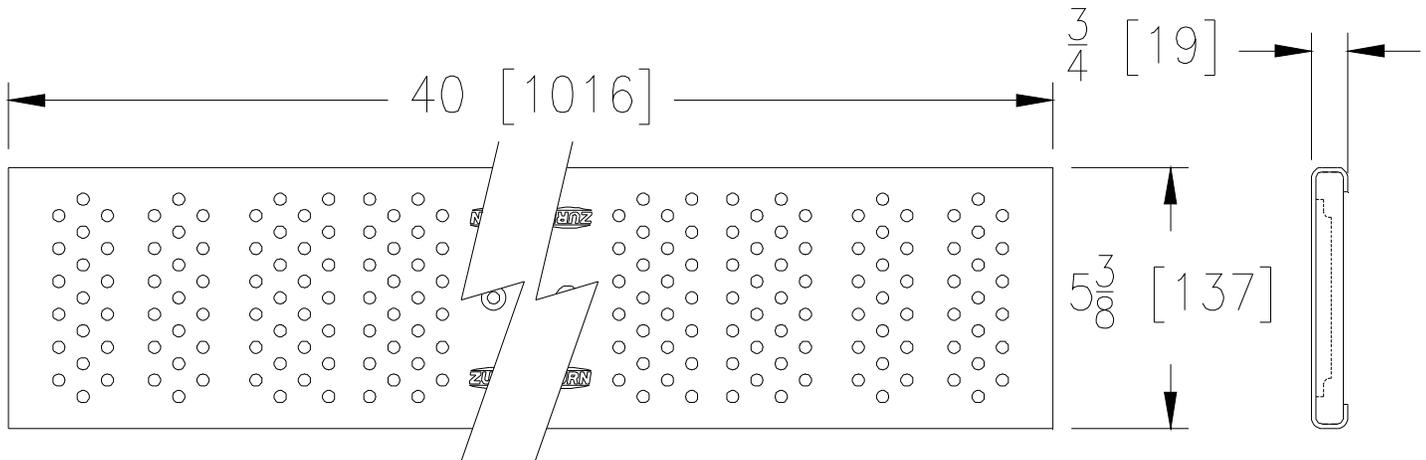

**PS GRATE ENGINEERING SPECIFICATION: ZURN P6-PS**

40 [1016] X 5-3/8 [137] Stainless steel perforated plastic grate weighing 1.8 lbs [.82 kg] per linear foot. The grate has an open area of 5.3 in<sup>2</sup> [34.2 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A240 Type 304 (or 316 by request).



<b>PS - Fabricated Perforated</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.8 lbs/ft. [.82 kg]
Open Area:	5.3 in <sup>2</sup> /ft. [34.2 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-PSR

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	45	301238	P6-PSR

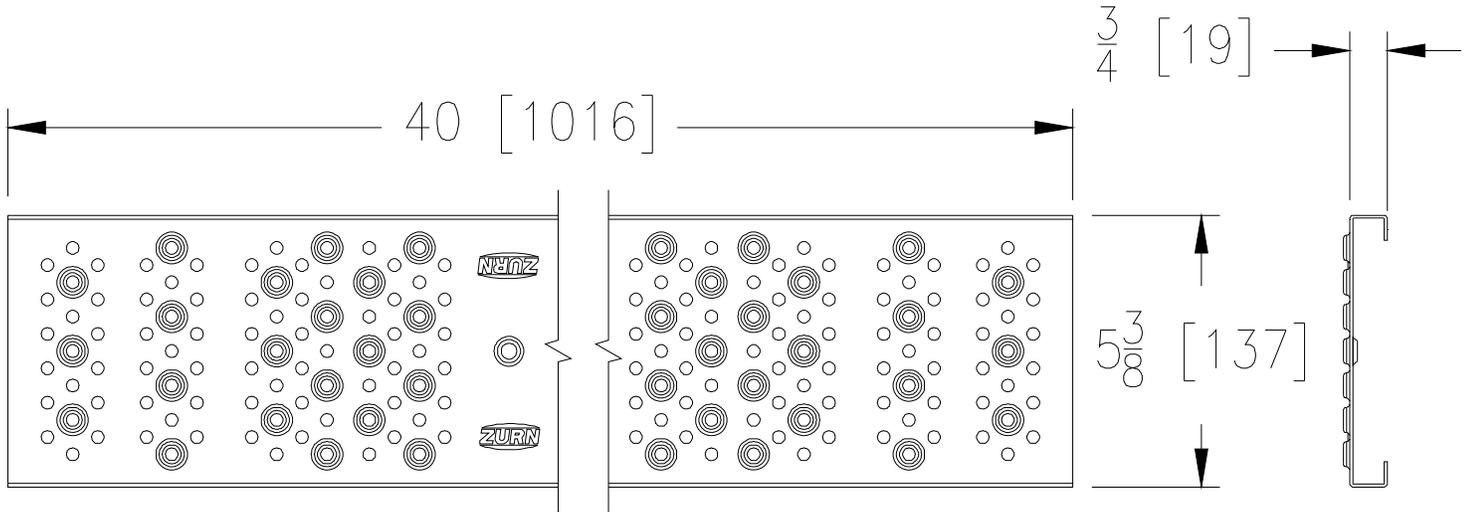

### PSR GRATE ENGINEERING SPECIFICATION: ZURN P6-PSR

40 [1016] X 5-3/8 [137] Stainless steel fabricated raised perforated grate weighing 1.9 lbs [.86 kg] per linear foot. The grate has an open area of 5.3 in<sup>2</sup> [34.2 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant, and ASTM A240 Type 304 (or 316 by request).



PSR - Raised Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.9 lbs/ft. [.86 kg]
Open Area:	5.3 in <sup>2</sup> /ft. [34.2 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




**P6-RFG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	46	64063	P6-RFG

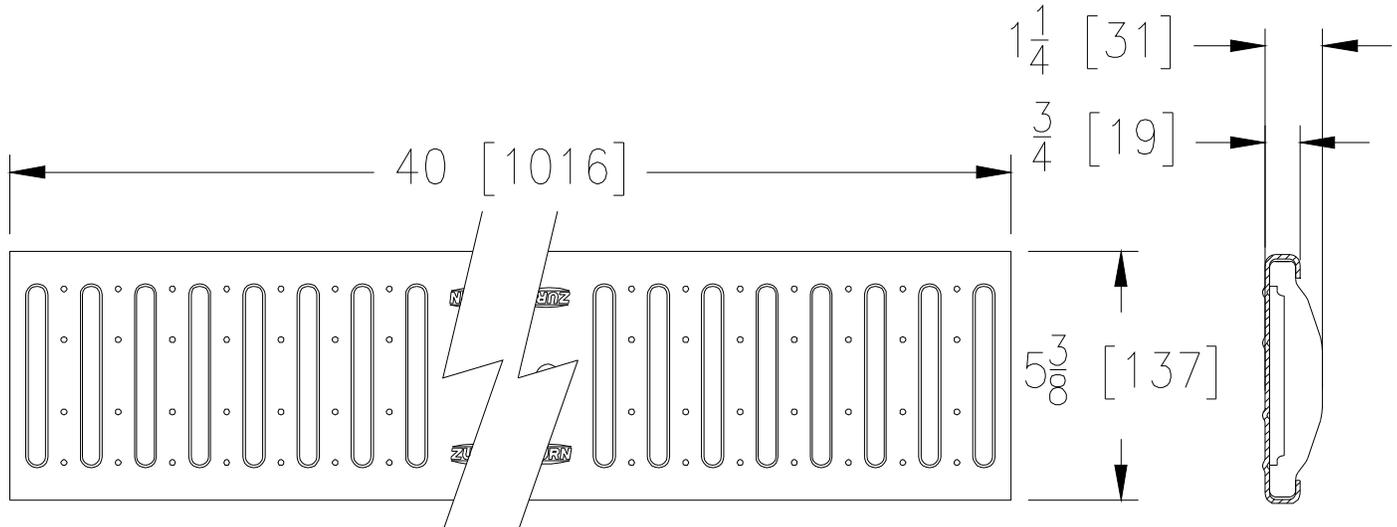

**RFG GRATE ENGINEERING SPECIFICATION: ZURN P6-RFG**

40 [1016] X 5-3/8 [137] Galvanized steel reinforced slotted grate weighing 4.0 lbs [1.8 kg] per linear foot. The grate has an open area of 12.0 in<sup>2</sup> [77.4 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty. Galvanized skin conforms to ASTM A653, galvanized coating designation G60, and minimum spangle. Galvanized (hot dip) reinforcements conform to ASTM A123.

<b>RFG - Reinforced Slotted</b>	
Material: Galvanized Steel & Galvanized Ductile Iron	
DIN Rating: Class B	
Weight: 4.0 lbs/ft. [1.8 kg]	
Open Area: 12.0 in <sup>2</sup> /ft. [77.4 cm <sup>2</sup> ]	
ANSI Rating: Medium-Duty	
Application: Sidewalks, Light Vehicle	
Slot Width/Hole Size: 3/8 [9.5]	
ADA:	No
H-20:	No
FAA:	No




# P6-RFGC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	47	308340	P6-RFGC

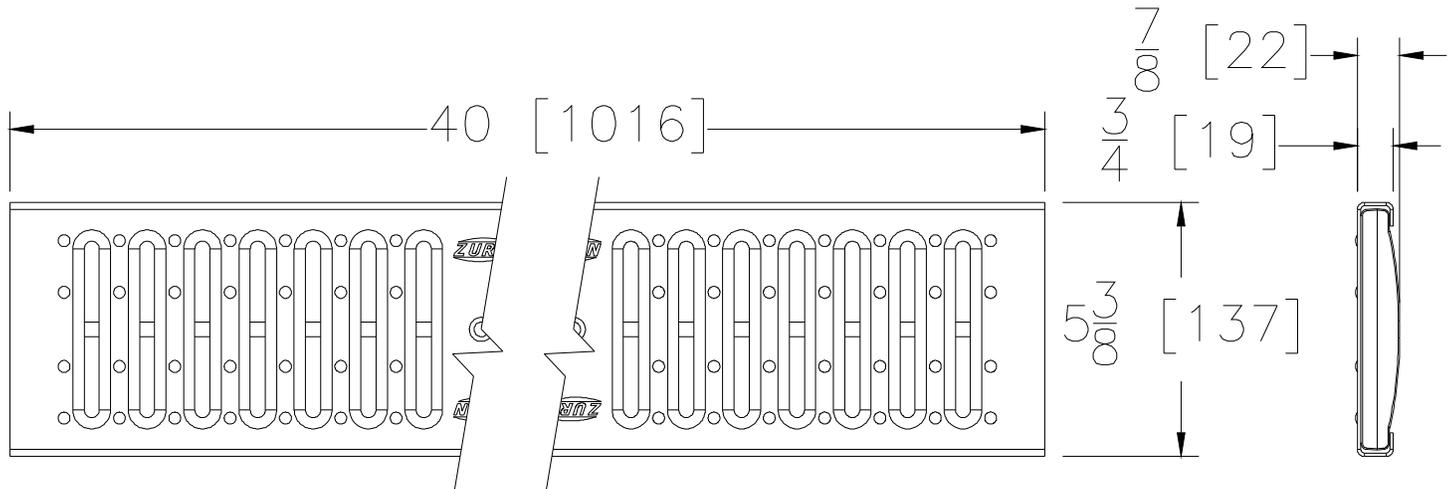

### RFGC GRATE ENGINEERING SPECIFICATION: ZURN P6-RFGC

40 [1016] X 5-3/8 [137] Galvanized steel reinforced slotted grate weighing 4.8 lbs [2.2 kg] per linear foot. The grate has an open area of 12.0 in<sup>2</sup> [77.4 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated. Galvanized skin conforms to ASTM A653, galvanized coating designation G60 and minimum spangle. Ductile Iron reinforcement ASTM A536 Grade 80-55-06. Galvanized (hot dip) conform to ASTM A123.

RFGC - Reinforced Slotted	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.8 lbs/ft. [2.2 kg]
Open Area:	12.0 in <sup>2</sup> /ft. [77.4 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	Yes
FAA:	No




# P6-RFSC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	48	308340	P6-RFSC

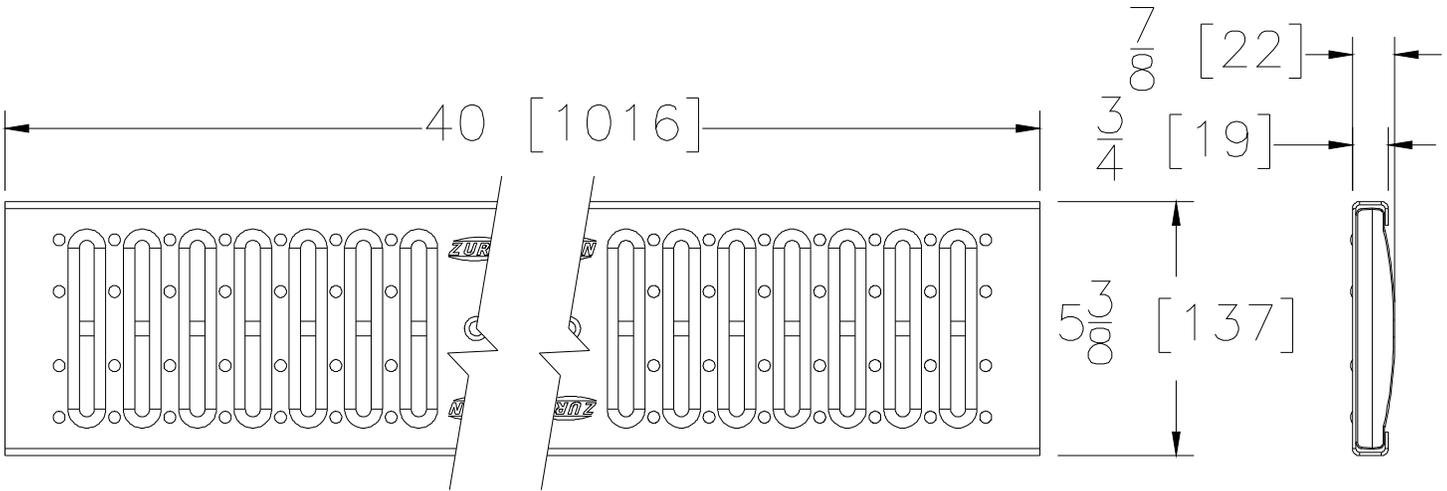

### RFSC GRATE ENGINEERING SPECIFICATION: ZURN P6-RFSC

40 [1016] X 5-3/8 [137] Stainless steel reinforced slotted grate weighing 5.2 lbs [2.4 kg] per linear foot. The grate has an open area of 12.0 in<sup>2</sup> [77.4 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty. H-20 load rating. Stainless steel grate conforms to ASTM A351 Type 304 (Grade CF8M Type 316 by request) cast body and A-240 TYPE 304 (or 316 by request) for grate skin.

RFSC - Reinforced Slotted	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.2 lbs/ft. [2.4 kg]
Open Area:	12.0 in <sup>2</sup> /ft. [77.4 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	Yes
FAA:	No




# P6-RPG

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	49	64078	P6-RPG

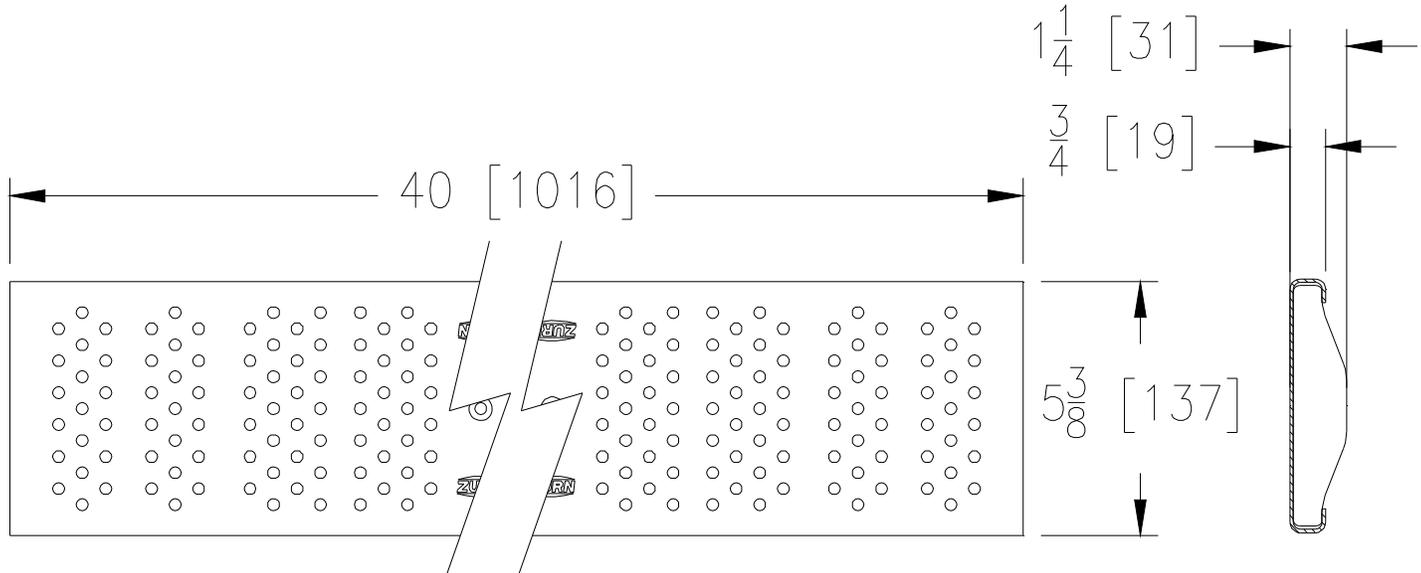

### RPG GRATE ENGINEERING SPECIFICATION: ZURN P6-RPG

40 [1016] X 5-3/8 [137] Galvanized steel reinforced perforated grate weighing 4.0 lbs [1.8 kg] per linear foot. The grate has an open area of 5.3 in<sup>2</sup> [34.2 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA Compliant, and ASTM A653. Type CS-B Galvanized Coating designation G60, minimum spangle. Ductile Iron reinforcements ASTM A536-B4 Grade 80-55-06. Galvanized (hot dip) conform to ASTM A123.

RPG - Reinforced Perforated	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	4.0 lbs/ft. [1.8 kg]
Open Area:	5.3 in <sup>2</sup> /ft. [34.2 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof Pedestrian
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-RPGC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	50	308342	P6-RPGC

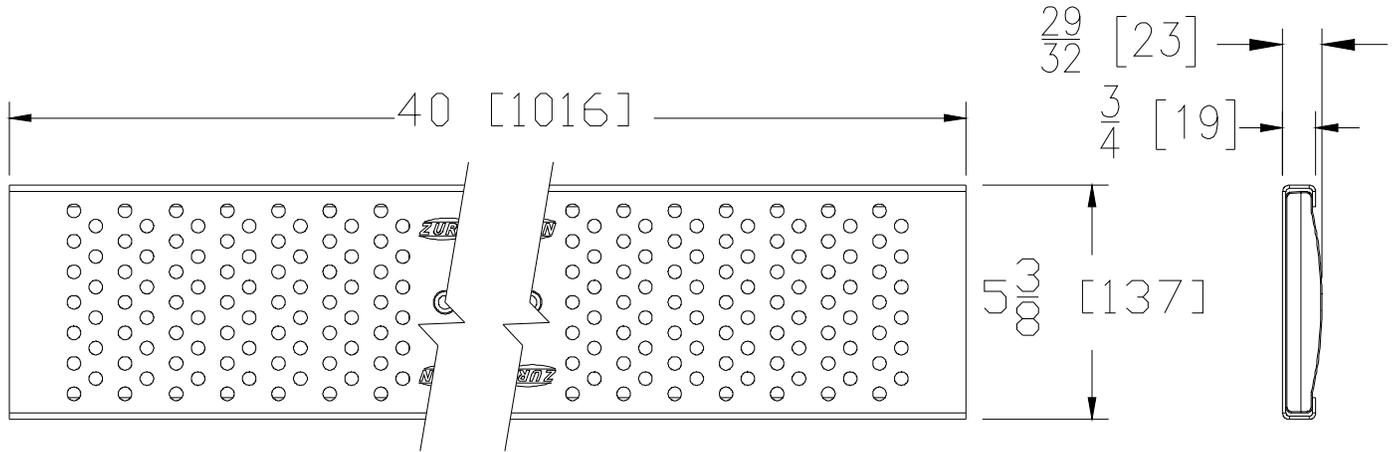

### RPGC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPGC

40 [1016] X 5-3/8 [137] Galvanized steel reinforced perforated grate weighing 4.7 lbs [2.1 kg] per linear foot. The grate has an open area of 8.3 in<sup>2</sup> [53.5 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated, and ASTM A653. Galvanized coating designation G60, minimum spangle. Ductile Iron reinforcement ASTM A536 Grade 80-55-06. Galvanized (hot dip) reinforcements conform to ASTM A123.

RPGC - Reinforced Perforated	
Material: Galvanized Steel & Galvanized Ductile Iron	
DIN Rating:	Class C
Weight:	4.7 lbs/ft. [2.1 kg]
Open Area:	8.3 in <sup>2</sup> /ft. [53.5 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No




# P6-RPGR

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	51	304738	P6-RPGR

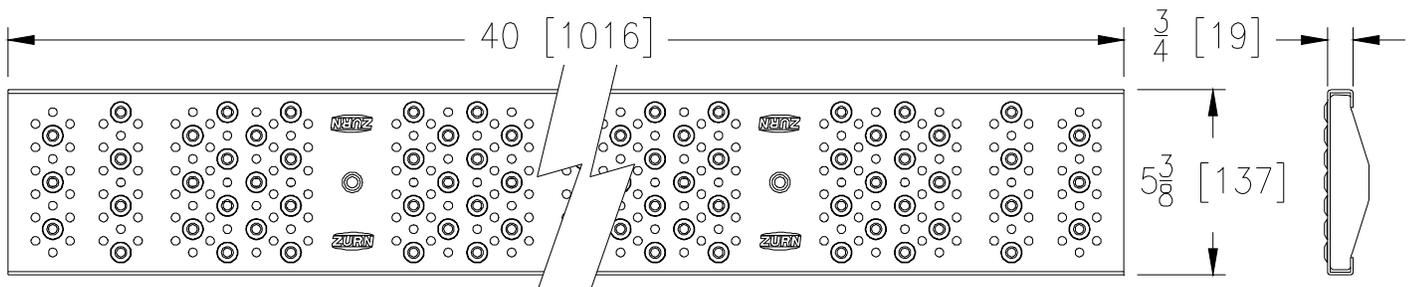

### RPGR GRATE ENGINEERING SPECIFICATION: ZURN P6-RPGR

40 [1016] X 5-3/8 [137] Galvanized steel reinforced perforated grate weighing 3.8 lbs [1.7 kg] per linear foot. The grate has an open area of 5.3 in<sup>2</sup> [34.2 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium Duty, ADA Compliant. Galvanized Sheet conforms to ASTM Specification A653, Type CS-B Galvanized coating designation G60, minimum spangle. Hot Dip Galvanizing on Reinforcement conforms to ASTM Specification A123.

RPGR - Reinforced Perforated Reverse Punch	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	3.8 lbs/ft. [1.7 kg]
Open Area:	5.3 in <sup>2</sup> /ft. [34.2 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-RPGRC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	52	308341	P6-RPGRC

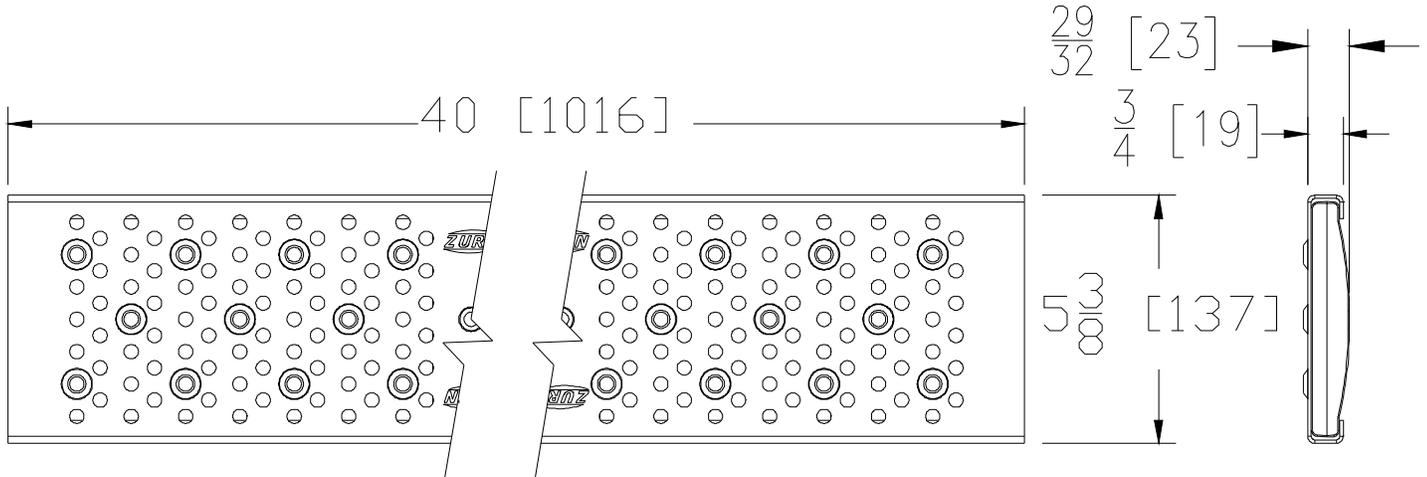

### RPGRG GRATE ENGINEERING SPECIFICATION: ZURN P6-RPGRC

40 [1016] X 5-3/8 [137] Galvanized steel reinforced perforated grate weighing 4.7 lbs [.21] per linear foot. The Grate has an open area of 8.3 in<sup>2</sup> [53.5 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated, and ASTM A653. Type CS-B Galvanized coating designation G60, minimum spangle. Ductile Iron reinforcement ASTM A536 Grade 80-55-06. Galvanized (hot dip) reinforcements conform to ASTMA123.

RPGRG - Reinforced Perforated Reverse Punch	
Material:	Galvanized Steel & Galvanized Ductile Iron
DIN Rating:	Class C
Weight:	4.7 lbs/ft. [.21 kg]
Open Area:	8.3 in <sup>2</sup> /ft. [53.5 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No




# P6-RPSC

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	53	308342	P6-RPSC

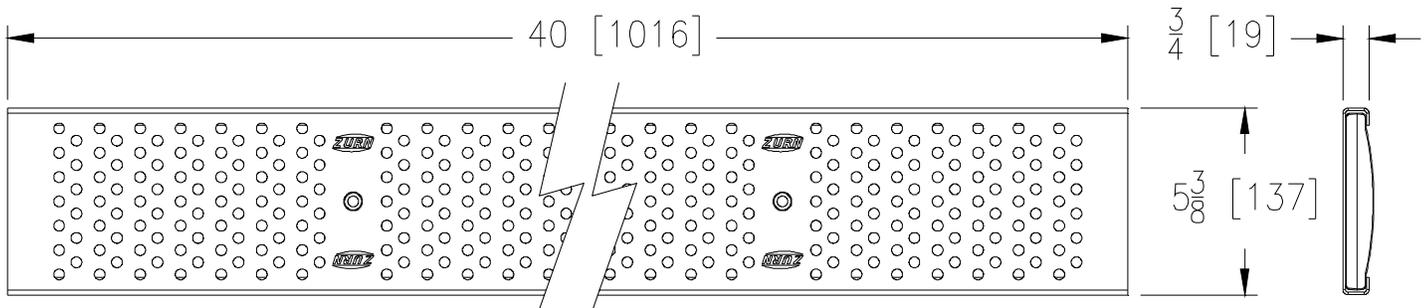

### RPSC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPSC

40 [1016] X 5-3/8 [137] Stainless steel reinforced perforated grate weighing 5.1 lbs [2.3 kg] per linear foot. The grate has an open area of 8.3 in<sup>2</sup> [53.5 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20 load rated, ADA Compliant. Stainless steel grate conforms to ASTM A351 Grade CF8 Type 304 (Grade CF8M, Type 316 by request) for cast reinforcement and A-240 TYPE 304 for grate skin.

RPSC - Reinforced Perforated	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.1 lbs/ft. [2.3 kg]
Open Area:	8.3 in <sup>2</sup> /ft. [53.5 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No




**P6-RPSRC**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	54	308341	P6-RPSRC

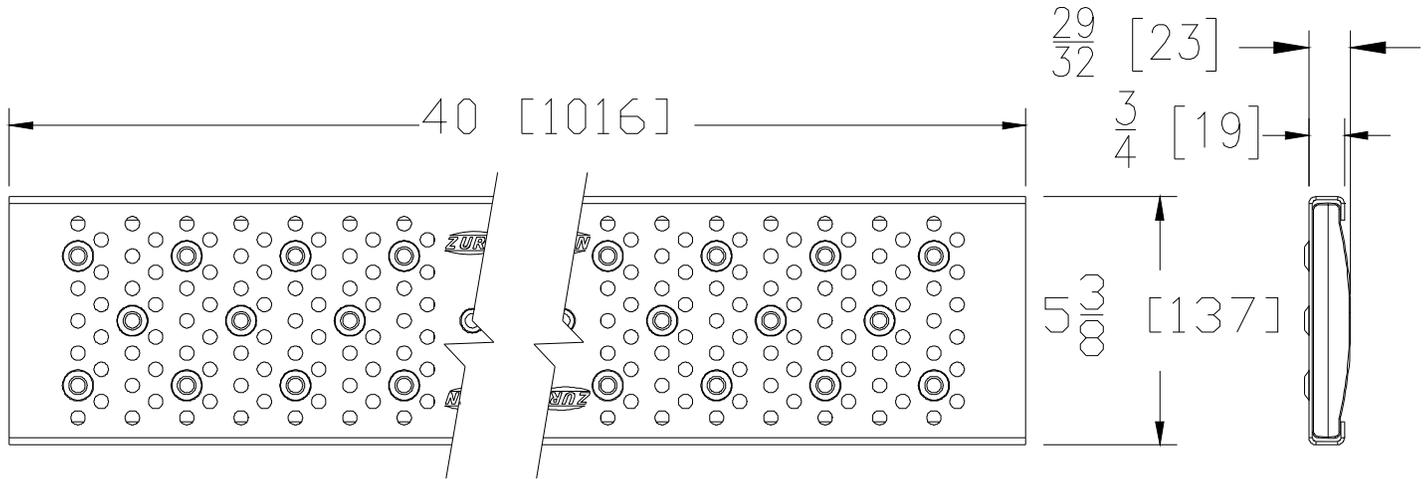

**RPSRC GRATE ENGINEERING SPECIFICATION: ZURN P6-RPSRC**

40 [1016] X 5-3/8 [137] Stainless steel reinforced perforated grate weighing 5.1 lbs [2.3 kg] per linear foot. The grate has an open area of 8.3 in<sup>2</sup> [53.5 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, ADA Compliant, H-20 load rated. Stainless steel grate conforms to ASTM A351 Grade CF8 Type 304 (Grade CF8M, Type 316 by request) for cast reinforcement and A-240 TYPE 304 for grate skin.

<b>RPSRC - Reinforced Perforated Reverse Punch</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class C
Weight:	5.1 lbs/ft. [2.3 kg]
Open Area:	8.3 in <sup>2</sup> /ft. [53.5 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Roadway
Slot Width/Hole Size:	5/16 [8]
ADA:	Yes
H-20:	Yes
FAA:	No




# P6-SBG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	55	94221	P6-SBG

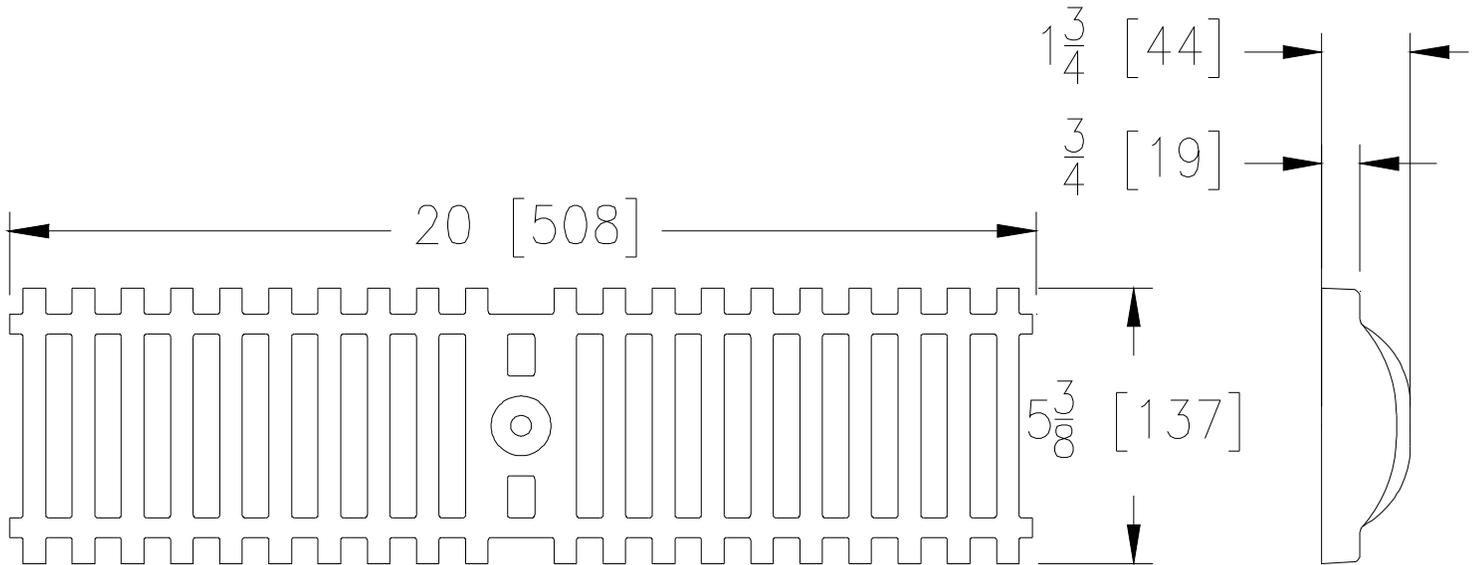

### SBG GRATE ENGINEERING SPECIFICATION: ZURN P6-SBG

20 [508] X 5-3/8 [137] Stainless steel cast bar grate weighing 9.4 lbs [4.3 kg] per linear foot. The grate has an open area of 27.7 in<sup>2</sup> [179 cm<sup>2</sup>] per linear foot, DIN rating of E, ANSI rating of Special-Duty, H-20 and FAA load rated, and A351 Grade CF8 Type 304 (Grade CF8M (TYPE 316 by request).

SBG - Cast Bar Grate	
Material:	Stainless Steel
DIN Rating:	Class E
Weight:	9.4 lbs/ft. [4.3 kg]
Open Area:	27.7 in <sup>2</sup> /ft. [179 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Dynamic Loads
Slot Width/Hole Size:	1/2 [12.7]
ADA:	No
H-20:	Yes
FAA:	Yes




**P6-SC**  
6 [152] Wide S.S. Solid Cover

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	56	60746	P6-SC

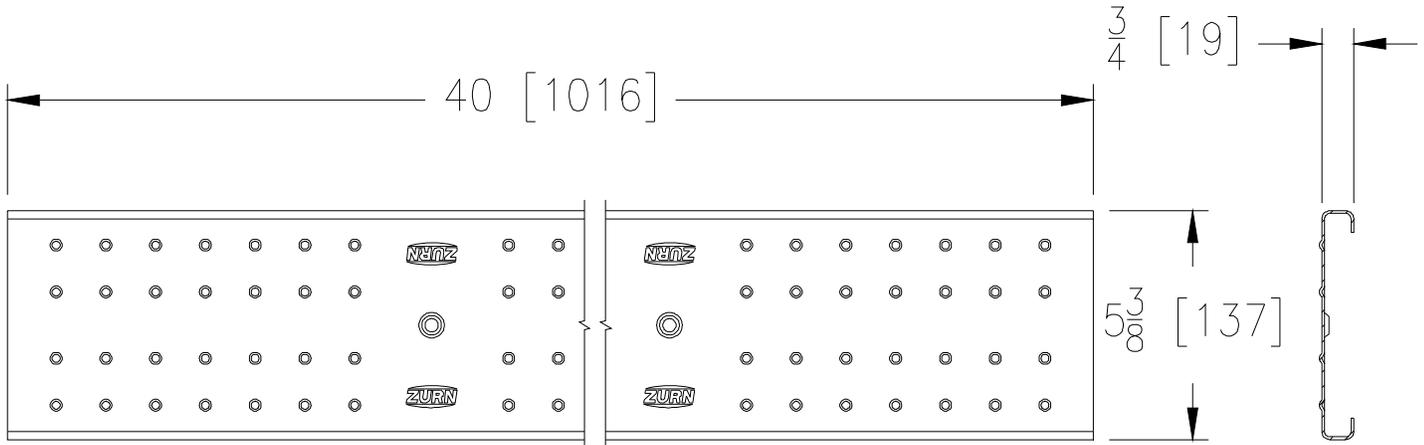

**SC GRATE ENGINEERING SPECIFICATION: ZURN P6-SC**

40 [1016] X 5-3/8 [137] Stainless steel fabricated solid cover weighing 1.6 [.73 kg] lbs per linear foot. Grate conforms to DIN rating of A, ANSI Rating of Light-Duty, ADA Compliant and ASTM specification A240 Type 304 (316 by request).

<b>SC - S.S. Solid Cover</b>	
Material:	Type 304 Stainless Steel
DIN Rating:	Class A
Weight:	1.6 lbs/ft. [.73 kg]
Open Area:	0
ANSI Rating:	Light-Duty
Application:	Heel-Proof pedestrian
Slot Width/Hole Size:	N/A
ADA:	Yes
H-20:	No
FAA:	No




# P6-SCD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	57	64255	P6-SCD

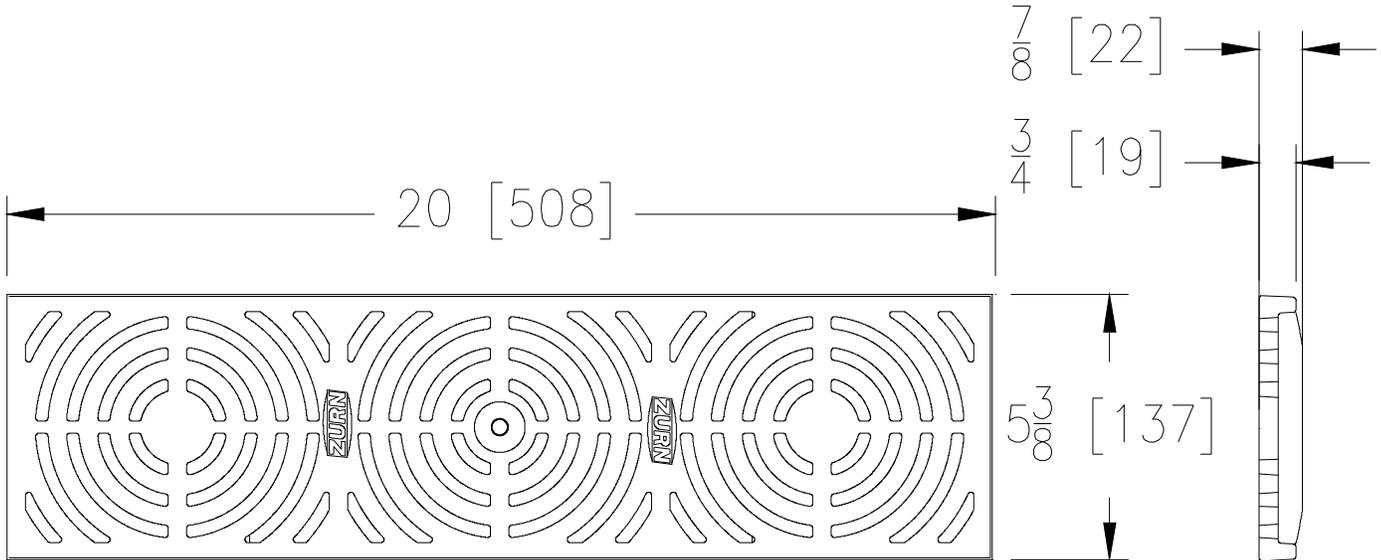

### SCD GRATE ENGINEERING SPECIFICATION: ZURN P6-SCD

20 [508] X 5-3/8 [137] Stainless steel circular decorative grate weighing 7.2 lbs [3.3 kg] per linear foot. The grate has an open area of 17.6 in<sup>2</sup> [114 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty and ASME A351 Grade CF8 Type 304 (Grade CF8M by request Type 316).

SCD - Circular Decorative	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	7.2 lbs/ft. [3.3 kg]
Open Area:	17.6 in <sup>2</sup> /ft. [114 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No




# P6-SDD

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	58	67506	P6-SDD

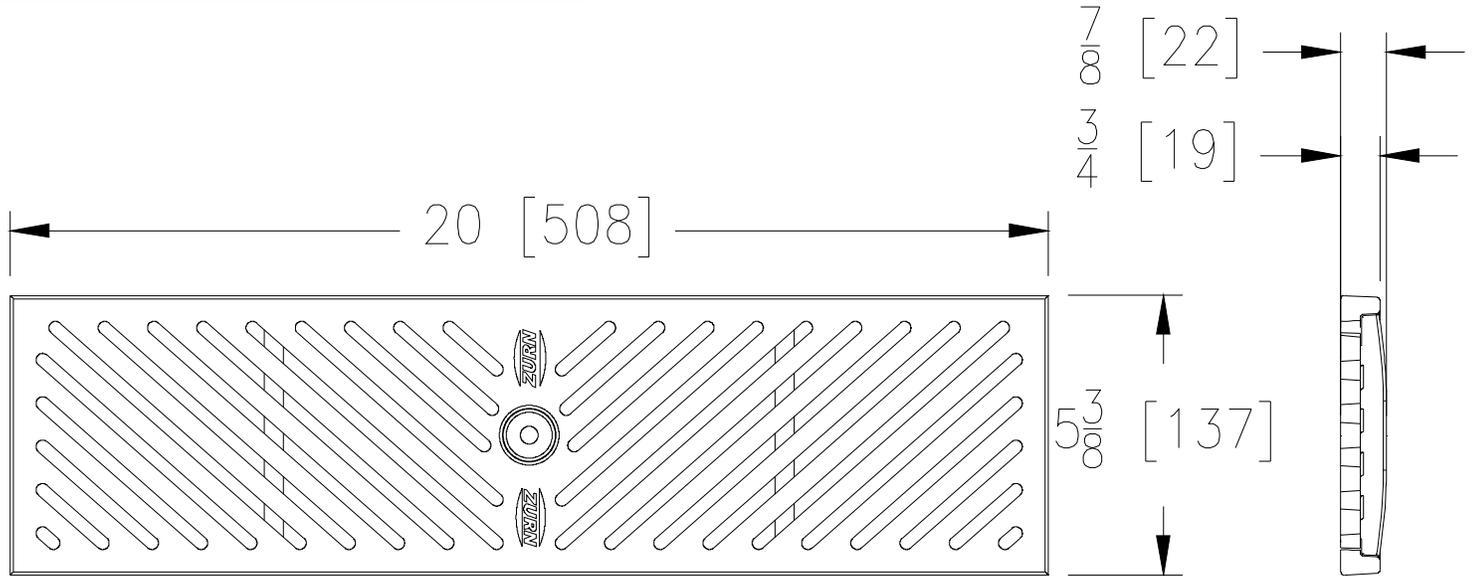

### SDD GRATE ENGINEERING SPECIFICATION: ZURN P6-SDD

20 [508] X 5-3/8 [137] Stainless steel diagonal decorative grate weighing 6.3 lbs [2.9 kg] per linear foot. The grate has an open area of 17.9 in<sup>2</sup> [115 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA Compliant and ASME A351 Grade CF8 TypeE 304 (Grade CF8M Type 316 by request).

SDD - Diagonal Decorative	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	6.3 lbs/ft. [2.9 kg]
Open Area:	17.9 in <sup>2</sup> /ft. [115 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P6-SMG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	59	64249	P6-SMG

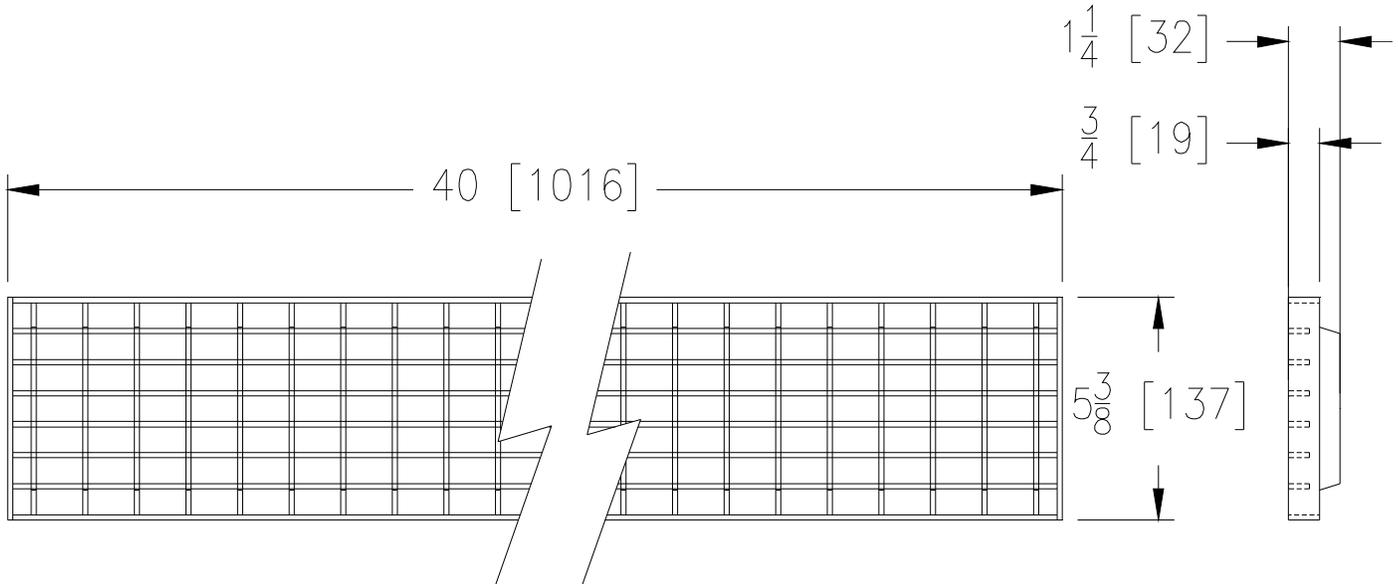

### SMG GRATE ENGINEERING SPECIFICATION: ZURN P6-SMG

40 [1016] X 5-3/8 [137] Stainless steel mesh screen grate weighing 3.9 lbs [1.8 kg] per linear foot. The grate has an open area of 47.0 in<sup>2</sup> [303 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium Duty and ASTM A351 Grade CF8 Type 304 (Grade CF8M Type 316 by request).

SMG - Mesh Screen	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	3.9 lbs/ft. [1.8 kg]
Open Area:	47.0 in <sup>2</sup> /ft. [303 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light Traffic
Slot Width/Hole Size:	1-1/8 [29]
ADA:	No
H-20:	No
FAA:	No




# P6-SOG

## 6 [152] Wide Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	60	64054	P6-SOG

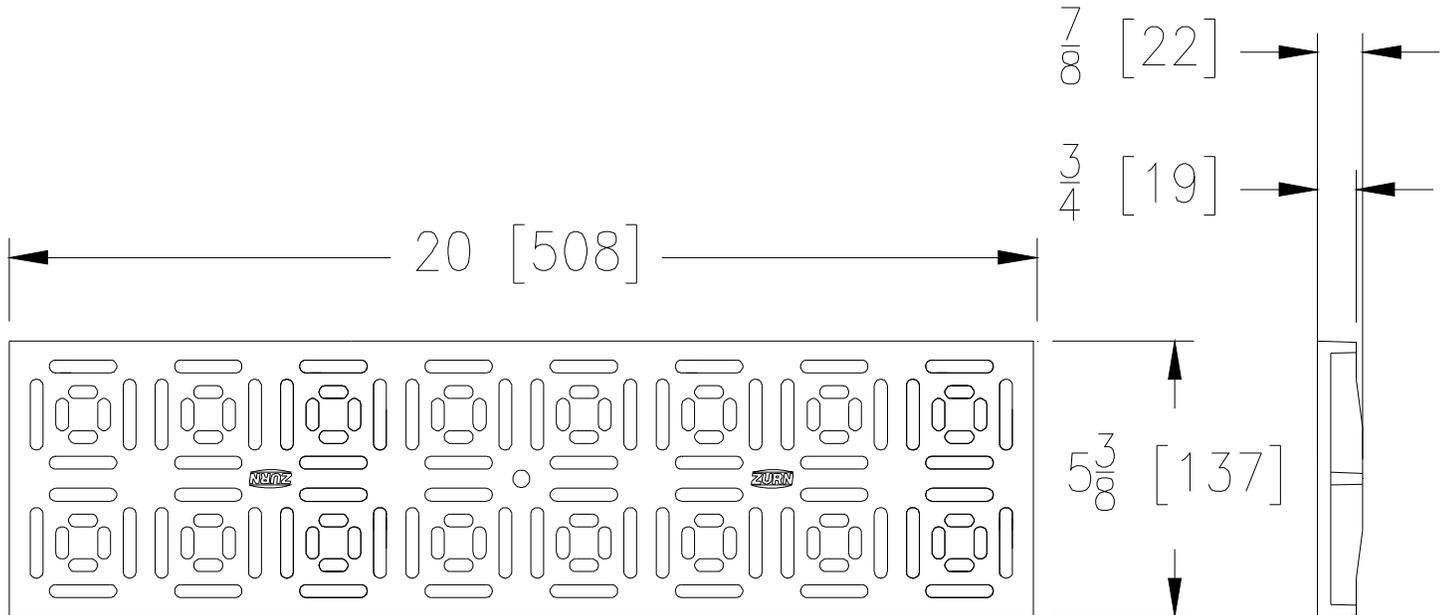

### SOG GRATE ENGINEERING SPECIFICATION: ZURN P6-SOG

20 [508] X 5-3/8 [137] Stainless steel ornamental grate weighing 5.6 lbs [2.5 kg] per linear foot. The grate has an open area of 16.9 in<sup>2</sup> [109 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty and ASTM A351 Grade CF8 Type 304 (Grade CF8M Type 316 by request).

SOG - Ornamental Grate	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	5.6 lbs/ft. [2.5 kg]
Open Area:	16.9 in <sup>2</sup> /ft. [109 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	No
H-20:	No
FAA:	No




# P6-SWG

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	61	94081	P6-SWG

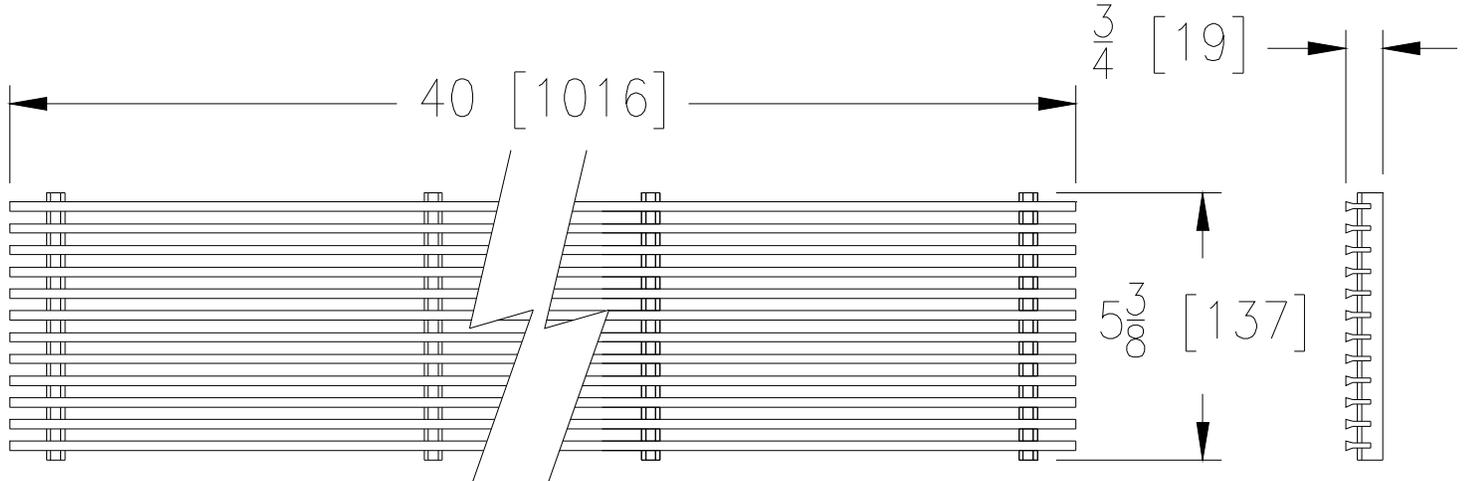

### SWG GRATE ENGINEERING SPECIFICATION: ZURN P6-SWG

40 [1016] X 5-3/8 [137] Stainless steel wire grate weighing 2.5 lbs [1.1 kg] per linear foot. The grate has an open area of 37.5 in<sup>2</sup> [242 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of A, ANSI rating of Light-Duty, ADA Compliant and ASTM specification A-240 Type 304.



SWG - Wire Grate	
Material:	Stainless Steel
DIN Rating:	Class A
Weight:	2.5 lbs/ft. [1.1 kg]
Open Area:	37.5 in <sup>2</sup> /ft. [242 cm <sup>2</sup> ]
ANSI Rating:	Light-Duty
Application:	Decorative Heel-Proof
Slot Width/Hole Size:	1/4 [6.4]
ADA:	Yes
H-20:	No
FAA:	No




# P886-FGF

## 6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	62	64355	P886-FGF

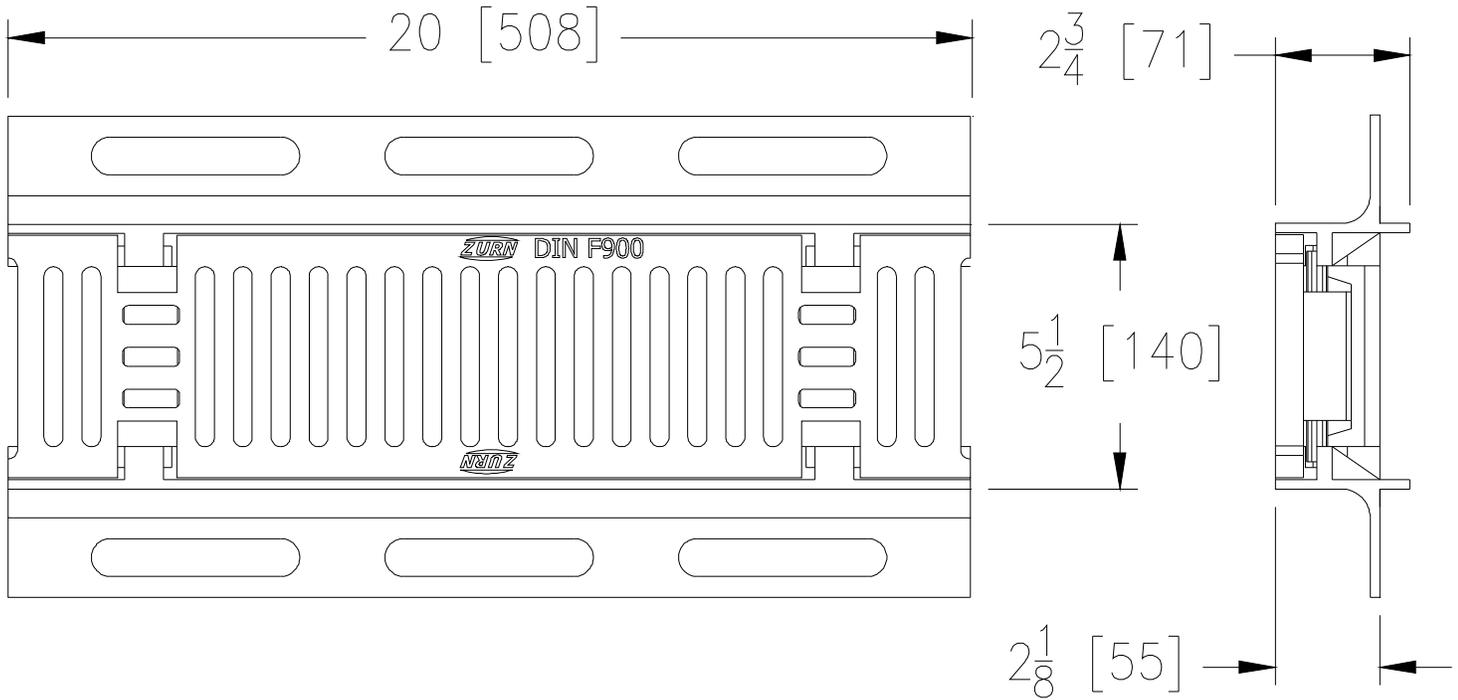

### FGF GRATE ENGINEERING SPECIFICATION: ZURN P886-FGF

20 [508] X 5-1/2 [140] Ductile Iron frame and grate weighing 18.7 lbs [8.5 kg] per linear foot. The grate has an open area of 20.5 in<sup>2</sup> [132 cm<sup>2</sup>] per linear foot. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated, and ASTM A536 Grade 80-55-06.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

FGF - Ductile Frame & Grate	
Material:	Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [8.5 kg]
Open Area:	20.5 in <sup>2</sup> /ft. [132 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Extra Heavy loads
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	Yes
FAA:	Yes




# P886-FGF-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	63	64355	P886-FGF-USA

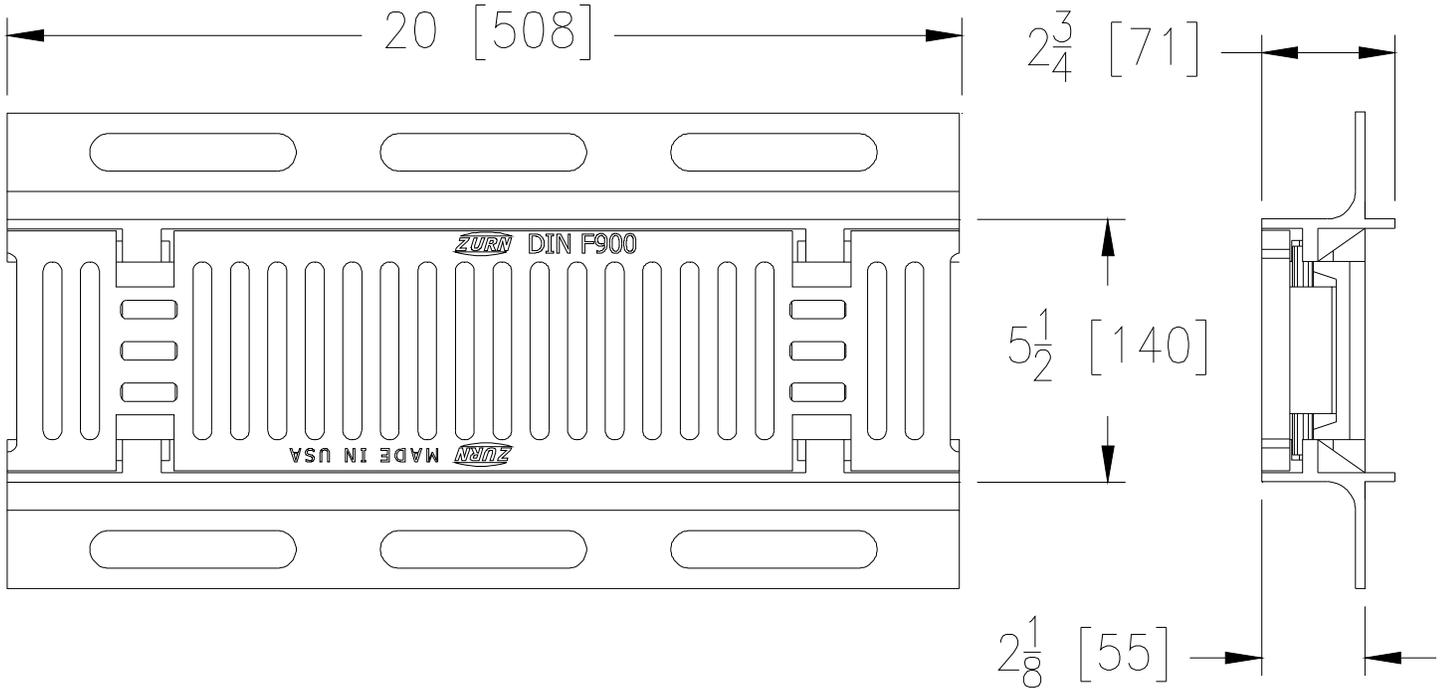

### FGF-USA GRATE ENGINEERING SPECIFICATION: ZURN P886-FGF-USA

20 [508] X 5-1/2 [140] Ductile Iron frame and grate weighing 18.7 lbs [8.5 KG] per linear foot. The grate has an open area of 20.5 in<sup>2</sup> [132 cm<sup>2</sup>] per linear foot. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated and ASTM A536 Grade 80-55-06. **\*\* Grate is shipped unpainted unless otherwise specified.**

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

FGF-USA - Ductile Frame & Grate	
Material:	Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [8.5 kg]
Open Area:	20.5 in <sup>2</sup> /ft. [132 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Extra Heavy loads
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	Yes
FAA:	Yes






**P886-GFG**  
6 [152] Wide Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	64	64355	P886-GFG

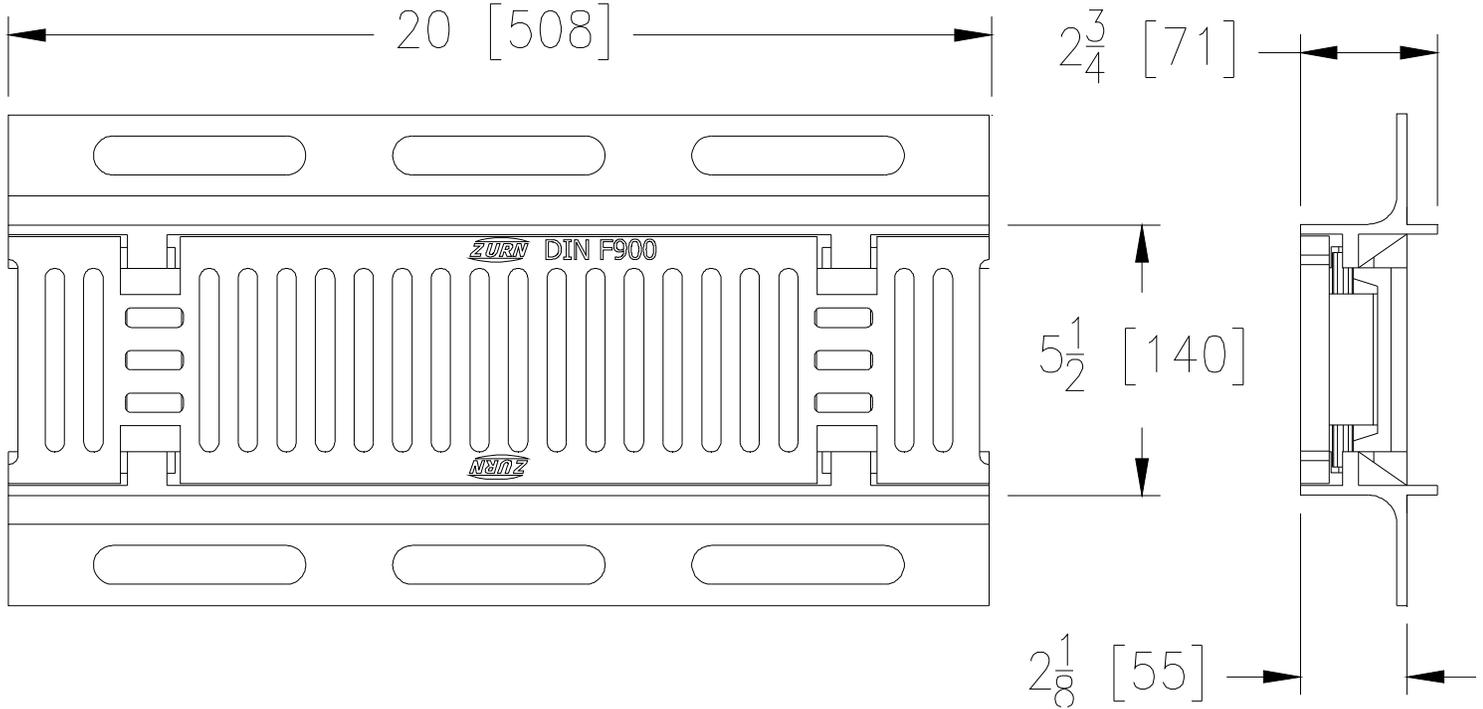

**GFG GRATE ENGINEERING SPECIFICATION: ZURN P886-GFG**

20 [508] X 5-1/2 [140] Galvanized Ductile Iron frame and grate weighing 18.7 lbs [8.5 kg] per linear foot. The grate has an open area of 20.5 in<sup>2</sup> [132 cm<sup>2</sup>] per linear foot. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated and ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTMA123.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

<b>GFG - Ductile Frame &amp; Grate</b>	
Material:	Galvanized Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [8.5 kg]
Open Area:	20.5 in <sup>2</sup> /ft. [132 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Extra Heavy Loads
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	Yes
FAA:	Yes




# P886-GFG-USA

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in[mm]), Area (in<sup>2</sup>[mm<sup>2</sup>], & Weight (lbs[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	65	64355	P886-GFG-USA

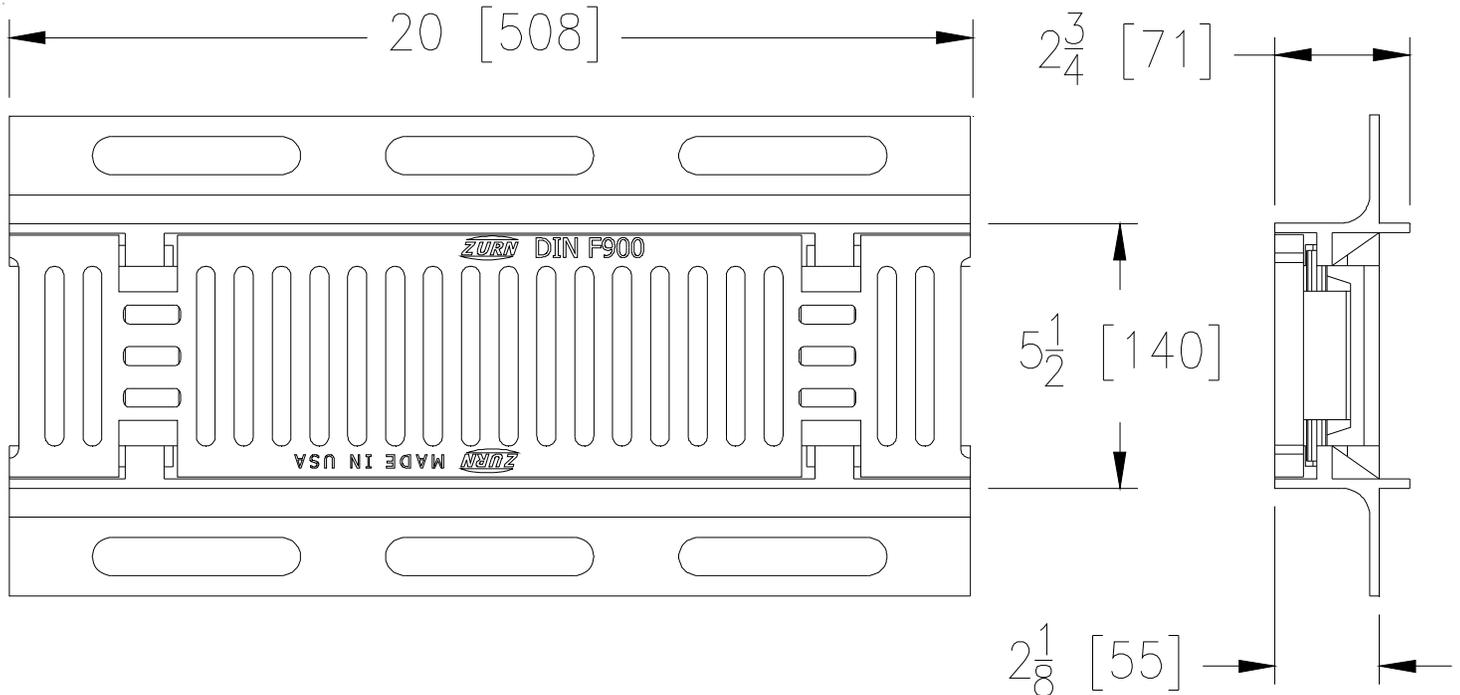

### GFG-USA GRATE ENGINEERING SPECIFICATION: ZURN P886-GFG-USA

20 [508] X 5-1/2 [140] Galvanized Ductile Iron frame and grate weighing 18.7 [8.5 kg] lbs per linear foot. The grate has an open area of 20.5 in<sup>2</sup> [132 cm<sup>2</sup>] per linear foot. Frame and grate conforms to DIN rating of F, ANSI rating of Special-Duty, H-20 and FAA load rated ASTM A536 Grade 80-55-06. Galvanized (hot dip) conforms to ASTM A123.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

GFG-USA - Ductile Frame & Grate	
Material:	Galvanized Ductile Iron
DIN Rating:	Class F
Weight:	18.7 lbs/ft. [8.5 kg]
Open Area:	20.5 in <sup>2</sup> /ft. [132 cm <sup>2</sup> ]
ANSI Rating:	Special-Duty
Application:	Extra Heavy loads
Slot Width/Hole Size:	3/8 [9.5]
ADA:	No
H-20:	Yes
FAA:	Yes






# P886-HDD

## 6 [152] Wide Domestic Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	66	94045	P886-HDD

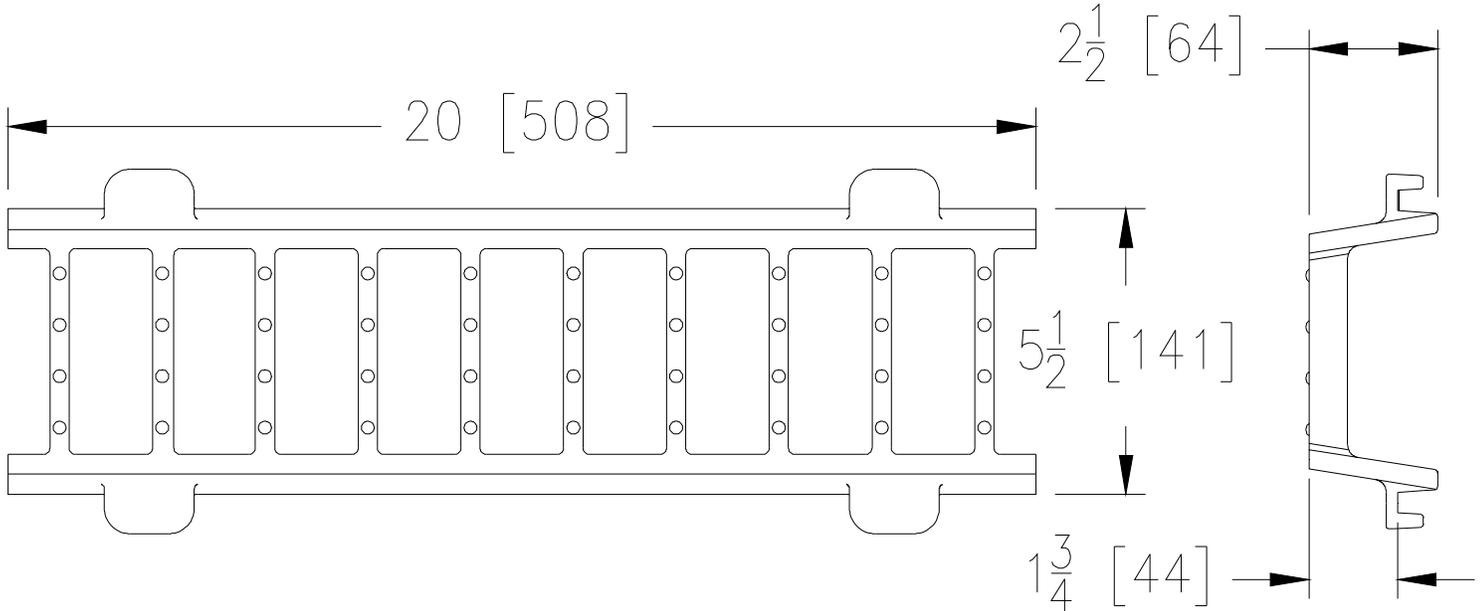

### HDD GRATE ENGINEERING SPECIFICATION: ZURN P886-HDD

20 [508] X 5-1/2 [140] Ductile Iron fixed grate weighing 7.7 lbs [3.5 kg] per linear foot. The grate has an open area of 38.8 in<sup>2</sup> [250 cm<sup>2</sup>] per linear foot. DIN rating of C, ANSI rating of Heavy-Duty, H-20/H-25 load rated and ASTM A536 Grade 80-55-06.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

HDD - Fixed Grate	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	7.7 lbs/ft. [3.5 kg]
Open Area:	38.8 in <sup>2</sup> /ft. [250 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Highways, Parking lots
Slot Width/Hole Size:	1-3/4 [44]
ADA:	No
H-20 / H-25:	Yes
FAA:	No






**P886-HR**  
**6 [152] Wide Domestic Grate**

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	67	94066	P886-HR

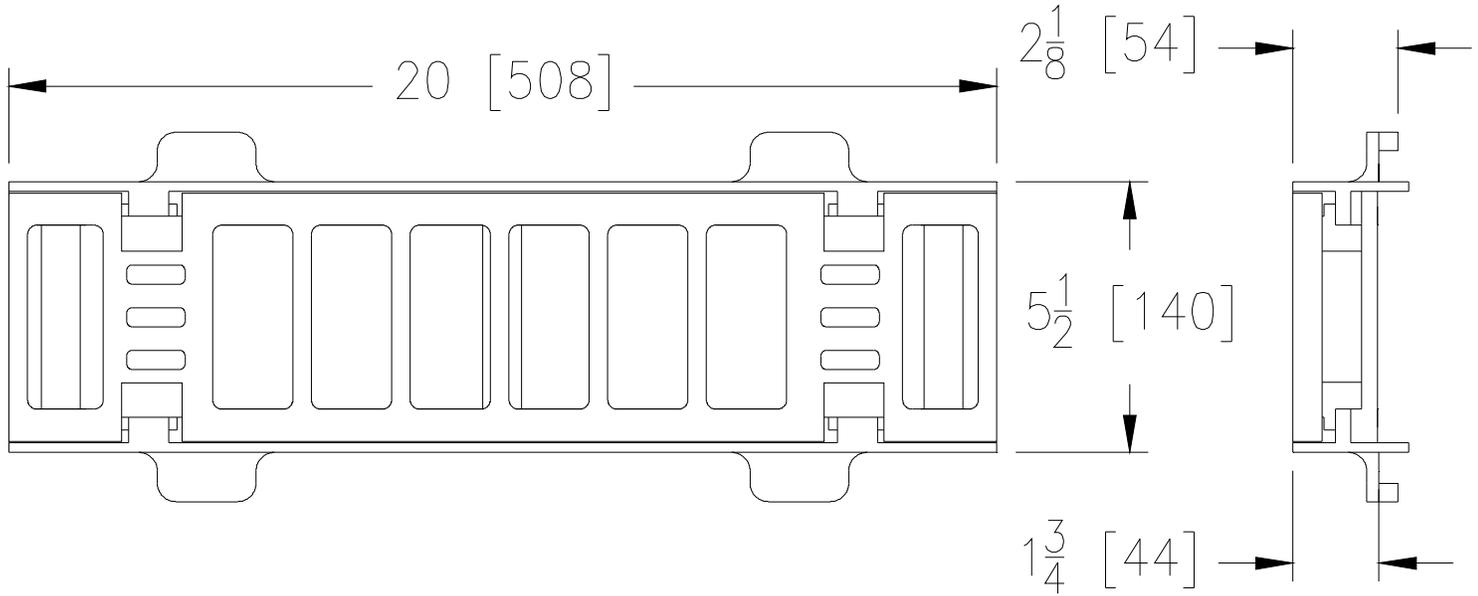

**HR GRATE ENGINEERING SPECIFICATION: ZURN P886-HR**

20 [508] X 5-1/2 [140] Ductile Iron removable frame and grate weighing 12.3 lbs [5.6 kg] per linear foot. The grate has an open area of 32.8 in<sup>2</sup> [212 cm<sup>2</sup>] per linear foot. Frame and grate conforms to DIN rating of C, ANSI rating of Heavy-Duty, H-20/H-25 load rated and ASTM A536 Grade 80-55-06.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM



<b>HR - Removable Grate</b>	
Material:	Ductile Iron
DIN Rating:	Class C
Weight:	12.3 lbs/ft. [5.6 kg]
Open Area:	32.8 in <sup>2</sup> /ft. [212 cm <sup>2</sup> ]
ANSI Rating:	Heavy-Duty
Application:	Highways, Parking lots
Slot Width/Hole Size:	1-5/8 [41]
ADA:	No
H-20 / H-25:	Yes
FAA:	No




# P886-PVS

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	68	94287	P886-PVS

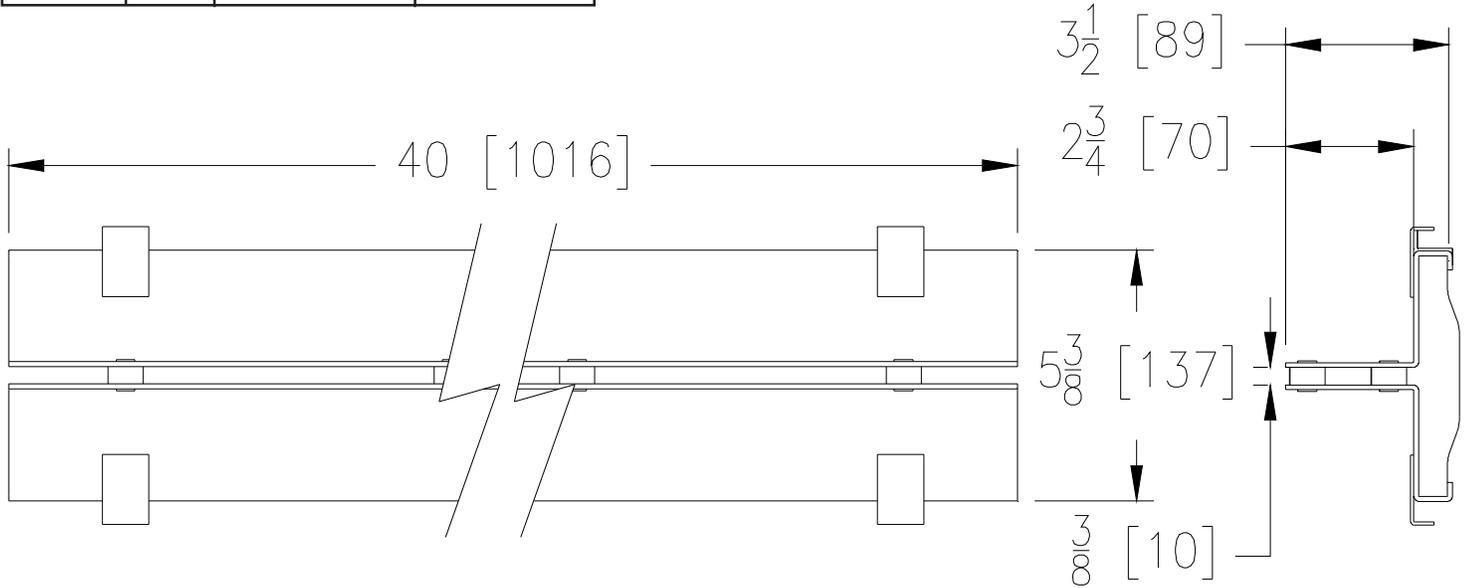

### PVS GRATE ENGINEERING SPECIFICATION: ZURN P886-PVS

40 [1016] X 5-3/8" [137 mm] Fabricated steel paver slot grate weighing 4.6 lbs [2.1 kg] per linear foot. The grate has an open area of 6.0 in<sup>2</sup> [39 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant and ASTM A36.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM

PVS - Paver Slot Grate	
Material: Carbon Steel	
DIN Rating: Class B	
Weight: 4.6 lbs/ft. [2.1 kg]	
Open Area: 6.0 in <sup>2</sup> /ft. [39 cm <sup>2</sup> ]	
ANSI Rating: Medium-Duty	
Application: Sidewalks, Light Traffic	
Slot Width/Hole Size: 1/2 [12.7]	
ADA:	Yes
H-20:	No
FAA:	No






# P886-PVSG

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check ✓	Item No.	Part Number	Item I.D.
	69	94287	P886-PVSG

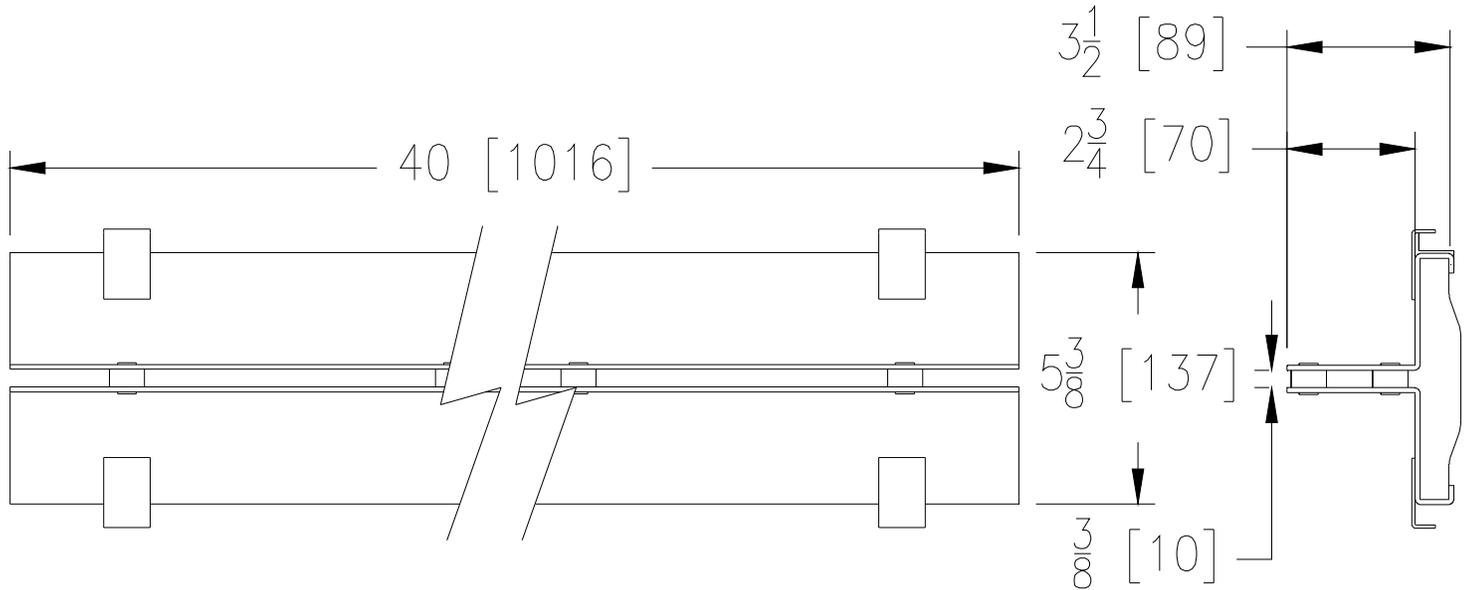

### PVSG GRATE ENGINEERING SPECIFICATION: ZURN P886-PVSG

40 [1016] X 5-3/8 [137] Fabricated galvanized steel paver slot grate weighing 4.6 lbs [2.1 kg] per linear foot. The grate has an open area of 6.0 in<sup>2</sup> [39 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant and ASTM A36. Galvanized (hot dip) conforms to ASTM A123.

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM



PVSG - Paver Slot Grate	
Material:	Galvanized Steel
DIN Rating:	Class B
Weight:	4.6 lbs/ft. [2.1 kg]
Open Area:	6.0 in <sup>2</sup> /ft. [39 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light-Traffic
Slot Width/Hole Size:	1/2 [12.7]
ADA:	Yes
H-20:	No
FAA:	No




# P886-PVSS

## 6 [152] Wide Domestic Decorative Grate

Dimensional Data (Imperial and [Metric]) are subject to manufacturing tolerances and change without notice. Linear (in/[mm]), Area (in<sup>2</sup>/[mm<sup>2</sup>], & Weight (lbs/[kg]).

[Back to Index](#)

Please Check	Item No.	Part Number	Item I.D.
✓	70	94287	P886-PVSS

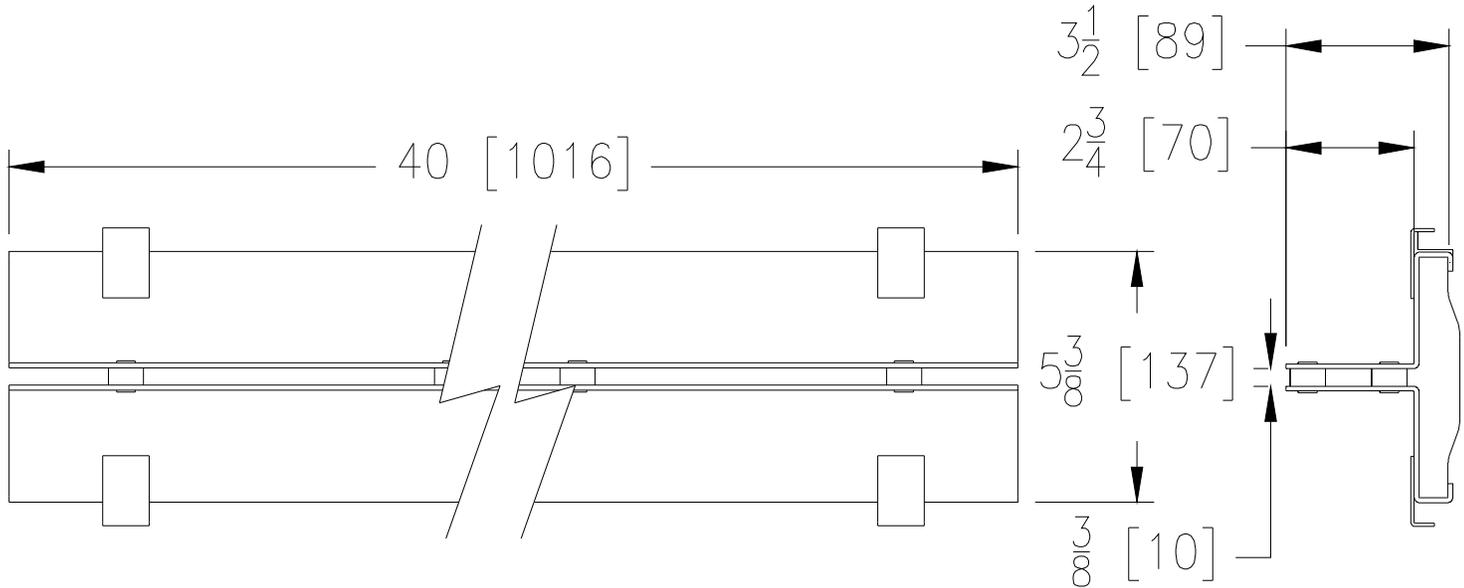

### PVSS GRATE ENGINEERING SPECIFICATION: ZURN P886-PVSS

40 [1016] X 5-3/8 [137] Fabricated stainless steel paver slot grate weighing 4.7 lbs [2.1 kg] per linear foot. The grate has an open area of 6.0 in<sup>2</sup> [39 cm<sup>2</sup>] per linear foot. Grate conforms to DIN rating of B, ANSI rating of Medium-Duty, ADA compliant and ASTM A-240 Type 304 (316 by request).

\*ONLY AVAILABLE WITH Z886 TRENCH DRAIN SYSTEM



PVSS - Paver Slot Grate	
Material:	Stainless Steel
DIN Rating:	Class B
Weight:	4.7 lbs/ft. [2.1 kg]
Open Area:	6.0 in <sup>2</sup> /ft. [39 cm <sup>2</sup> ]
ANSI Rating:	Medium-Duty
Application:	Sidewalks, Light-Traffic
Slot Width/Hole Size:	1/2 [12.7]
ADA:	Yes
H-20:	No
FAA:	No