


SELECT SERIES POWER PEDESTALS

FEATURES AND BENEFITS


- CSA Type 3R rated enclosure
- Galvanized steel construction
- Bolt together design
- WIA 45° angled while in use bracket standard
- Wet location lexan covers
- Industry standard ASA-61 grey industrial powder coat finish
- Standard templates and anchor bolts supplied

OPTIONS AVAILABLE (Consult Factory)

- Stainless steel or aluminum construction
- Custom height
- Custom powder coat finish
- Custom recp. & breaker combinations
- WIC while in use cover
- IPLC - Intelligent parking lot controllers
- GFI & 20 Amp receptacles
- HB hidden baseplate standard
- EB external baseplate available
- DB Direct burial spade

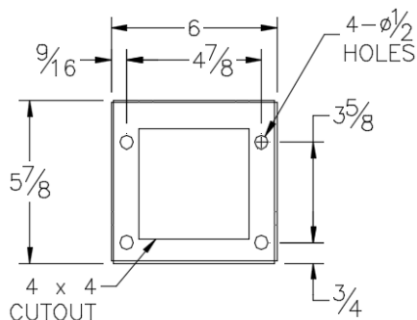

HIDDEN BASEPLATE
(Standard)

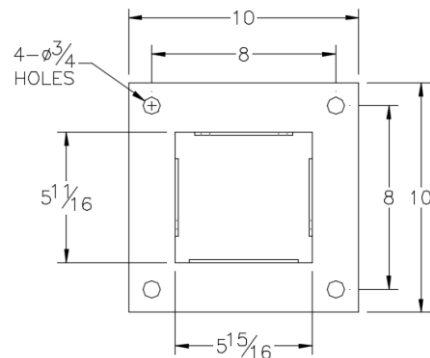

EXTERNAL BASEPLATE
(Add Suffix -EB to Part #)



SELECT SERIES POWER PEDESTALS

SELECT SERIES

TECHNICAL INFORMATION

- 12 Ga. Galvanized steel baseplate
- 6 3/16"W x 5 7/8"D x 30 1/2"H 12 Ga. Galvanized steel body
- 1 Ground lug type A (Refer to Pg. 9)

Model #	Receptacles		Breakers	
	Qty.	Type	Qty.	Type
SEL-AP3-WIA	2	15A Duplex	0	None
SEL-AP4-WIA	1	15A Duplex	0	None
SEL-AP5-WIA	3	15A Duplex	0	None
SEL-AP6-WIA	4	15A Duplex	0	None



SELECT SERIES SHORT

TECHNICAL INFORMATION

- 12 Ga. Galvanized steel baseplate
- 6 3/16" x 5 7/8" x 12"H 12 Ga. Galvanized steel body
- 1 Ground lug type A (Refer to Pg. 9)

Model #	Receptacles		Breakers	
	Qty.	Type	Qty.	Type
SEL-AP3-S,WIA	2	15A Duplex	0	None
SEL-AP4-S,WIA	1	15A Duplex	0	None

