


4" DIAL PRESSURE GAUGE LOWER MOUNT

APPLICATION:


General purpose gauge, for potable water pumps & systems, these gauges are suitable for compressors, hydraulic presses, machinery, pneumatic equipment and motors, for most commercial air, water and steam services. To be used with fluid medium which does not clog connection or corrode copper alloy.

CERTIFICATION:

- NSF/ANSI Standard 372 Certified

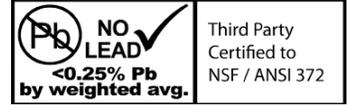

GAUGE SPECIFICATIONS	
Standard	ASME B40.1
Dial	4" (102mm) white aluminum dial
Case	Steel
Lens	Acrylic
Ring (Bezel)	N/A
Connection	Brass / No Lead Brass
Bourdon Tube	Brass
Fill Liquid	N/A
Movement	Brass
Pointer	Aluminum (Anodized Black)
Welding	Tin Solder
Working Pressure	Maximum 75% of Full Scale Value (F.S.V.)
Ambient Op. Temp.	-40°F to 140°F (-40°C to 60°C)
Media Op. Temp.	Max. 140°F (60°C)
Accuracy	+/- 2.5%
Enclosure Rating	General Purpose

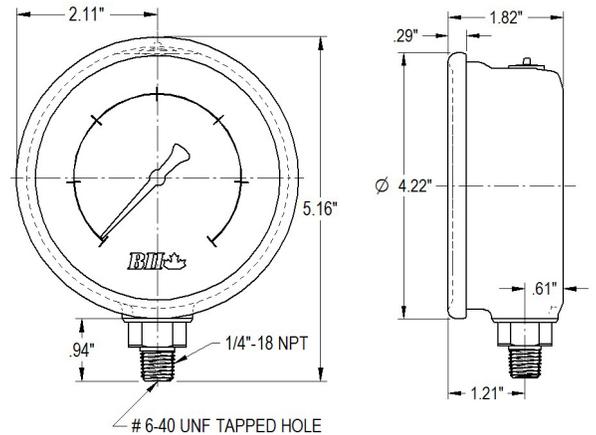

DIMENSIONS				
Part No.	Connection	Range	Increments	Weight
		PSI		grams
PG40-30NL	1/4" MPT	0-30	0.5	290
PG40-60NL	1/4" MPT	0-60	1	290
PG40-100NL	1/4" MPT	0-100	1	290
PG40-160NL	1/4" MPT	0-160	2	290
PG40-200NL	1/4" MPT	0-200	2	290
PG40-300NL	1/4" MPT	0-300	5	290



25 Whaley Avenue, PO Box 310, Milverton, ON CANADA N0K 1M0
Tel: 800-561-3164

boshart.com ♦ blog.boshart.com