


# PAR36



## DESCRIPTION

The Brilliance PAR36 lamp is designed to fit in standard low voltage PAR36 fixtures and offers a long lamp life. These LEDs are thermally engineered to operate in enclosed fixtures and provide added security by automatically cooling down and reducing lumen output when exposed to extreme heat, such as air temperatures above 125°F. There is no color shift when lumen output is reduced. Dimmable with Brilliance Dimmer and most magnetic transformers.

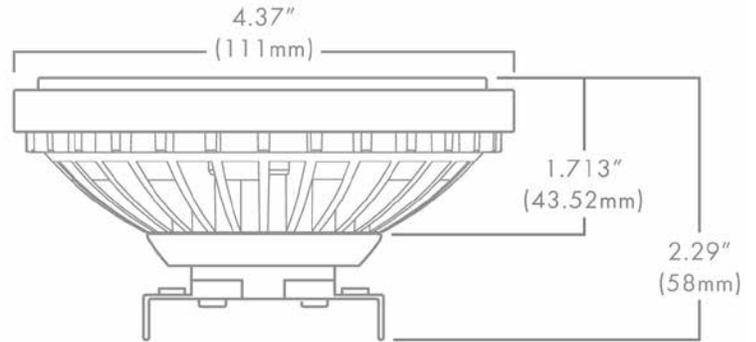

## PAR36 FEATURES

- Earth tone colored housing
- Dimmable with Brilliance Dimmer and most magnetic transformers
- Enhanced ESD (Electro-Static Discharge) protection (IEC-61000-4-2)
- Heat overload protection technology
- Fully potted PC board
- UL Certified E360351

Part Number: **PAR36-X-XXXX-XXX**



## PAR36 SPECS

Wattage	<b>4, 7, 11, 15</b>		
Lumens	<b>2700K</b>	<b>3000K</b>	<b>5700K</b>
4W	435	-	-
7W	675	700	-
11W	900	950	-
15W	1430	1530	1650
Beam Spread†	<b>15°, 30°, 60°, 120°</b>		
Kelvin Temperature	<b>2700, 3000, 5700</b>		
Color	<b>Amber (11W, 30° only)</b>		
Operating Range	<b>8-25 VAC/DC</b>		
Replaces	<b>20W, 35W, 50W Halogen</b>		
CRI	<b>85</b>		
IP	<b>68</b>		
Lamp Life (hours)	<b>50,000</b>		
Warranty (years)	<b>5</b>		



† Select Beam Spreads Available in Stock. Call 800-867-2108 for availability.