



- Model 6562 – Liquid Soap **Bradex**[®]
- Model 6562-73 – Foam Soap **Bradex**[®]

- Tank Type Vertical
- Surface-Mounted
- ADA Compliant

Product Materials

Body: 20 gauge stainless steel with exposed surfaces in architectural satin finish.
Back: 20 gauge stainless steel; heliarc welded to the body.
Wall Plate: stainless steel.
Liquid Soap Dispenser: chrome-plated brass housing with ABS plastic mechanism.
Foam Soap Dispenser: chrome-plated ABS mechanism.

Capacity

40-oz. liquid or bulk foam soap.

Operation

Push-in valve dispenses measured amount of vegetable or coconut oil liquid soaps, synthetic detergents, antiseptic solutions or foam soap with less than 5 lbs. of force. Sight gauge indicates refill time. Locked filler top opens with special key provided.

- Bradley liquid soap valves operate best with any vegetable oil or coconut oil hand soap having a 10–15% soap concentration.
- Bradley foam soap valves work with majority of bulk foam soap.

Installation

Verify all rough-in dimensions prior to installation. Secure separate mounting bracket to wall. Slide dispenser into place and secure locking screw through filler hole.

Guide Specification

Surface-mounted soap dispenser shall be fabricated of 20 gauge satin finish stainless steel. Dispenser shall have completely concealed mounting, vandal-resistant filler hole cover and sight gauge. Push-in corrosion-resistant soap valve. Capacity: 40-oz. liquid or bulk foam soap. Requires less than 5 lbs. of force to dispense soap.

Overall dimensions: 4-13/16"W x 8-1/4"H x 2-7/8"D.

Service Kits

Liquid Soap Valve - P15-408
Foam Soap Valve - P15-510




ADA Compliant

- Consult local and national accessibility codes for proper installation guidelines.
- Conformity and compliance to local and national codes is the responsibility of the installer.

Orders composed of products indicated as **Bradex**[®] will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.



Dimensions

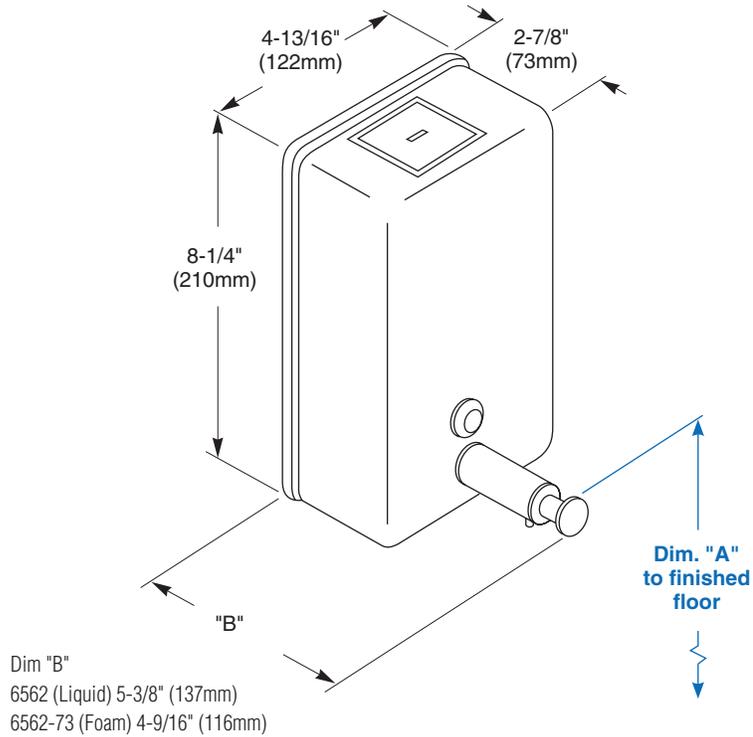

| Dim. "A" Key Surface: | For Dim. "A" | Top of Unit | Bottom of Unit |
|-----------------------------------|---|---------------|----------------|
| Push button top to finished floor | 40" (1016mm) | 46¾" (1187mm) | 38½" (978mm) |
| | 38" (965mm) | 44¾" (1137mm) | 36½" (927mm) |
| | 36" (914mm) | 42¾" (1086mm) | 34½" (876mm) |
| | 34" (864mm) | 40¾" (1035mm) | 32½" (826mm) |
| Rough wall opening: | | | |
| Surface Mount: | No rough wall opening, see overall dimensions | | |

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.