


# Architectural Wall Pack

30W | 4000K | 120-277V



High-end style with super bright, energy efficient LEDs  
Ideal for building entrances, multi-use facilities, apartment buildings,  
institutions, schools, stairways and loading docks

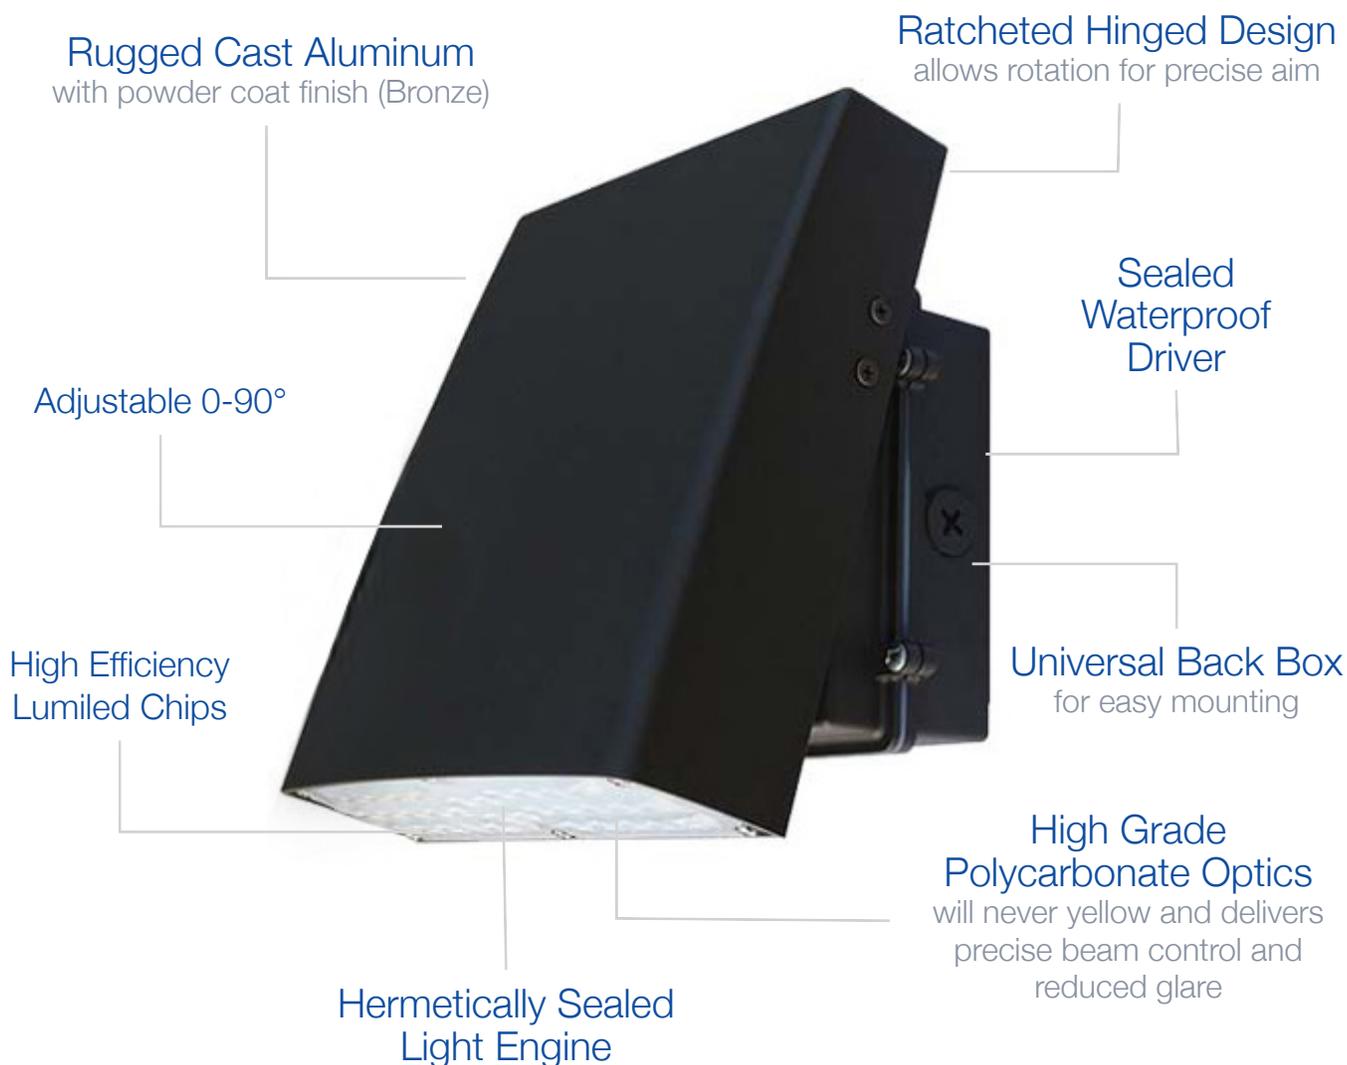

## TECHNICAL DATA



### LIGHT SPECIFICATIONS

|            |            |
|------------|------------|
| Lumens     | 3,239 lm   |
| Efficacy   | 116.4 lm/W |
| CCT        | 4000K      |
| CRI        | 83.3       |
| Beam Angle | 90 x 120   |
| L70 Life   | 50,000 hrs |
| Dimmable   | No         |
| Warranty   | 10-year    |

### APPROVALS AND LISTINGS

|     |          |
|-----|----------|
| cUL | E482965  |
| DLC | PQ6BEWE7 |

### ELECTRICAL

|                |             |
|----------------|-------------|
| Wattage        | 30W         |
| Voltage        | 120-277V    |
| Power Factor   | 0.9         |
| THD            | 11.73%      |
| Operating Temp | -40 to 40°C |

### CONSTRUCTION


|            |                    |
|------------|--------------------|
| Housing    | Aluminum           |
| Finish     | Multi-coat, powder |
| Colour     | Bronze             |
| IP Rating  | IP65               |
| Weight     | 4.3 lbs            |
| Carton Qty | 4                  |

### ILLUMINANCE AT A DISTANCE


|         | Center Beam fc | Beam Width |          |
|---------|----------------|------------|----------|
| 17.0ft  | 14.20 fc       | 30.0 ft    | 37.1 ft  |
| 34.0ft  | 3.55 fc        | 60.1 ft    | 74.2 ft  |
| 51.0ft  | 1.58 fc        | 90.1 ft    | 111.3 ft |
| 68.0ft  | 0.89 fc        | 120.2 ft   | 148.4 ft |
| 85.0ft  | 0.57 fc        | 150.2 ft   | 185.5 ft |
| 102.0ft | 0.39 fc        | 180.3 ft   | 222.5 ft |

■ Vert. Spread: 82.9°  
■ Horiz. Spread: 95.0°

### ISOCANDELA PLOT

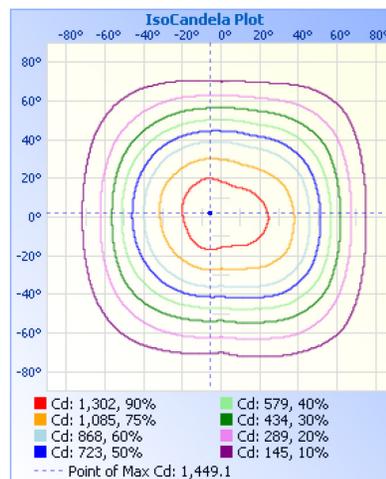

### DIMENSIONS

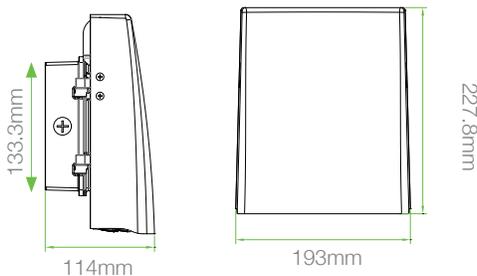

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | [ordersbc@csc-led.com](mailto:ordersbc@csc-led.com)