

200W High Bay, 120-347V

HB7

NEW HB7 series High Bay

Ideal for warehouses, factories, and workshops



Long life, elevated driver
for cooler operation

2m power cord
0-10V dimmable

Polyester powder
coat finish (Black)



High grade aluminum body
for superior heat dissipation

Shatter-proof
polycarbonate lens

110° beam angle

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	26,125 lm
Efficacy	133.86 lm/W
CCT	4000K
CRI	82.6
L70 Life	50,000 hrs
Dimmable	0-10V
Warranty	5-year

APPROVALS AND LISTINGS


cUL	E482965
DLC Premium	PLG55HWBKRNO

ILLUMINANCE AT A DISTANCE

	Center Beam Fc	Beam Width	
17.0ft	31.7 fc	52.6 ft	53.1 ft
34.0ft	7.93 fc	105.3 ft	106.2 ft
51.0ft	3.53 fc	157.9 ft	159.4 ft
68.0ft	1.98 fc	210.6 ft	212.5 ft
85.0ft	1.27 fc	263.2 ft	265.6 ft
102.0ft	0.88 fc	315.9 ft	318.7 ft

■ Vert. Spread: 114.3°
■ Horiz. Spread: 114.8°

ISOCANDELA PLOT

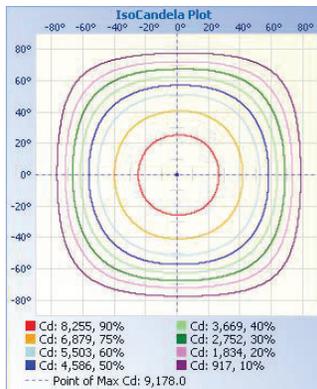

ELECTRICAL

Wattage	200W
Voltage	120-347V
Power factor	0.92
THD	14.11%
Operating temp	-30 to 50°C

CONSTRUCTION

Housing	Aluminum alloy
Finish	Black
IP rating	IP65
Weight	10.1 lbs
Carton qty	1
Carton weight	12.8 lbs
Carton dimensions	42 x 42 x 20.5 cm

DIMENSIONS

