

110W Linear High Bay



Suitable for manufacturing, shops and warehouse applications

Slim, compact design. 120-347V

Low glare frosted lens included
(can be removed)

Steel housing with white
epoxy powder coat finish



120-347V
driver

Chain mounts and v-hooks included

Optional dimmable motion sensor ordered separately

Optional wire guard ordered separately

Optional bracket ordered separately

TECHNICAL DATA




LIGHT SPECIFICATIONS

Lumens	15,527 lm
Efficacy	141.06 lm/W
CCT	4000K
CRI	81
Beam angle	100°
L70 Life	50,000
Dimmable	0-10V
Warranty	5-year


APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLENEOII6AA0
LED CHIP	LUMILEDS 2835

ISOCANDELA PLOT

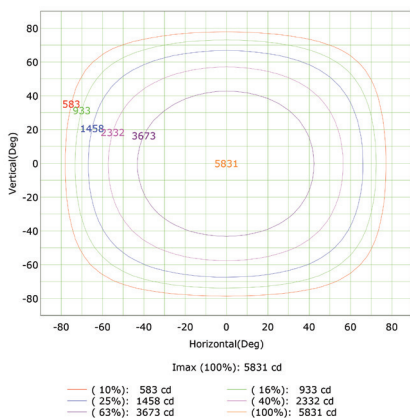

ILLUMINANCE AT A DISTANCE

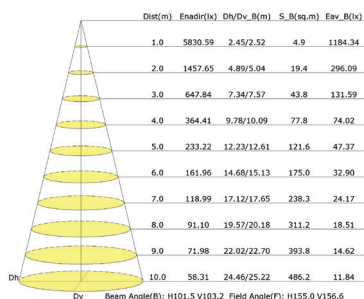


ELECTRICAL

Wattage	110W
Voltage	120-347V
Power factor	0.97
THD	11.62%
Operating temp	-40 to 50°C

CONSTRUCTION

Housing	Steel
Finish	White
IP Rating	IP40 (damp location)
Weight	3.2 lbs
Carton qty	2

DIMENSIONS

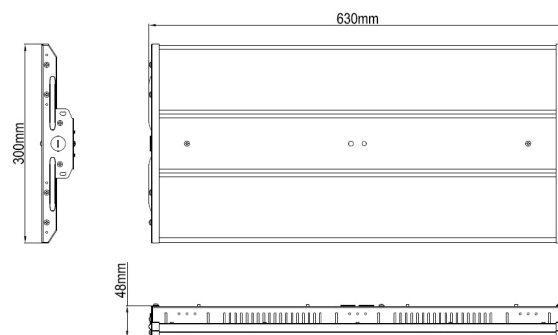

ACCESSORIES

Bracket	LHB-BRACKET-SM
Motion Sensor	YM2502
Motion Sensor (Dimmable 120-277V)	MC054V-RC-D
Wire Guard	LHB-100-165-WG



LHB-BRACKET-SM

Western Canada Warehouse: 121-1647 Broadway Street, Port Coquitlam, BC V3C 6P8 | ordersbc@csc-led.com