

750W Sports Stadium Light

Suitable for indoor/outdoor recreational facilities,
high mast applications, dock yards and more



Optional visor: SP01-VISOR-B, ordered separately

Optional laser sighting for precision aiming



TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	101,915 lm
Efficacy	145.83 lm/W
CCT	5000K
CRI	70
L70 Life	100,000 hrs
Dimmable	0-10V
Warranty	5-year

APPROVALS AND LISTINGS

cUL	E482965
DLC Premium	PLXX97882YBV

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	2,050 fc	5.1 ft	5.2 ft
34.0ft	512 fc	10.2 ft	10.4 ft
51.0ft	228 fc	15.4 ft	15.6 ft
68.0ft	128 fc	20.5 ft	20.8 ft
85.0ft	82.0 fc	25.6 ft	26.0 ft
102.0ft	56.9 fc	30.7 ft	31.2 ft

■ Vert. Spread: 17.1°
■ Horiz. Spread: 17.4°


ELECTRICAL

Wattage	750W
Voltage	277-480V
Power factor	0.90
THD	15%
Operating temp	-40 to 45°C

CONSTRUCTION

Housing	Aluminum
Finish	Black
IP rating	IP66
Weight	71.65 lbs
Carton qty	1

DIMENSIONS

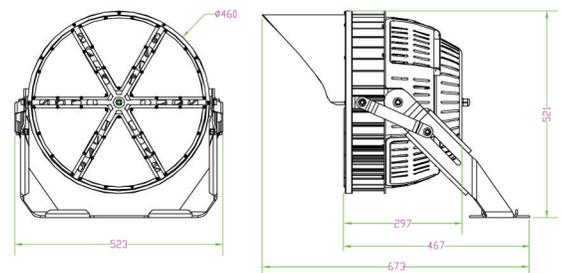

ISOCANDELA PLOT

