


Product Catalog and Dimensional Data

Spring 2018



Centrotherm

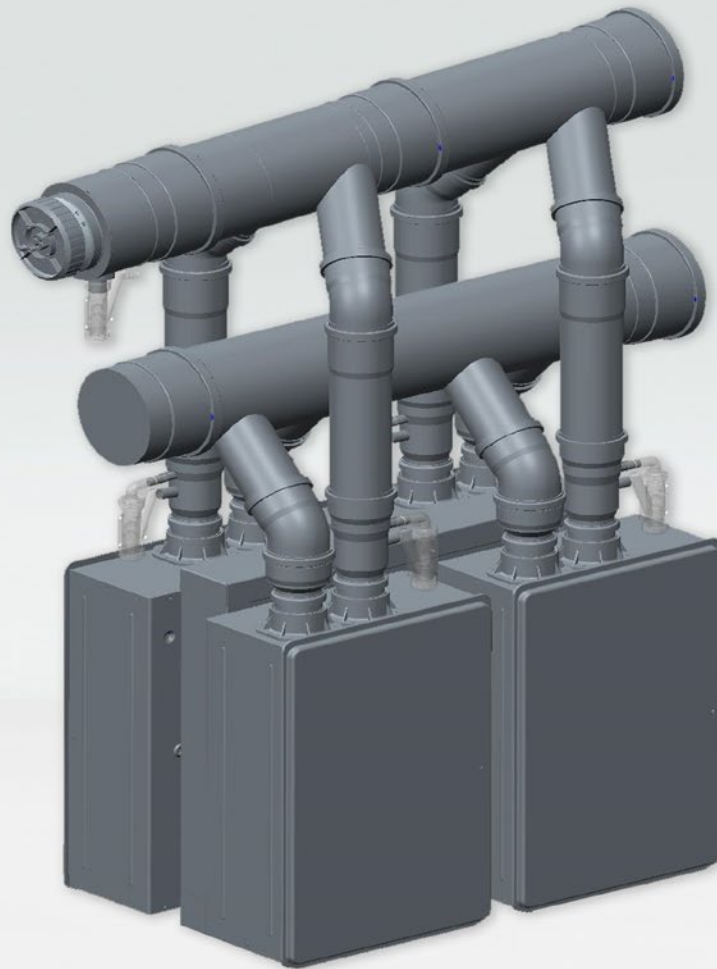

InnoFlue® is the First
polymeric vent system
listed to ULC-S636 and
UL-1738 in North America



About Centrotherm



Centrotherm
solutions beyond

Worldwide

Established in 2009 for the purpose of introducing Polypropylene Vent Systems to the North American market, **Centrotherm Eco Systems** is a member of the Ubbink Centrotherm Group.

Ubbink was founded in the Netherlands in 1896. In 1976, Centrotherm Systemtechnik was established in Brilon, Germany, and in 1998, CENTROTEC Sustainable AG was formed as its parent holding company. Ubbink was acquired by Centrotec Sustainable AG in 2000 and combined with Centrotherm to form the Ubbink-Centrotherm Group. The UCG is the building products division of CENTROTEC, one of Europe's leading manufacturers of a variety of sustainable building solutions. <http://centrotec.de> Today, the UCG has subsidiaries in UK, FR, IT, CN, NE, DE, BE.

Now, **Centrotherm Eco Systems** produces its **InnoFlue®** Vent Systems, **BlitzFlex®** air-intake systems, and accessories based on a wealth of technical know-how and experience

accumulated over time. Field proven for over 20 years, it has been installed and is performing successfully in millions of homes in the North American and European markets today.

Centrotherm Eco Systems supplies its **InnoFlue®** Vent Systems, **BlitzFlex®** air-intake systems, and accessories to heating professionals through heating and plumbing wholesalers, as well as commercial spec. representatives, and OEMs.

Centrotherm Eco Systems also designs, produces, and delivers internal equipment components to many OEMs of high efficiency boilers, tankless water heaters, and furnaces.

The following catalog pages describe our standard products available today.

We are looking forward to your feedback and input to help keep our products on the cutting edge of technology, simplicity, and ease of installation.



InnoFlue® is the First polymeric vent system listed to ULC-S636 and UL-1738 in North America



Centrotherm Eco Systems Albany, New York



Centrotherm Systemtechnik GmbH Brilon, Germany

Since 2009, a customer focused approach has positioned **Centrotherm** as the most trusted name in vent manufacturing.

This relentless attention to customer needs has driven **Centrotherm** to be the innovation and safety leader in flue gas venting and combustion air.

InnoFlue polypropylene vent systems and the recent addition of **BlitzFlex**® air-intake systems combine to create a full venting solution for residential and commercial applications.

Centrotherm is committed to venting safely through the expansion of education, adoption, and regulation.

Centrotherm has set a tradition of groundbreaking industry firsts, including:

- ULC-S636 and UL-1738 listed vent system
- Vent manufacturer to earn ISO 9001:2015
- North American extrusion of polypropylene vent systems
- Dedicated air-intake systems
- 1/4" per foot pitch
- 10' effective vent lengths
- Commercial diameter vent products

Centrotherm is the right choice for wholesale distributors, engineers, OEMs, and installers.

For more information about **Centrotherm Eco Systems**, visit www.centrotherm.us.com

Centrotherm: Solutions Beyond



Table of contents

About		
Centrotherm	2	
Worldwide	2	
InnoFlue®	6	
The intelligent alternative to PVC & CPVC	6	
Why InnoFlue®?	7	
Applications and Limitations	8	
BlitzFlex® Air-Intake Systems	9	
Typical configurations	10	
BlitzFlex®	11	
BlitzKits	11	
Residential Single Wall	12	
Typical configurations	13	
Appliance Adaptors	14	
Appliance Adaptor for Coupler Style Flue Collars	14	
Appliance Adaptor for Flue Collar with Hose Clamp	14	
Appliance Adaptor Tapered SS to InnoFlue®	14	
Appliance Adaptor Straight SS to InnoFlue®	14	
Appliance Adaptors 101mm to PPs	15	
Custom Appliance Adaptors	15	
Increases & Reducers	15	
Eccentric Increaser	15	
Centric Increaser	15	
3"/2" Reducer	16	
Reducers	16	
Test Ports	16	
Test Ports	16	
Vent Lengths	17	
Rigid Vent Length	17	
Base Supports	17	
Base Support	17	
B-Vent Base Support Bracket	18	
Elbows and Tees	18	
15° Elbow	18	
30° Elbow	18	
45° Elbow	18	
45° Elbow Long	19	
87° Elbow Long	19	
87° Elbow	19	
Tee	19	
Tee Cap	20	
Condensate Management	20	
Horizontal Drain Tee	20	
Tee Cap with Drain	20	
Universal Ball Valve Siphon	21	
Residential Single Wall Vent Kits	21	
Horizontal Vent Kit	21	
Terminations	22	
Chimney Cover PPs-UV	22	
Chimney Cover SS W/PPs-UV End Pipe	22	
Low Profile Wall Termination	22	
Universal B-Vent Cap	23	
Termination Tee	23	
End Pipe PPs-UV	23	
Vent Lengths PPs-UV	24	
45° Elbow Long PPs-UV	24	
45° Elbow PPs-UV	24	
87° Elbow Long PPs-UV	24	
87° Elbow PPs-UV	24	
PPs to PVC Termination Kit	25	
Accessories	25	
Bird Screen PPs-UV	25	
Bird Screen SS	25	
2", 3", 4" and 5" Spacers	25	
Flue Clamp	26	
Support Clamp	26	
Wall Plate Square (Plastic)	26	
Connector Ring	26	
EPDM Gaskets	27	
B-Vent Gasket	27	
Centrocerin	27	
Flex	28	
Typical configurations	29	
Flex Vent Lengths	30	
2" Flex	30	
3" and 4" Flex	30	
Base Supports	31	
Base Support	31	
B-Vent Base Support Bracket	31	
Couplers and Accessories	31	
2", 3", and 4" Spacers	31	
SW to Flex Coupler	31	
2" Flex to SW Coupler	32	
3" and 4" Flex to SW Coupler	32	
2" Flex to Flex Coupler	32	
3" and 4" Flex to Flex Coupler	32	
B-Vent Flex and Component Kits	33	
2" B-Vent Kit	33	
3" and 4" B-Vent Kit	33	
2" Flex Component B-Vent Kit	33	
3" and 4" Flex Component B-Vent Kit	34	
Chimney Flex and Component Kits	34	
2" Chimney Kit	34	
3" and 4" Chimney Kit	35	
2" Flex Component Chimney Kit	35	
3" and 4" Flex Component Chimney Kit	35	

Terminations	35	Increasesers & Reducers	49
Chimney Cover PPs-UV	35	Centric Increaser	49
Custom Chimney Cover PPs-UV	35	Eccentric Increaser	49
2' Flex End Pipe	36	Reducer	50
3' and 4' Flex End Pipe	36	Tapered Reducer	49
Universal B-Vent Cap	36	Test Ports	49
		Test Port	49
Concentric	37	Vent Lengths	50
Typical Configurations	38	Rigid Vent Length	50
Concentric Adaptors	39	Elbows and Tees	50
Concentric Centric Increaser	39	15° Elbow	50
2' / 4 & 3' / 5' Twin Pipe/Concentric Reversible Adaptor	39	Zero Radius 8' 15° Elbow	50
Concentric to Twin Pipe Adaptor	39	30° Elbow	51
Twin Pipe to Concentric Adaptor	39	Zero Radius 8' 30° Elbow	50
Condensate Management	40	45° Elbow	51
Concentric Horizontal Drain Tee	40	Zero Radius 8' 45° Elbow	51
Universal Ball Valve Siphon	40	87° Elbow	51
Concentric Test Ports	40	Zero Radius 8' 87° Elbow	52
Concentric Test Port	40	Tee	52
Concentric Vent Lengths	41	Tee Cap	52
Concentric Vent Lengths	41	Base Supports	52
Elbows	41	Base Support	52
Concentric 45° Elbow	41	Common Venting and Condensate Management	53
Concentric 87° Elbow	41	Branch Tees	53
Roof Flashing	42	Custom Branch Tees	53
Concentric Roof Flashing	42	Cascade Component Kits	54
Terminations	42	Horizontal Drain Tee	54
Concentric Roof Termination	42	Horizontal Drain Fitting	55
Concentric Wall Termination	42	Tee Cap with Drain	55
Concentric Kits	43	Universal Ball Valve Siphon	55
Concentric Kit Horizontal	43	Terminations	56
Concentric Kit Vertical	43	Pitched Roof Flashing	56
Accessories	43	Flat Roof Flashing	56
Wall Plate	43	Chimney Cover SS with PPs-Gray End Pipe	56
Support Clamp	43	End Pipe PPs-Gray	56
		Termination Tee (long)	57
Commercial Single Wall	44	Velocity Cone	57
Typical configurations	45	PPs to PVC Termination Kit	57
Appliance Adaptors	46	Accessories	57
Commercial Appliance Adaptor for Coupler Style		Bird Screen PPs-UV	57
Flue Collar	46	Bird Screen SS	58
Commercial Appliance Adaptor for Flue Collar with		Spacers	58
Hose Clamp	46	Flue Clamp	58
Commercial Appliance Adaptor w/ Condensate		Connector Ring	58
Drain and Vibration Isolation Boot OEM to InnoFlue®	46	Wall Plates	59
Commercial Flanged Adaptor OEM to InnoFlue®	47	Connector Double Hose Clamp	59
Commercial Appliance Adaptor OEM to InnoFlue®	47	Support Clamp	59
Commercial Appliance Adaptor SS to InnoFlue®	47	EPDM Gaskets	59
Vibration Isolation Boot with Clamps	47	Centrocerein	59
Custom Appliance Adaptors	48		

InnoFlue®

The intelligent alternative to PVC & CPVC

Across North America, home owners, maintenance professionals, contractors, distributors, engineers and heating equipment manufacturers are recognizing the unmatched value InnoFlue® delivers to the HVAC industry.

Manufactured from environmentally friendly polypropylene, InnoFlue® has been tested and is listed to all relevant American, Canadian and European Safety Standards. It is listed and warranted for sustained flue gas temperatures up to 230°F (110°C), thus providing enhanced performance properties and significant safety margins. Centrotherm offers a comprehensive product line including test/inspection ports, condensate drains, siphons, flue collar adaptors, as well as excellent technical, sales and marketing support.

InnoFlue® Vent Systems are professional, reliable, environmentally sustainable and offer substantial labor savings due to reduced installation times.



Why InnoFlue®?

Ease of Installation

- Integrated gasket system allows for:
 - Faster, cleaner, V.O.C.-free installation
 - Immediate use of appliances upon installation
 - Post-installation adjustments
- No fit up, couplers, primers or adhesives needed
- Light weight makes for easy handling and rapid installation
- New 1/4" pitch for 2", 3" and 4" Single Wall vent systems

Health and Safety

ETL Listed: UL 1738, ULC-S636

Listed: CE EN 14471

- Performs at sustained flue temperatures up to 230°F (110°C)
- Listed at zero clearance to combustibles for all systems configurations
- Environmentally-friendly polypropylene is 100% recyclable
- Industry leading wall thickness enhances structural durability
- Chloride free

Warranty & Reliability

- Manufacturer-supported and guaranteed with an unprecedented 10-year limited warranty
- Enhanced corrosion resistance allows for use with oil, propane, and gas fired appliances
- Over 20 years of field service history

Listings



Centrotherm made the commitment and investment to have its Single Wall, Flexible and Concentric Vent Systems tested to the industry relevant UL-1738, ULC-S636 and CE EN 14471 safety standards. Thus InnoFlue® is approved for use in the United States, Canada and most European Countries.

As of this printing, InnoFlue® is the only polypropylene vent system to be listed by an accredited third party to the rigorous safety standards, UL 1738, ULC-S636 and CE EN 14471.

For information about Centrotherm's product testing and listings, visit:

UL 1738 - Intertek
ULC-S636 - Intertek
CE EN 14471 - TÜV



Product Approvals

Since 2010, Centrotherm's InnoFlue® has been accepted and approved by over 50 North American manufacturers of boilers, water heaters and furnaces. For a complete listing of the approvals, visit

<http://www.centrotherm.us.com/Tools/OEM-Approval-Matrix.aspx>

Our appliance approvals increase regularly.

For any questions, please contact your manufacturer's representative or Centrotherm Eco Systems.

Applications and Limitations

- In order to maintain relevant listings and Centrotherm's warranty, **InnoFlue®** vent systems may not be combined with any polymeric or stainless steel vent components that are not part of Centrotherm's published offerings.
- **InnoFlue®** SW, **InnoFlue®** Flex, **InnoFlue®** Concentric, and **BlitzFlex®** must be installed following Centrotherm's published installation instructions.
- **InnoFlue®** SW, **InnoFlue®** Flex, and **InnoFlue®** Concentric are ETL listed to UL and ULC standards for use with natural gas or propane fired, Cat. II or Cat. IV appliances (US) or BH Gas Class II A, B and C gas or propane fired appliances (Canada).
- **InnoFlue®** SW, **InnoFlue®** Flex, and **InnoFlue®** Concentric can also be used for oil fired, condensing appliances with a maximum flue gas temperature that does not exceed 230°F (110°C).
- **InnoFlue®** SW, **InnoFlue®** Flex, and **InnoFlue®** Concentric are ETL listed to UL 1738 and ULC-S636 at zero clearance to combustibles.
- **InnoFlue®** SW, **InnoFlue®** Flex, and **InnoFlue®** Concentric may be installed inside a masonry or sheet rocked chase, through an existing structurally intact metal flue, between floor joists, directly through a wall or if properly supported, can even be left exposed along the interior of a structure.
- **InnoFlue®** Flex is available in 2", 3" and 4" diameters and offers all necessary components for combining it with **InnoFlue®** SW and **InnoFlue** Concentric to meet specific job requirements.
- **InnoFlue®** Flex may be used in offsets or bends not to exceed 45° from vertical.
- **InnoFlue®** Flex must be installed inside a masonry chimney or sheet rocked chase, or through an existing, structurally intact metal flue.
- Single or multiple **InnoFlue®** Flex may be installed into an existing masonry chimney or structurally intact metal flue or chase.
- When the outside temperature is less than 32°F (0°C), install **InnoFlue®** Flex and **BlitzFlex®** liner from bottom of chase.
- When using **InnoFlue®** Flex, reduce maximum vent length per equipment manufacturer's instruction manual.
- **InnoFlue®** Concentric is available in 2 1/4", 3 1/5" and 4 1/6" diameters and offers all necessary components for combining it with **InnoFlue®** SW and **InnoFlue®** Flex to meet specific job requirements.
- Do not install where ambient air temperature can exceed 300°F.




BlitzFlex®

BLITZ
THE FASTEST AIR INTAKE SOLUTION


FLEX

Typical configurations

- 2 ISEL: Elbow
- 3 ISVL: Vent Length
- 4 IASCM: Support Clamp
- 12 Appliance Adaptor
- 25 IASP: Spacer
- 28 ISCP: Chimney Cover PPs-UV
- 40 **BlitzFlex**® Air-Intake Component

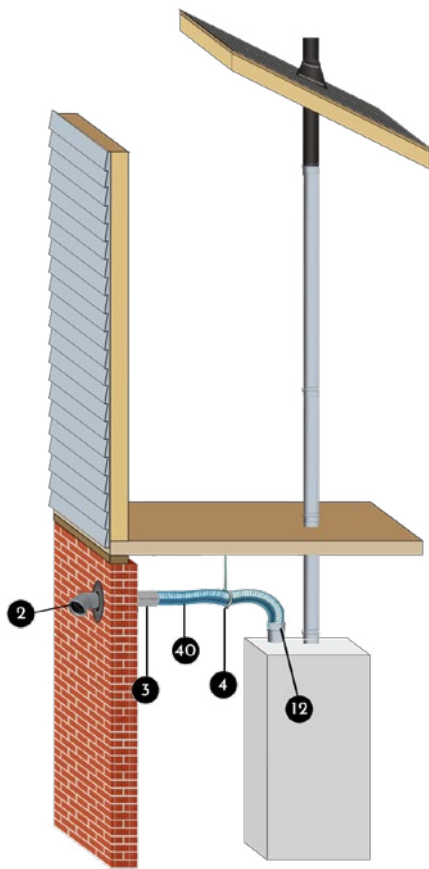

BlitzFlex® Sidewall Termination, where **BlitzFlex**® provides one continuous air-intake from appliance adaptor to termination, and terminates horizontally with a **Centrotherm BlitzKit**.

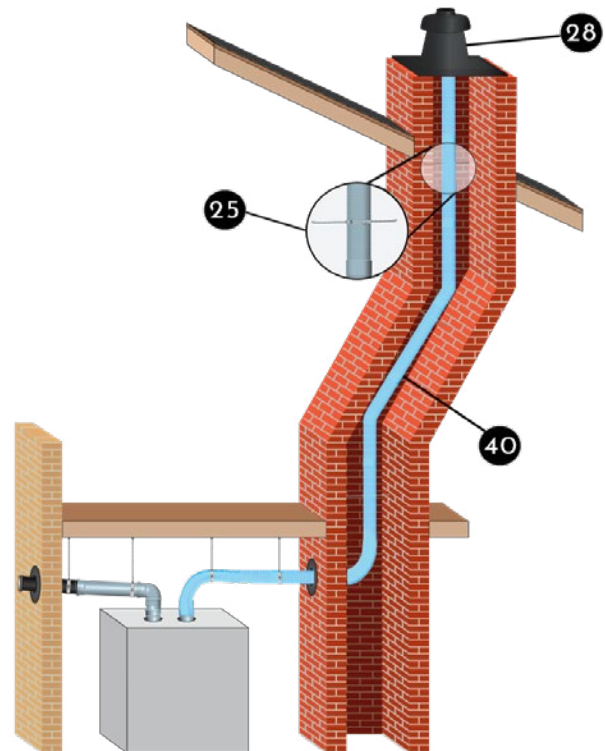

BlitzFlex® is designed to handle offsets in your air-intake run, and will reduce necessary components thus saving you time and money on every job. Uncoil **BlitzFlex**®, cut to length, and install a continuous in-take system in minutes. Additional supports may be required on longer runs.

BlitzFlex® Air-Intake Systems



BlitzFlex® Air-Intake Component

Is manufactured from corrugated polymer. **BlitzFlex®** can be field cut and is ideal for handling offsets. Use with BlitzKit to complete air-intake systems in a single continuous run.

Nominal Diameter	Part	Coil Length	Box Height	Box Length	Box Width
2" (60)	BFVL02050	50'	12.5"	26.5"	26.5"
3" (80)	BFVL03050	50'	16.75"	30.5"	30.75"
4" (110)	BFVL04050	50'	35.5"	37"	20.5"



Horizontal BlitzKits

Are manufactured from polypropylene for use with **BlitzFlex®**. Contains **InnoFlue®** appliance adaptor (QTY 1), support clamps (QTY 2), 45° elbow (QTY 1), and 2' vent length (QTY 1). Additional supports may be required on longer runs.

Note: 2' BlitzKits come with Rigid to Flex Coupler (QTY1) and Flex to Rigid Coupler (QTY 1)


Nominal Diameter	Part	Height	Length	Width
2" (60)	BFCK02	17.5"	7.25"	7.25"
3" (80)	BFCK03	30.8"	7.25"	7.25"
4" (110)	BFCK04	30.8"	7.25"	7.25"

BLITZ **FLEX**
THE FASTEST AIR INTAKE SOLUTION


Residential SW

Typical configurations



- 2 ISEL87: 87° Elbow
- 3 ISVL: Vent Length
- 4 IASCM: Support Clamp
- 5 IANS: Connector Ring
- 6 IAWP: Wall Plate
- 7 ISEP: End Pipe PPs-UV
- 8 ISTT: Termination Tee PPs-UV
- 9 IASPP: Bird Screen PPs-UV
- 11 ISELLUV: 87° Elbow Long PPs-UV
- 12 ISAGL or ISAAL: Appliance Adaptor
- 13 ISLPT: Low Profile Wall Termination
- 14 ICTC: Twin Pipe to Concentric Adaptor
- 15 ICRT: Concentric Roof Termination
- 16 ISVLUV: Vent Length PPs-UV Black

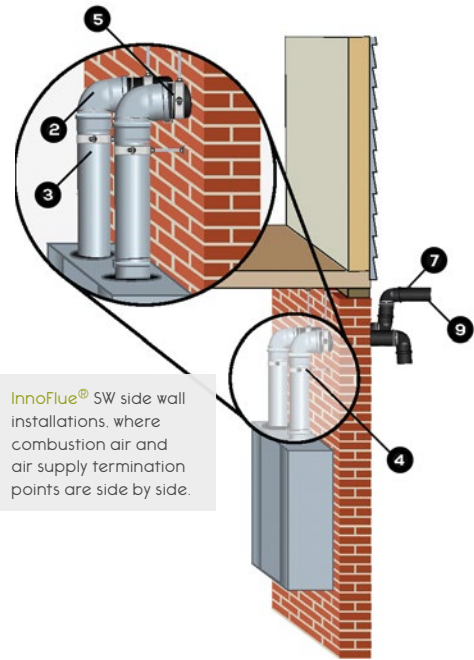

InnoFlue® SW side wall installations where combustion air and supply termination points can be significantly separated.

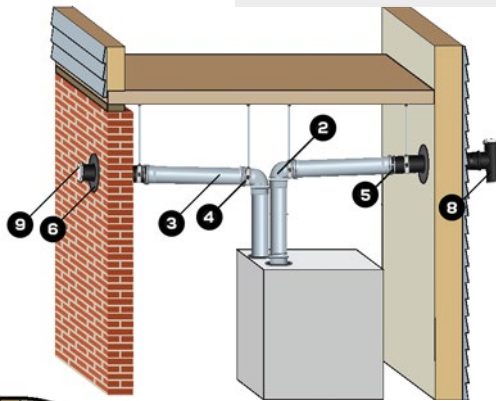

InnoFlue® SW side wall installations, where exhaust and air supply remain separated through the Low Profile Wall Termination.

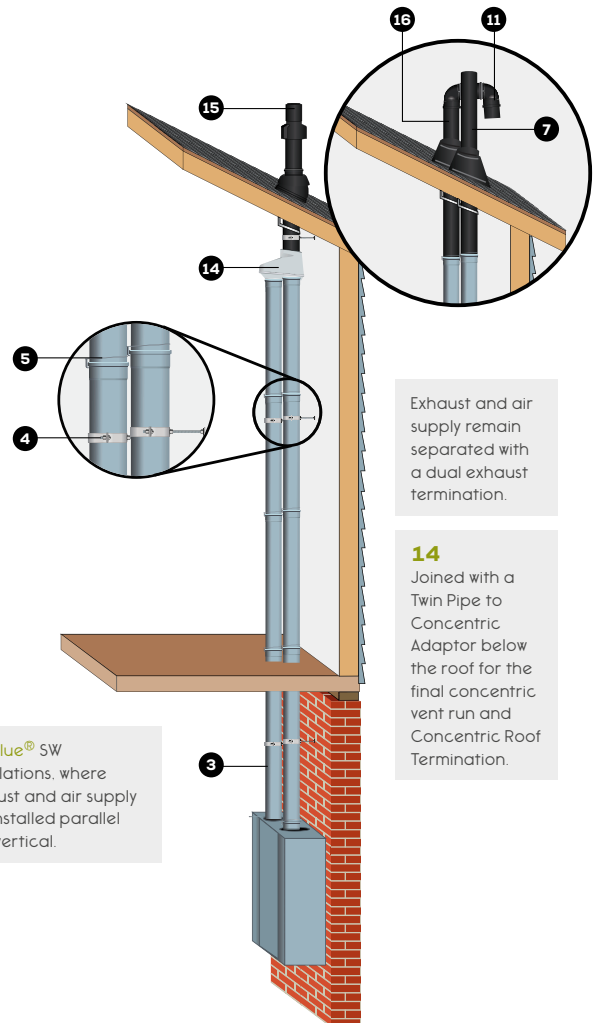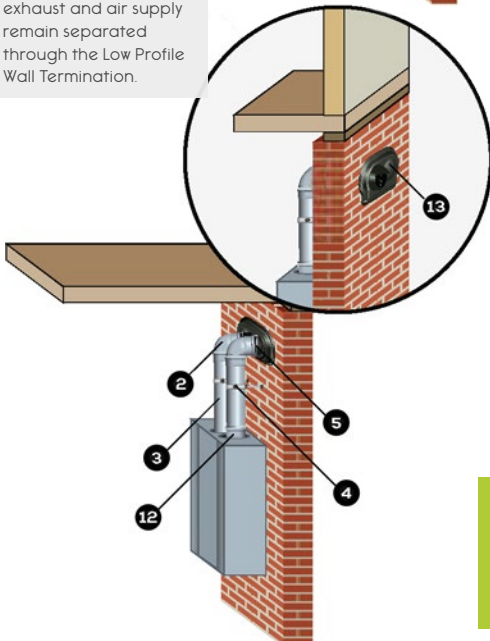

For each configuration, see installation instructions and specific code requirements.

Appliance Adaptors

Check adaptor matrix at www.centrotherm.us.com/literature/o-e-m-approvals

Appliance Adaptor for Coupler Style Flue Collars					
Adapts a female PVC / CPVC coupler or appliance flue exhaust to InnoFlue® SW diameters.					
Nominal Diameter PVC to PP	Part	Overall Length A	Effective Length B	Max O.D. C	
2"/2" (60/60)	ISAGL0202	3.3 (83)	1.0 (26)	3.0 (76)	
3"/3" (89/80)	ISAGL0303	3.0 (75)	0.8 (21)	3.8 (97)	
4"/4" (114/110)	ISAGL0404	3.4 (87)	0.8 (21)	5.1 (129)	
5"/5" (140/125)	ISAGL0505	5.7 (144)	0.8 (21)	5.8 (146)	

Appliance Adaptor for Flue Collar with Hose Clamp					
Adapts a female PVC / CPVC sized appliance collar (with integrated gasket) to InnoFlue® SW diameters.					
Nominal Diameter PVC to PP	Part	Overall Length A	Effective Length B	Max O.D. C	
2"/2" (60/60)	ISAAL0202	3.3 (83)	1.0 (26)	3.0 (76)	
3"/3" (89/80)	ISAAL0303	3.0 (75)	0.8 (21)	3.8 (97)	
4"/4" (114/110)	ISAAL0404	3.4 (87)	0.8 (21)	5.1 (129)	
5"/5" (140/125)	ISAAL0505	5.7 (144)	0.8 (21)	5.8 (146)	

Appliance Adaptor Tapered SS to InnoFlue®					
Adapts a tapered female stainless steel appliance flue exhaust with tabs to InnoFlue®					
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C	
3" (80)	ISAAS0303	4.5 (115)	0.8 (21)	3.8 (97)	
4" (110)	ISAAS0404	4.8 (122)	0.8 (21)	5.1 (129)	

Appliance Adaptor Straight SS to InnoFlue®					
Adapts a stainless steel appliance flue exhaust with gasket and clamp to InnoFlue®					
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C	
3"/3" (76/80)	ISSA0303	6.0 (153)	3.1 (78)	3.8 (97)	
4"/4" (102/110)	ISSA0404	6.0 (153)	3.6 (91)	5.1 (129)	
5"/5" (127/125)	ISSA0505	6.5 (166)	3.9 (99)	5.8 (146)	

Appliance Adaptors 101mm to PPs				
Adapts 101mm diameter flue exhaust to InnoFlue® Adaptors include replacement o-ring for flue collar.				
Nominal Diameter PVC to PP	Part	Overall Length A	Effective Length B	Max O.D. C
4" (100/101)/3" (80)	ISAO10103	6.5 (165)	3.3 (84)	3.8 (97)
4" (100/101)/4" (110)	ISAO10104	6.4 (163)	4.0 (102)	5.1 (129)

Available

Custom Appliance Adaptors

Available to fit most residential and commercial heating appliances. Call for pricing.

Increasesers & Reducers

Eccentric Increaser				
Transitions vent system to a larger diameter. Install in horizontal or vertical orientation. Other size combinations available upon request.				
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2"/3" (60/80)	ISEI0203	5.3 (135)	3.1 (79)	3.8 (97)
3"/4" (80/110)	ISEI0304	6.1 (156)	3.6 (91)	5.1 (129)
4"/5" (110/125)	ISEI0405	6.7 (170)	4.2 (106)	5.8 (146)

Centric Increaser				
Transitions vent system to a larger diameter. Install in vertical orientation only. Additional configurations available upon request.				
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2"/3" (60/80)	ISIA0203	5.9 (150)	3.5 (89)	3.8 (97)
3"/4" (80/110)	ISIA0304	5.7 (145)	3.2 (81)	5.1 (129)
4"/4" (100/110)	ISIA10004	6.4 (163)	4.2 (105)	5.1 (129)
4"/5" (110/125)	ISIA0405	6.8 (173)	4.3 (110)	5.8 (146)


3/2" Reducer				
Transitions vent system to a smaller diameter.				
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
3"/2" (80/60)	ISRD0302	60 (153)	3.5 (89)	3.2 (80)

Reducers				
Transitions vent system to a smaller diameter.				
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
4"/3" (110/80)	ISRD0403	6.0 (153)	3.5 (89)	4.3 (110)
5"/4" (125/110)	ISRD0504	6.5 (166)	4.0 (102)	4.9 (125)
6"/4" (160/110)	ISRD0604	6.5 (166)	4.0 (102)	6.3 (160)
6"/5" (160/125)	ISRD0605	6.5 (166)	4.0 (102)	6.3 (160)
5"/5" (130/125)	ISRD13005	5.0 (127)	4.7 (120)	5.1 (130)
6"/4" (150/110)	ISRD15004	8.8 (223)	6.5 (165)	5.9 (150)
6"/5" (150/125)	ISRD15005	9.1 (230)	6.7 (170)	5.9 (150)

Test Ports

Test Ports				
Installed immediately above the appliance, the test port allows plumbing and heating professionals to sample flue gases and ensure the appliance is operating at optimum efficiency.				
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	ISTP02	7.0 (170)	4.3 (110)	3.0 (76)
3" (80)	ISTP03	7.0 (170)	4.5 (115)	3.8 (97)
4" (110)	ISTP04	12.4 (314)	9.8 (250)	5.1 (129)
5" (125)	ISTP05	12.6 (320)	9.8 (250)	5.8 (146)

Vent Lengths

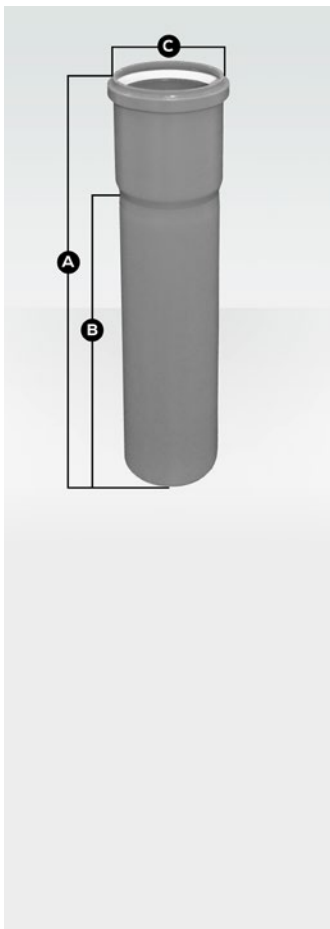


Rigid Vent Length

Rigid polypropylene vent lengths with dedicated male and female ends. Female ends contain internal gasket and male ends can be field cut and chamfered to desired length.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	ISVL021	16.4 (411)	12 (305)	3.0 (76)
2" (60)	ISVL022	28.4 (716)	24 (610)	3.0 (76)
2" (60)	ISVL023	40.4 (1021)	36 (914)	3.0 (76)
2" (60)	ISVL026	76.4 (1935)	72 (1829)	3.0 (76)
2" (60)	ISVL0210	124.2 (3155)	120 (3048)	3.0 (76)
3" (80)	ISVL031	16.4 (411)	12 (305)	3.8 (97)
3" (80)	ISVL032	28.4 (716)	24 (610)	3.8 (97)
3" (80)	ISVL033	40.2 (1021)	36 (914)	3.8 (97)
3" (80)	ISVL036	76.4 (1935)	72 (1829)	3.8 (97)
3" (80)	ISVL0310	124.2 (3155)	120 (3048)	3.8 (97)
4" (110)	ISVL041	16.0 (406)	12 (305)	5.1 (129)
4" (110)	ISVL042	28.0 (711)	24 (610)	5.1 (129)
4" (110)	ISVL043	40.2 (1016)	36 (914)	5.1 (129)
4" (110)	ISVL046	76.2 (1930)	72 (1829)	5.1 (129)
4" (110)	ISVL0410	124.2 (3155)	120 (3048)	5.1 (129)
5" (125)	ISVL051	15.9 (404)	12 (305)	5.8 (146)
5" (125)	ISVL052	27.9 (709)	24 (610)	5.8 (146)
5" (125)	ISVL053	39.9 (1013)	36 (914)	5.8 (146)
5" (125)	ISVL056	75.9 (1928)	72 (1829)	5.8 (146)


Base Supports

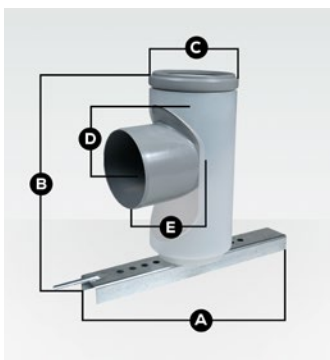


Base Support

Supports vertical sections of rigid (up to 164') and flexible (up to 98' with Flex end pipe) vent lengths installed in chimneys and chases.


Nominal Diameter	Part	Base Length A	Height B	Max O.D. C	Effective D	Effective E
2" (60)	ISBS0287	15.8 (400)	9.4 (238)	3.0 (76)	2.7 (69)	4.6 (118)
3" (80)	ISBS0387	15.8 (400)	10.6 (269)	3.8 (97)	3.4 (86)	4.9 (125)
4" (110)	ISBS0487	15.8 (400)	11.5 (291)	5.1 (129)	2.6 (65)	4.5 (115)
5" (125)	ISBS0587	15.8 (400)	13.4 (341)	5.8 (146)	2.9 (74)	5.4 (136)

Base Support Bracket		
	B-Vent Support Bracket (IABVSB) replaces metal channel on base support to support vertical sections of rigid and flexible vent lengths installed inside a B-Vent. Fastens to floor joists.	
	Part	Width A
	IABVSB	17.5 (446)

Elbows and Tees

15° Elbow				
	For offsets or changes in the direction of the vent system.			
	Nominal Diameter	Part	Centerline Offset A	Effective Length B
	2" (60)	ISEL0215	0.7 (18)	3.3 (84)
	3" (80)	ISEL0315	0.7 (18)	3.1 (79)
	4" (110)	ISEL0415	0.8 (20)	3.6 (91)
	5" (125)	ISEL0515	0.9 (23)	4.6 (117)

30° Elbow				
	For offsets or changes in the direction of the vent system.			
	Nominal Diameter	Part	Centerline Offset A	Effective Length B
	2" (60)	ISEL0230	1.5 (38)	3.6 (91)
	3" (80)	ISEL0330	1.4 (36)	3.4 (86)
	4" (110)	ISEL0430	1.7 (43)	4.1 (104)
	5" (125)	ISEL0530	1.8 (46)	5.1 (130)

45° Elbow				
	For offsets or changes in the direction of the vent system.			
	Nominal Diameter	Part	Centerline Offset A	Effective Length B
	3" (80)	ISEL0345	2.2 (56)	3.6 (92)
	4" (110)	ISEL0445	2.2 (63)	4.1 (105)
	5" (125)	ISEL0545	2.7 (68)	4.8 (122)
				5.8 (146)

45° Elbow Long				
Longer 45° Elbow allows for greater offsets or changes in the direction of the vent system.				
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
2" (60)	ISELL0245	2.2 (56)	3.8 (96)	3.0 (76)

87° Elbow				
For offsets or changes in the direction of the vent system.				
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
2" (60)	ISELL0287	2.5 (63)	4.8 (121)	3.0 (76)

87° Elbow				
For offsets or changes in the direction of the vent system.				
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
3" (80)	ISEL0387	5.3 (133)	5.0 (127)	3.7 (97)
4" (110)	ISEL0487	2.4 (60)	4.6 (118)	5.1 (129)
5" (125)	ISEL0587	2.7 (68)	5.5 (139)	5.8 (146)

Tee				
Use to change the direction of the vent system, combine multiple appliances, and capture condensates at base of long vertical runs.				
Nominal Diameter	Part	Effective Length A	Effective Length B	Effective Length C
2" (60)	IST02	6.3 (160)	8.7 (221)	2.6 (66)
3" (80)	IST03	6.3 (160)	8.7 (221)	2.7 (69)
4" (110)	IST04	5.6 (142)	8.4 (214)	3.0 (76)
5" (125)	IST05	5.9 (149)	10.1 (256)	3.7 (94)

Tee Cap		
Seals non-utilized tees and branch tees.		
Nominal Diameter	Part	Max O.D. A
2" (60)	ISTC02	3.0 (76)
3" (80)	ISTC03	3.8 (97)
4" (110)	ISTC04	5.1 (129)
5" (125)	ISTC05	5.8 (146)

Condensate Management

Horizontal Drain Tee				
Use with any InnoFlue® siphon to drain condensate from the vent system. Install in horizontal section closest to appliance. 1.26" (32mm) O.D. drain.				
Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	ISHDT02	9.8 (250)	7.3 (186)	3.0 (76)
3" (80)	ISHDT03	9.8 (250)	7.3 (186)	3.7 (94)
4" (110)	ISHDT04	12.4 (315)	9.8 (250)	4.1 (129)
5" (125)	ISHDT05	12.4 (315)	9.8 (250)	5.8 (146)

Tee Cap with Drain				
Use with any InnoFlue® siphon to drain condensate from the vent system.				
Nominal Diameter	Part	Overall Length A	Max O.D. B	Drain O.D. C
2" (60)	ISTCD02	6.1 (155)	3.0 (75)	1.3 (32)
3" (80)	ISTCD03	5.3 (135)	3.7 (95)	1.3 (32)
4" (110)	ISTCD04	5.9 (150)	5.0 (126)	1.3 (32)
5" (125)	ISTCD05	6.4 (163)	5.8 (146)	1.3 (32)




Universal Ball Valve Siphon

Attaches to any InnoFlue® drain. Allows condensates to flow while unique ball valve assures combustion gases remain contained at higher temperatures. Comes with and can be installed with a barbed or compression fitting. See configuration options below.

Part	Overall Height A	Width B	Length C
IASJBVS	6.5	4.5	1.9



Standard



Barbed



NRV

Horizontal Vent Kits



Horizontal Vent Kit

Includes all fittings and accessories required for short sidewall termination vent runs.

Nominal Diameter	Part
2" (60)	ISVKH02
3" (80)	ISVKH03
4" (110)	ISVKH04
5" (125)	ISVKH05


Terminations



Chimney Cover PPs-UV

This termination incorporates a combustion air intake and flue gas termination in a single assembly. Cover seals top of the chimney or chase. Use with End Pipe or Flex End Pipe. End Pipes sold separately.

Nominal Diameter	Part	Length A	Height B
2" (60)	ISCP02	15.8 (400)	9.6 (245)
3" (80)	ISCP03	15.8 (400)	9.6 (245)
4" (110)	ISCP04	15.8 (400)	9.6 (245)



Chimney Cover SS W/PPs-UV End Pipe

Stainless steel termination with polypropylene end pipe incorporates a combustion air intake and flue gas termination in a single assembly.

Nominal Diameter	Part	Length A	Height B	Height C
3" (80)	ISCM03	16.5 (419.1)	7.9 (200)	13.75 (349.3)
4" (110)	ISCM04	16.5 (419.1)	7.9 (200)	13.75 (349.3)
5" (125)	ISCM05	16.5 (419.1)	7.9 (200)	13.75 (349.3)



Low Profile Wall Termination

Low Profile Wall Termination incorporates air intake and exhaust into a single aesthetically pleasing termination. Part is paintable to match exterior of structure. Comes with interior wall plate and bird screen. Exhaust can be extended or re-directed with elbows or vent lengths. Vent lengths and elbows sold separately.

Nominal Diameter	Part	Overall Width A	Overall Height B
2" (60)	ISLPT0202	13 (330)	9.1 (231)
3" (80)	ISLPT0303	13 (330)	9.1 (231)




Universal B-Vent Cap

Allows for multiple flue configurations. Utilize existing B-Vent as a chase. Clean, professional and aesthetically pleasing. Installs quickly and easily.

Part	Length	Height	Width
IAUBVC	10"	10"	10"



One Part Multiple Configurations



Termination Tee

Made from black U.V. stabilized polypropylene. Use where termination is exposed to excessive sunlight, wind or prone to freeze ups.


Nominal Diameter	Part	Overall Width A	Effective Length B	Max Length C
2" (60)	ISTT0220	7.6 (193)	27.6	28.8
3" (80)	ISTT0320	7.6 (193)	27.6	29.2
4" (110)	ISTT0420	7.6 (193)	27.6	29.8
5" (125)	ISTT0520	8.0 (203)	27.6	30.1



End Pipe PPs-UV

Made from black U.V. stabilized polypropylene. Use where termination is exposed to excessive sunlight.

Nominal Diameter	Part	Overall Length A	Max O.D. B
2" (60)	ISEP02	19.7 (500)	2.4 (60)
2" (60)	ISEP0239	39.4 (1000)	2.4 (60)
3" (80)	ISEP03	19.7 (500)	3.2 (80)
3" (80)	ISEP0339	39.4 (1000)	3.2 (80)
4" (110)	ISEP04	19.7 (500)	4.3 (110)
4" (110)	ISEP0439	39.4 (1000)	4.3 (110)



Vent Lengths PPs-UV

Allows for the exterior extension of the vent system.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	ISVL022UV	28.4 (721)	24 (610)	3.0 (75)
3" (80)	ISVL032UV	28.4 (721)	24 (610)	3.8 (97)
4" (110)	ISVL042UV	28.2 (716)	24 (610)	5.1 (129)
5" (125)	ISVL052UV	26.5 (673)	24 (610)	5.8 (146)



45° Elbow Long PPS-UV

For exterior offsets or changes in the direction of the vent system.


Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
2" (60)	ISELL0245UV	2.2 (56)	3.8 (96)	3.0 (76)
3" (80)	ISELL0345UV	2.9 (73)	4.6 (117)	3.8 (97)



45° Elbow PPS-UV

For exterior offsets or changes in the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
4" (110)	ISEL0445UV	2.2 (63)	4.1 (105)	5.1 (129)



87° Elbow Long PPS-UV

For exterior offsets or changes in the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
2" (60)	ISELL0287UV	2.5 (63)	4.8 (121)	3.0 (76)
3" (80)	ISELL0387UV	5.3 (133)	5.1 (129)	3.8 (97)



87° Elbow PPS-UV

For exterior offsets or changes in the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
4" (110)	ISEL0487UV	2.4 (80)	4.6 (118)	5.1 (129)


PPs to PVC Termination Kit				
Adapts PPs to PVC Twin Pipe Termination. Comes with replacement wall plate and termination adaptor.				
Nominal Diameter	Part	Overall Length A	Effective Length B	End O.D. C
2" (60)	ISLTK02	12.3 (313)	11.0 (280)	2.4 (61)
3" (80)	ISLTK03	13.0 (330)	11.0 (280)	3.5 (89)
4" (110)	ISLTK04	13.2 (336)	11.0 (280)	4.5 (115)

Accessories

Bird Screen PPs-UV	
Fits inside InnoFlue® SW and Flex end-pipes at terminations.	
Nominal Diameter	Part
2" (60)	IASPP02
3" (80)	IASPP03
4" (110)	IASPP04

Bird Screen SS	
Fits inside InnoFlue® SW and Flex end-pipes at terminations.	
Nominal Diameter	Part
5" (125)	IASSS05

2", 3", 4" and 5" Spacers			
Self positioning spacers center InnoFlue® SW or Flex in a chase/chimney/B-vent.			
Nominal Diameter	Part	Max Width A	Min Width
2" (60)	IASP02	23.5 (596)	3.3 (85)
3" (80)	IASP03	22.8 (580)	4.2 (106)
4" (110)	IASP04	23.9 (606)	5.4 (138)
5" (125)	IASP05	24.6 (625)	6 (151)



Flue Clamp

Secures ISAGL appliance adaptors to appliance flue collar.


Nominal Diameter	Part	Height A	Max. I.D. B
2" (60)	IAFC02	1.0 (26)	3.0 (77)
3" (80)	IAFC03	1.0 (26)	4.3 (110)
4" (110)	IAFC04	1.0 (26)	5.0 (127)



Support Clamp

Used as vertical or horizontal support. Space 78" in vertical and 39" in horizontal installations. **Uses 3/8" threaded rod.**


Nominal Diameter	Part	Overall Length A	Height B
2" (60)	IASCM02	3 (76.2)	1.1 (28)
3" (80)	IASCM03	3.8 (96.5)	1.1 (28)
4" (110)	IASCM04	5.3 (134.6)	1.1 (28)
5" (125)	IASCM05	5.8 (147.3)	1.1 (28)



Wall Plate Square (Plastic)

Used to improve aesthetics and reduce drafts at chimney openings or wall penetrations.

Nominal Diameter	Part	Length A	Length B
2" (60)	IAWP02BP	6 (150)	6 (150)
3" (80)	IAWP03BP	6 (150)	6 (150)
4" (110)	IAWP04BP	6 (150)	6 (150)



Connector Ring

Provides reinforcement at joints to support loads of up to 99 lbs (45Kg).


Nominal Diameter	Part	O.D. A
2" (60)	IAN502	3.2 (81)
3" (80)	IAN503	4.1 (103)
4" (110)	IAN504	5.3 (134)
5" (125)	IAN505	5.8 (148)



EPDM Gaskets

Standard gasket for 2" through 5" diameter InnoFlue® SW. Inserted into the female end of each part, the gaskets keep flue gases and condensates within the vent system.

Nominal Diameter	Part
2" (60)	ISGE02
3" (80)	ISGE03
4" (110)	ISGE04
5" (125)	ISGE05



B-Vent Gasket

Rubber gasket for converting existing B-Vent into a combustion air chase. Nominal

Diameter	Part	Flange I.D. A	Max O.D. B	Groove Thickness C
2" (60)	IACGE02	2.8 (72)	3.5 (88)	0.1 (2.5)
3" (80)	IACGE03	3.6 (92)	4.3 (108)	0.1 (2.5)
4" (110)	IACGE04	4.8 (122)	5.4 (137)	0.1 (2.5)



Centrocerin

A water based lubricant used to ease the assembly of InnoFlue® SW & Flex. Sparingly applied to the gasket or male end.



Package Size	Part
50 ml	IACE50

Flex

Flex



Typical configurations

- 2 ISEL87: 87° Elbow
- 3 ISVL: Vent Length
- 4 IASCM: Support Clamp
- 5 IANS: Connector Ring
- 6 IAWP: Wall Plate
- 7 ISEP: End Pipe PPs-UV
- 8 ISTT: Termination Tee PPs-UV
- 9 IASPP: Bird Screen PPs-UV
- 12 ISAGL or ISAAL: Appliance Adaptor
- 24 ISBS: Base Support
- 25 IASP: Spacer
- 27 IFVL: Flexible Vent Length
- 28 ISCP: Chimney Cover PPs-UV
- 29 IFEP: Flex End Pipe
- 30 IFFSC: Flex to SW Coupler
- 36 IAUBV: Universal B-Vent Cap
- 37 IFPT: Custom Chimney Cover

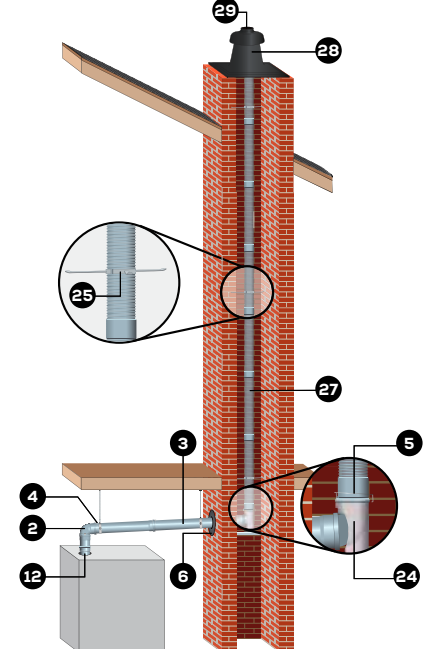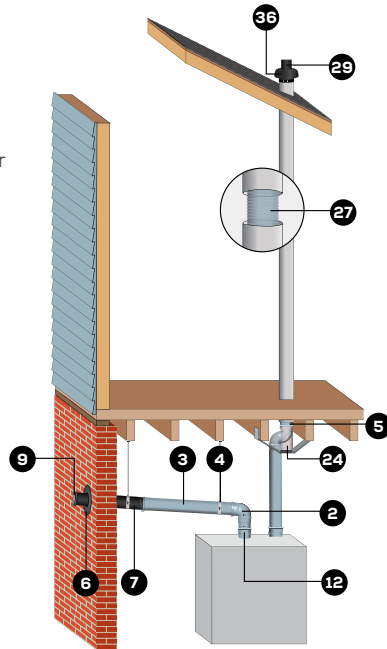

InnoFlue® SW and Flex installations, where InnoFlue® SW is used to pass flue gases to the base of a structurally intact metal chase, then InnoFlue® Flex to get them to the termination at the top. Combustion air is not supplied through the metal flue.

InnoFlue® SW and Flex installations, where InnoFlue® SW is used to pass flue gases to the base of the chimney, then InnoFlue® Flex to get them to the termination at the top.

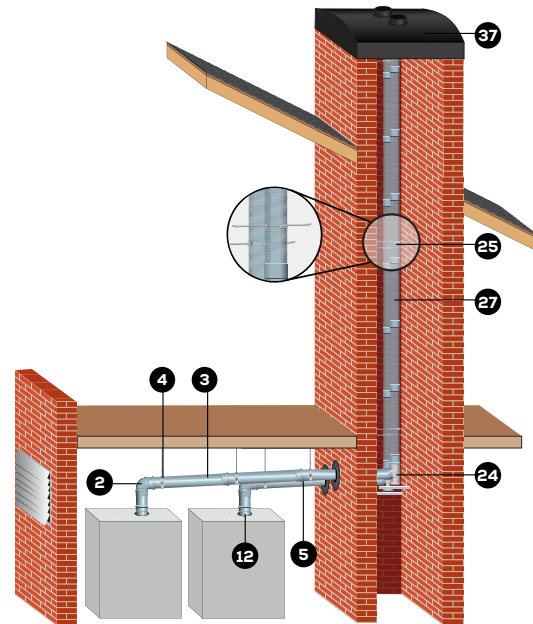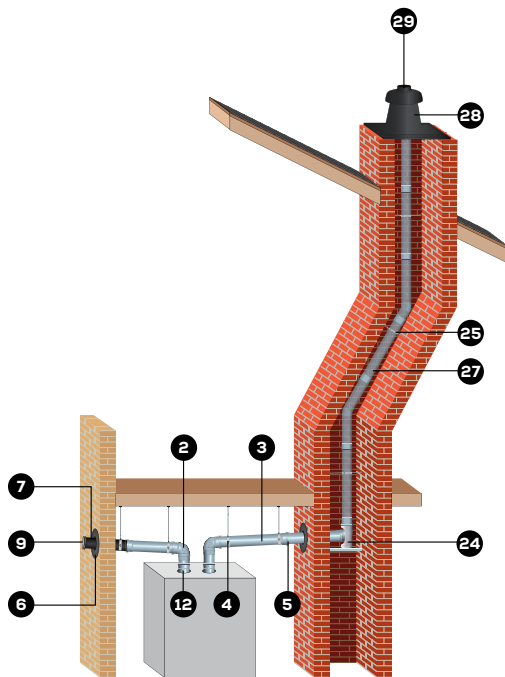

InnoFlue® SW and Flex installations, where InnoFlue® SW is used to pass flue gases to the base of the chimney, then InnoFlue® Flex to get them to the termination at the top. Combustion air is not supplied through the masonry chimney.

InnoFlue® SW and Flex installations, where InnoFlue® is used to pass flue gases of multiple appliances to the base of a structurally intact masonry chimney or metal flue, then InnoFlue® SW or Flex to get them to the Custom Chimney Cover at top.


Flex Vent Lengths

Flex

	2" Flex			
	Is manufactured from polypropylene. 2" Flex can be field cut and is ideal for use in chimneys with offsets. With couplers, 2" Flex can be connected to 2" Flex or InnoFlue® SW.			
	Nominal Diameter	Part	Overall Height A	Max O.D. B
	2" (60)	IFVL02025	25' (7.6m)	2.3 (58)
	2" (60)	IFVL02035	35' (10.7m)	2.3 (58)
	2" (60)	IFVL02050	50' (15.2m)	2.3 (58)
	2" (60)	IFVL02150	150' (45.7m)	2.3 (58)

	3" and 4" Flex			
	Are manufactured from polypropylene and feature rigid sections every 2'. 3" and 4" Flex can be field cut and are ideal for use in chimneys with offsets. The base of your 3" and 4" Flex can be connected to InnoFlue® SW at any rigid section without coupler. Flex to Flex couplers available for extended flex runs.			
	Nominal Diameter	Part	Overall Height A	Max O.D. B
	3" (80)	IFVL03025	25' (7.6m)	3.3 (84)
	3" (80)	IFVL03035	35' (10.7m)	3.3 (84)
	3" (80)	IFVL03040	40' (12.2m)	3.3 (84)
	3" (80)	IFVL03050	50' (15.2m)	3.3 (84)
	3" (80)	IFVL03080	80' (24.4m)	3.3 (84)
	3" (80)	IFVL03150	150' (45.7m)	3.3 (84)
	4" (110)	IFVL04025	25' (7.6m)	4.3 (110)
	4" (110)	IFVL04035	35' (10.7m)	4.3 (110)
	4" (110)	IFVL04040	40' (12.2m)	4.3 (110)
	4" (110)	IFVL04050	50' (15.2m)	4.3 (110)
	4" (110)	IFVL04080	80' (24.4m)	4.3 (110)


Base Supports

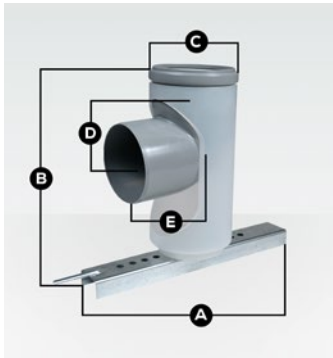

Base Support

Supports vertical sections of rigid (up to 164') and flexible (up to 98' with Flex end pipe) vent lengths installed in chimneys and chases.

Nominal Diameter	Part	Base Length A	Height B	Max O.D. C	Effective D	Effective E
2" (60)	ISBS0287	15.8 (400)	9.4 (238)	3.0 (76)	2.7 (69)	4.6 (118)
3" (80)	ISBS0387	15.8 (400)	10.6 (269)	3.8 (97)	3.4 (86)	4.9 (125)
4" (110)	ISBS0487	15.8 (400)	11.5 (291)	5.1 (129)	2.6 (65)	4.5 (115)
5" (125)	ISBS0587	15.8 (400)	13.4 (341)	5.8 (146)	2.9 (74)	5.4 (136)




Base Support Bracket

B-Vent Support Bracket (IABVSB) replaces metal channel on base support to support vertical sections of rigid and flexible vent lengths installed inside a B-Vent. Fastens to floor joists.

Part	Width A	Height B
IABVSB	17.5 (446)	11.8 (298)

Couplers and Accessories



2", 3", 4" and 5" Spacers

Self positioning spacers center InnoFlue® SW or Flex in a chase/chimney/B-vent.


Nominal Diameter	Part	Max Width A	Min Width
2" (60)	IASP02	23.5 (596)	3.3 (85)
3" (80)	IASP03	22.8 (580)	4.2 (106)
4" (110)	IASP04	23.9 (606)	5.4 (138)



SW to Flex Coupler

Transitions 2' InnoFlue® Single Wall Rigid to 2' InnoFlue® Flex.


Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	IFSFC02	4.2 (107)	3.2 (81)	2.6 (65)



2" Flex to SW Coupler

Transitions 2" InnoFlue® Flex to 2" InnoFlue® Single Wall Rigid.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	IFFSC02	3.9 (99)	1.1 (28)	3.0 (76)



3" and 4" Flex to SW Coupler

Transitions InnoFlue® Flex to InnoFlue® Single Wall Rigid.


Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
3" (80)	IFFSC03	5.5 (138)	4.3 (60)	3.9 (100)
4" (110)	IFFSC04	6.5 (171)	2.64 (67)	5.1 (128)



2" Flex to Flex Coupler

Connects 2" InnoFlue® Flex to 2" InnoFlue® Flex.


Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	IFFFC02	3.4 (87)	1.4 (35)	2.6 (65)



3" and 4" Flex to Flex Coupler

Connects 3" and 4" InnoFlue® Flex to 3" and 4" InnoFlue® Flex.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
3" (80)	IFFFC03	5.5 (141)	4.3 (60)	3.9 (100)
4" (110)	IFFFC04	6.7 (166)	4.5 (114)	5.1 (128)



Connector Ring

Provides reinforcement at joints to support loads of up to 99 lbs (45Kg).

Nominal Diameter	Part	O.D. A
2" (60)	IANS02	3.2 (81)
3" (80)	IANS03	4.1 (103)
4" (110)	IANS04	5.3 (134)

B-Vent Kits



2" B-Vent Kit

Includes all components necessary to line a B-Vent from base to termination. Rigid vent lengths, elbows and adaptors required to connect B-Vent base support to appliance are sold separately.

Nominal Diameter	Part	Flex Vent Length
2" (60)	IFBK0225	25' (7.6m)
2" (60)	IFBK0235	35' (10.6m)
2" (60)	IFBK0250	50' (15.25m)

Kit contains B-Vent Support Bracket, Base Support, 3" or 4" Flex End Pipe, Universal B-Vent Cap, Connector Rings, Spacers and Centrocerin®.



3" and 4" B-Vent Kit

Includes all components necessary to line a B-Vent from base to termination. Rigid vent lengths, elbows and adaptors required to connect B-Vent base support to appliance are sold separately.

Nominal Diameter	Part	Flex Vent Length	B-Vent Diameter
3" (80)	IFBK0325	25' (7.6m)	4", 5", 6"
3" (80)	IFBK0335	35' (10.6m)	4", 5", 6"
3" (80)	IFBK0350	50' (15.25m)	4", 5", 6"
4" (110)	IFBK0425	25' (7.6m)	5", 6"
4" (110)	IFBK0435	35' (10.6m)	5", 6"
4" (110)	IFBK0440	40' (12.1m)	5", 6"

Kit contains B-Vent Support Bracket, Base Support, Single Wall-To-Flex Coupler, 2" Flex, Flex End Pipe, Universal B-Vent Cap, Connector Ring, Spacers and Centrocerin®.

Flex Component B-Vent Kits



2" Flex Component B-Vent Kit

Includes all fittings and accessories required to line a B-Vent excluding 2" flex. 2" flex and rigid vent length, elbows, adaptors required to connect B-Vent Base Support to appliance, and termination are sold separately.

Nominal Diameter	Part	B-Vent Diameter
2" (60)	IFBKC02	4"

Kit includes B-Vent Support Bracket, Base Support, Single Wall-To-Flex Coupler, Flex End Pipe, Universal B-Vent Cap, Connector Ring, Spacers and Centrocerin®.



3" and 4" Flex Component B-Vent Kit

Includes all fittings and accessories required to line a B-Vent excluding 3" or 4" Flex. 3" or 4" flex and rigid vent length, elbows, adaptors required to connect B-Vent Base Support to appliance, and termination are sold separately.

Nominal Diameter	Part	B-Vent Diameter
3" (80)	IFBKC03	4"
4" (110)	IFBKC04	5"

Kit includes B-Vent Support Bracket, Base Support, Flex End Pipe, Universal B-Vent Cap, Connector Ring, Spacers and Centrocerin.

Chimney Kits



2" Chimney Kit

Includes all components necessary to line a chimney from chimney termination to Base Support. Rigid vent lengths, elbows and adaptors required to connect chimney kit base support to appliance are sold separately. Custom flex lengths are available.

Nominal Diameter	Part	Flex Vent Length
2" (60)	IFCK0225	25' (7.6m)
2" (60)	IFCK0235	35' (10.7m)
2" (60)	IFCK0250	50' (15.2m)

Kit contains Base Support, Single Wall to Flex Coupler, Flex Vent Length, Flex End Pipe, Chimney Cover, Connector Rings, Spacers and Centrocerin.



3" and 4" Chimney Kit

Includes all components necessary to line a chimney from chimney termination to Base Support. Rigid vent lengths, elbows and adaptors required to connect chimney kit base support to appliance are sold separately. Custom flex lengths are available.

Nominal Diameter	Part	Flex Vent Length
3" (80)	IFCK0325	25' (7.6m)
3" (80)	IFCK0335	35' (10.7m)
3" (80)	IFCK0350	50' (15.2m)
4" (110)	IFCK0425	25' (7.6m)
4" (110)	IFCK0435	35' (10.7m)
4" (110)	IFCK0440	40' (12.2m)
4" (110)	IFCK0450	50' (15.2m)

Kit contains Base Support, Flex Vent Length, Flex End Pipe, Chimney Cover, Connector Rings, Spacers and Centrocerin.



2" Flex Component Chimney Kit

Includes all components necessary to line a chimney from chimney termination to Base Support excluding 2" flex, 2" flex and rigid vent lengths, elbows, adaptors required to connect Base Support to appliance, and termination are sold separately.

Nominal Diameter	Part
2" (60)	IFCKC02

Kit contains Base Support, Single Wall to Flex Coupler, Chimney Cover, Flex End Pipe, Connector Ring, Spacers and Centrocerin.



3" and 4" Flex Component Chimney Kit

Includes all components necessary to line a chimney from chimney termination to Base Support excluding 3" or 4" flex, 3" or 4" flex, and rigid vent lengths, elbows, adaptors required to connect Base Support to appliance, and termination are sold separately.

Nominal Diameter	Part
3" (80)	IFCKC03
4" (110)	IFCKC04

Kit contains Base Support, Chimney Cover, Flex End Pipe, Connector Rings, Spacers and Centrocerin.

Terminations



Chimney Cover PP-UV

This termination incorporates a combustion air intake and flue gas termination in a single assembly. Cover seals top of the chimney or chase. Use with End Pipe or Flex End Pipe. End Pipes sold separately.

Nominal Diameter	Part	Length A	Height B
2" (60)	ISCP02	15.8 (400)	9.6 (245)
3" (80)	ISCP03	15.8 (400)	9.6 (245)
4" (110)	ISCP04	15.8 (400)	9.6 (245)

Available

Custom Chimney Cover PP-UV

Custom Chimney Cover sizes available, including multiple flue versions. Call with size requirements for pricing.



2" Flex End Pipe

Terminates InnoFlue® Flex at top of chimney. Used in combination with Chimney Cover PPs-UV or B-Vent Cap

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2" (60)	IFEP02	5.3 (135)	4.1 (105)	3.9 (99)



3" and 4" Flex End Pipe

Terminates InnoFlue® Flex at top of chimney. Used in combination with Chimney Cover PPs-UV or B-Vent Cap

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
3" (80)	IFEP03	7.1 (180)	3.3 (84)	3.9 (100)
4" (110)	IFEP04	10.0 (253)	3.5 (89)	5.2 (132)



Universal B-Vent Cap

Allows for multiple flue configurations. Utilize existing B-Vent as a chase. Clean, professional and aesthetically pleasing. Installs quickly and easily.

Part	Length	Height	Width
IAUBVC	10"	10"	10"




One Part Multiple Configurations

Concentric


Concentric

Typical configurations

- 4 IASCM: Support Clamp
- 6 IAWP: Wall Plate
- 15 ICRT: Concentric Roof Termination
- 31 ICTP: Concentric Test Port
- 32 ICEL45: Concentric 45° Elbow
- 33 ICVL: Concentric Vent Length
- 34 ICEL87: Concentric 87° Elbow
- 35 ICWT: Concentric Wall Termination PP

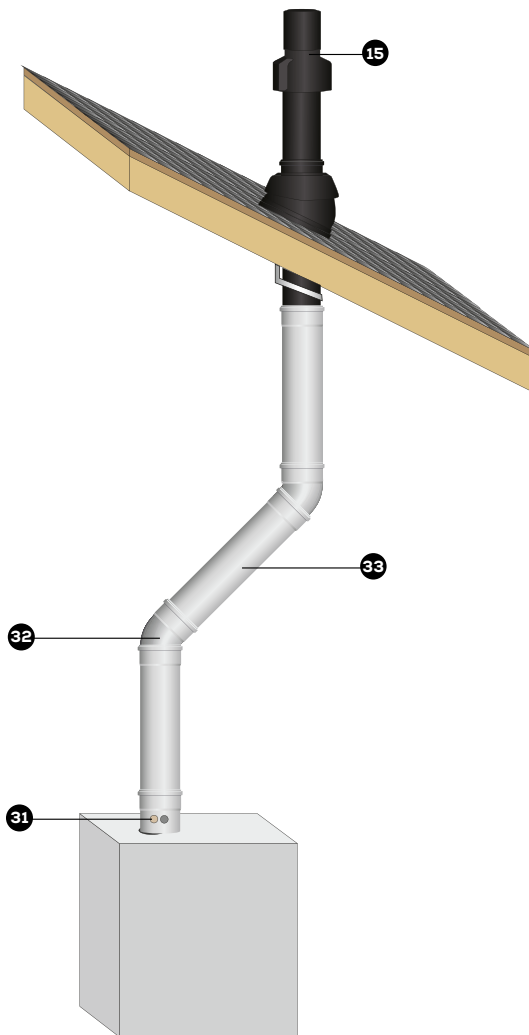

InnoFlue® Concentric installations where combustion air and air intake points are co-located above the roof line.

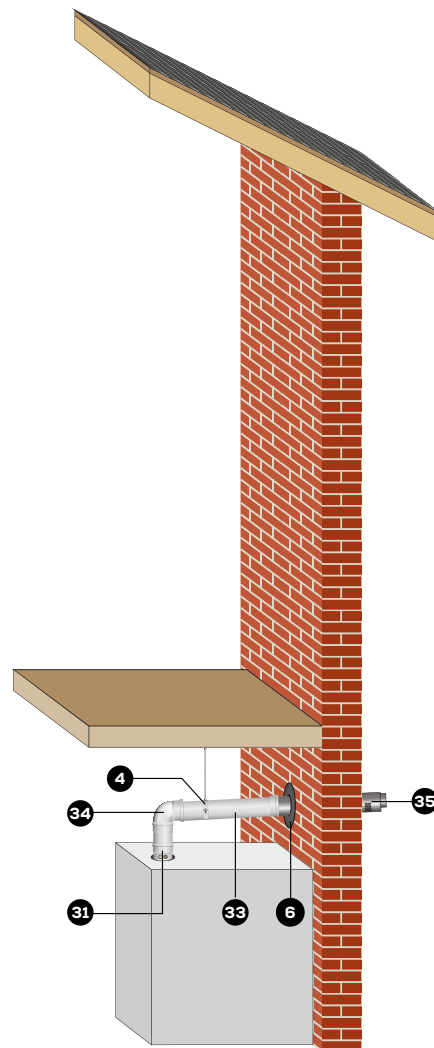

InnoFlue® Concentric installations where combustion air and air intake points are co-located.


Concentric Adaptors



Concentric Centric Increaser

Transitions from one diameter to a larger diameter. Install in vertical orientation only.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
4"/6" (100/150mm)	ICIA10015046	6.0 (163)	4.1 (105)	6.8 (173)
4"/6" (110/150mm)	ICIA11015046	6.0 (163)	4.1 (105)	6.8 (173)



Twin Pipe/Concentric Reversible Adaptor

Reversible adaptor transitions between InnoFlue® Single Wall and Concentric. Reducer and vent length included.


Nominal Diameter	Part	Overall Length A	Effective Length B	Offset C
2"/4" (60/100)	ITCR24	16.4 (411)	12 (305)	4.76 (120)



Reversible Concentric / Twin Pipe Adaptor

Transitions Concentric to twin pipe Single Wall.

Nominal Diameter	Part	Overall Length A	Effective Length B	Offset C
3"/5" (80/125)	ICCT3503	9.8 (250)	5.9 (150)	4.8 (121)




Twin Pipe to Concentric Adaptor

Transitions twin pipe Single Wall to Concentric.

Nominal Diameter	Part	Overall Length A	Effective Length B
4"/6" (110/160)	ICTC0446	14.5 (316)	10.0 (25.3)

Concentric

Condensate Management



Concentric Horizontal Drain Tee

Use to drain condensate from the vent system. Install in horizontal section closest to appliance.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C	Drain O.D. D
2"/4" (60/100)	ICHDT24	7.9 (200)	5.9 (150)	4.4 (112)	1.4 (32)
3"/5" (80/125)	ICHDT35	7.9 (200)	5.9 (150)	5.5 (139)	1.4 (32)
4"/6" (110/160)	ICHDT46	7.9 (200)	5.9 (150)	6.8 (173)	1.4 (32)



Universal Ball Valve Siphon

Attaches to any InnoFlue® drain. Allows condensates to flow while unique ball valve assures combustion gases remain contained at higher temperatures. Comes with and can be installed with a barbed or compression fitting. See configuration options below.

Part	Overall Height A	Width B	Length C
IASJBVS	6.5	4.5	1.9



Standard



Barbed



NRV

Concentric Test Ports



Concentric Test Port

Installed immediately above the appliance, the test port allows plumbing and heating professionals to sample flue gases and ensure the appliance is operating at optimum efficiency.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2"/4" (60/100)	ICTP24	6.7 (170)	4.3 (110)	4.4 (112)
3"/5" (80/125)	ICTP35	6.7 (170)	4.3 (110)	5.5 (139)
4"/6" (110/160)	ICTP46	8.1 (207)	5.6 (143)	6.8 (173)

Concentric Vent Lengths



Concentric Vent Lengths

Rigid polypropylene vent lengths with metal outer and dedicated male and female ends. Female end contains internal gasket and male ends can be field cut and chamfered to desired length.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
2"/4" (60/100)	ICVL241	14.5 (368)	12 (305)	4.4 (112)
2"/4" (60/100)	ICVL242	26.5 (673)	24 (610)	4.4 (112)
2"/4" (60/100)	ICVL243	38.5 (978)	36 (914)	4.4 (112)
3"/5" (80/125)	ICVL351	14.5 (368)	12 (305)	5.5 (139)
3"/5" (80/125)	ICVL352	26.5 (673)	24 (610)	5.5 (139)
3"/5" (80/125)	ICVL353	38.5 (978)	36 (914)	5.5 (139)
4"/6" (110/160)	ICVL461	14.5 (368)	12 (305)	6.8 (173)
4"/6" (110/160)	ICVL462	26.5 (673)	24 (610)	6.8 (173)
4"/6" (110/160)	ICVL463	38.5 (978)	36 (914)	6.8 (173)

Concentric


Elbows



Concentric 45° Elbow

For offsets or changes in the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
2"/4" (60/100)	ICEL2445	.7 (18)	3.3 (85)	4.4 (112)
3"/5" (80/125)	ICEL3545	1.3 (34)	4.6 (117)	5.5 (139)
4"/6" (110/160)	ICEL4645	1.5 (39)	5.2 (133)	6.8 (173)



Concentric 87° Elbow

For offsets or changes in the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
2"/4" (60/100)	ICEL2487	2.0 (50)	4.8 (123)	4.4 (112)
3"/5" (80/125)	ICEL3587	3.1 (79)	5.1 (129)	5.5 (139)
4"/6" (110/160)	ICEL4687	4.4 (111)	6.5 (165)	6.8 (173)

Roof Flashing



Concentric Roof Flashing

Concentric PPs roof flashing creates water-tight roof penetration when using InnoFlue® Concentric.

Nominal Diameter	Part	Overall Length A	O.D. B
2"/4" (60/100) / 3"/5" (80/125)	ICRF2435		
4"/6" (110/160)	ICRF46		

Terminations



Concentric Roof Termination

Roof Termination combines flue gas termination and combustion air intake. Use with InnoFlue® Concentric or with InnoFlue® SW by adding an ICTC Adapter. Includes support clamp.


Nominal Diameter	Part	Overall Length A	Roof Line B	Max O.D. C
2"/4" (60/100)	ICRT2439	39.4 (1000)	20.5 (520)	6.5 (166)
3"/5" (80/125)	ICRT3539	39.4 (1000)	20.5 (520)	6.5 (166)
4"/6" (110/160)	ICRT4679	78.7 (2000)	23.6 (600)	6.5 (166)



Concentric Wall Termination

Made from PPs-UV outer and PPs-UV inner, the Concentric Wall termination incorporates flue gas termination and combustion air intake. Use with InnoFlue® Concentric or with InnoFlue® SW by adding an ICTC Adapter. Includes support clamp and wall plates.

Nominal Diameter	Part	Overall Length A	O.D. B
2"/4" (60/100)	ICWT242	21.2 (538)	5.54 (141)
3"/5" (80/125)	ICWT352	28.3 (719)	5 (125)



Concentric Wall Termination

Made from PPs-UV outer and PPs-UV inner, the Concentric Wall termination incorporates flue gas termination and combustion air intake. Use with InnoFlue® Concentric or with InnoFlue® SW by adding an ICTC Adapter. Includes support clamp and wall plates.

Nominal Diameter	Part	Overall Length A	O.D. B
4"/6" (110/160)	ICWT462	32.0 (813)	6.3 (160)

Concentric Kits



Concentric Kit Horizontal

Concentric Side Wall Venting Kit contains components needed to vent wall mounted appliance to wall termination. Additional components may be required for longer runs and are sold separately.

Nominal Diameter	Part
2"/4" (60/100)	ICVKH24
3"/5" (80/125)	ICVKH35
4"/6" (110/160)	ICVKH46

Kit includes one 3' Concentric Vent Length, Concentric Elbow, Concentric Wall Termination, Wall Plates and Support Clamp.



Concentric Kit Vertical

Concentric Vertical Venting Kit contains components needed to vent vertically through roof. Additional components may be required for longer runs and are sold separately.

Nominal Diameter	Part
2"/4" (60/100)	ICVKV24
3"/5" (80/125)	ICVKV35
4"/6" (110/160)	ICVKV46

Kit includes one 2' and one 3' Concentric Vent Length, Concentric Roof Termination, one Wall Plate and Support Clamp.


Accessories



Wall Plate

Provides an aesthetically pleasing and water tight finish at wall penetrations when sealed with field-supplied silicone.

Nominal Diameter	Part	Overall Diameter A	Width of Opening B
4" (100)	IAWP100B	5.6 (142)	4" (100)
5" (125)	IAWP05B	8.9 (226)	5" (125)



Support Clamp

Used as vertical or horizontal support. Space 78" in vertical and 39" in horizontal installations. Uses 3/8" threaded rod.


Nominal Diameter	Part#	Overall Length A	Height B
4" (100)	IASCM100	5.3 (134.6)	1.1 (28)
5" (125)	IASCM05	5.8 (147.3)	1.1 (28)
6" (160)	IASCM06	6.8 (172.7)	1.1 (28)

Commercial SW



Typical configurations

- 2 ISEL87: 87° Elbow
- 3 ISVL: Vent Length
- 4 IASCM: Support Clamp
- 5 IANS: Connector Ring*
- 6 IAWP: Wall Plate
- 7 ISEP: End Pipe PPs-UV
- 9 IASPP: Bird Screen PPs-UV
- 12 ISAGL or ISAAL: Appliance Adaptor
- 19 ISTP: Test Port
- 20 ISHDF: Horizontal Drain Fitting
- 21 IALJS: Siphon
- 22 ISBT: Branch Tee
- 23 ISEL0430: 30° Elbow
- 24 ISBS: Base Support
- 25 IASP: Spacer
- 26 ISCM: Chimney Cover SS w/PPs-UV End Pipe

*where required

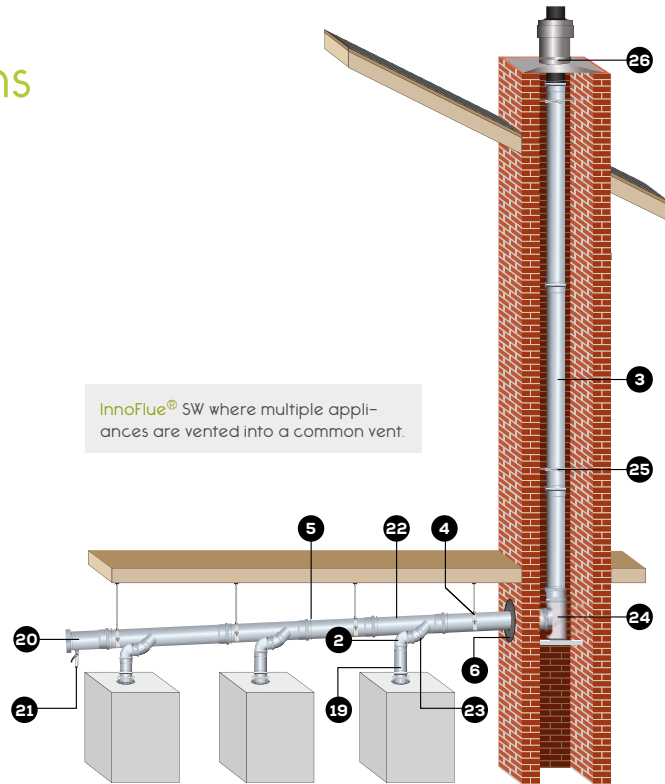


Commercial SW

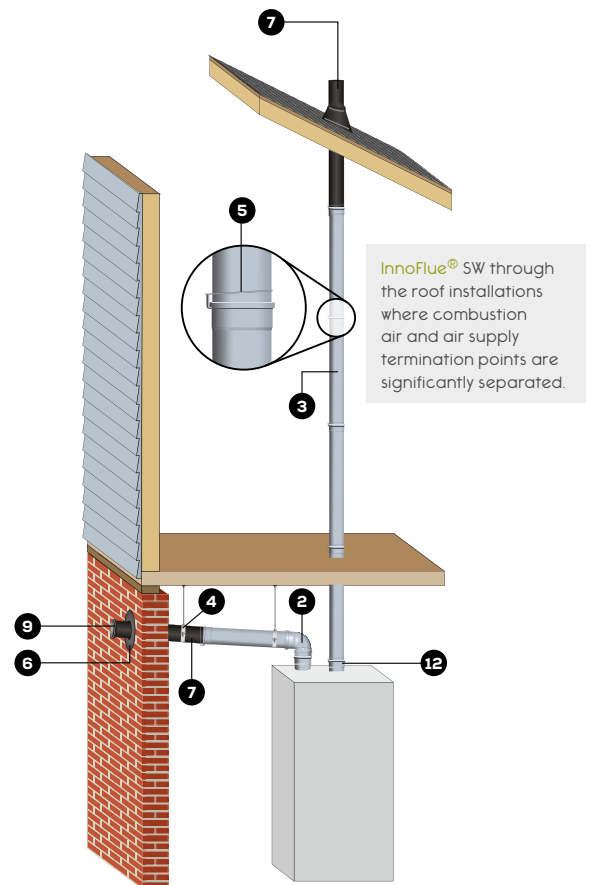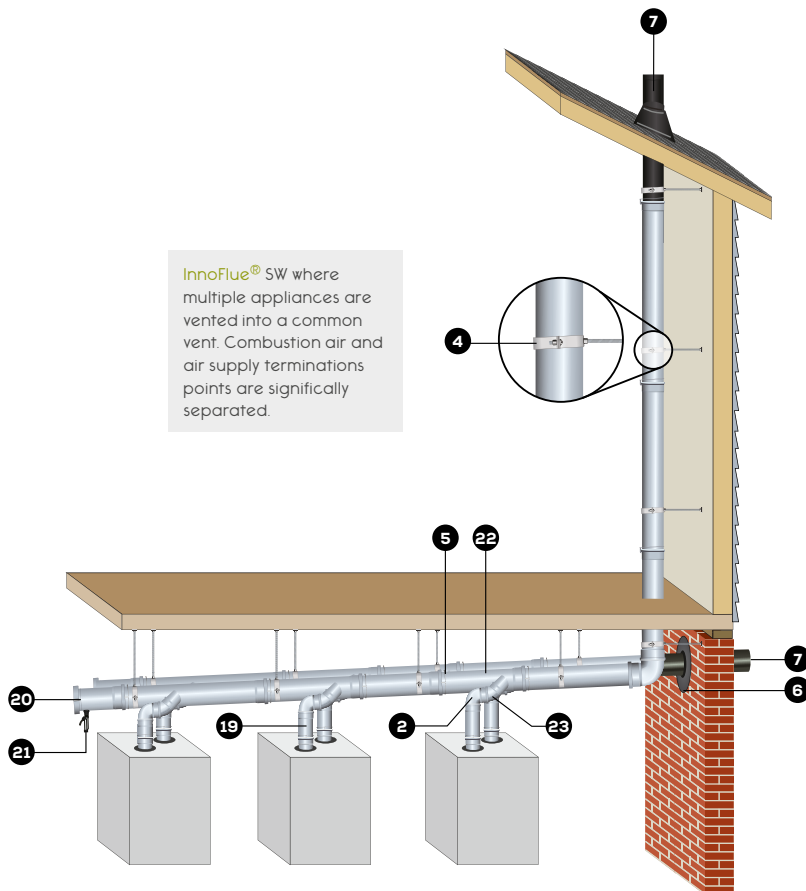

Appliance Adaptors


Commercial appliance adaptors are made to order. Adaptors can be manufactured to fit any appliance. Call Centrotherm or visit www.centrotherm.us.com for a complete list of approved appliances.



Commercial Appliance Adaptor for Coupler Style Flue Collar

Adapts a female PVC / CPVC coupler or appliance flue exhaust to InnoFlue® SW diameters.

Nominal Diameter PVC to PP	Part	Overall Length A	Max O.D. B
6"/6" (168/160)	ISAGL0606	7.6 (194)	7.0 (178)



Commercial Appliance Adaptor for Flue Collar with Hose Clamp

Adapts a female PVC / CPVC diameter appliance flue exhaust (with integrated gasket) to InnoFlue® SW diameters.

Nominal Diameter PVC to PP	Part	Overall Length A	Max O.D. B
6"/6" (168/160)	ISAAL0606	7.6 (194)	7.0 (178)



Commercial Appliance Adaptor w/ Condensate Drain and Vibration Isolation Boot OEM to InnoFlue®

Adapts boilers to InnoFlue®. Other increasing size combinations available upon request.

Nominal Diameter	Part	Overall Length A	Maximum OD B	Effective Length C
4" (110)	ISAACD0404	10.3 (262)	5.9 (150)	3.4 (86)
5" (125)	ISAACD0505	13.6 (345)	6.5 (165)	8.5 (216)
6" (160)	ISAACD0606	12.0 (305)	7.9 (201)	5.4 (137)
7" (180) to 8" (200)	ISAACD0708	16.5 (419)	9.5 (241)	9.7 (246)
8" (200)	ISAACD0808	16.5 (419)	9.5 (241)	9.7 (246)
9" (230) to 10" (250)	ISAACD0910	16.9 (429)	11.4 (290)	10.0 (254)
10" (250)	ISAACD1010	16.9 (429)	11.4 (290)	10.0 (254)
12" (315)	ISAACD1212	23.3 (542)	14.7 (373)	7.6 (191)

Commercial Flanged Appliance Adaptor OEM to InnoFlue®			
Adapts InnoFlue® with bolt down flanged adaptor. Available for purchase through Centrotherm.			
Nominal Diameter	Part	Overall Length A	Maximum OD B
3" (80)	ISAFLG03	3.7 (94)	8.8 (224)
4" (110)	ISAFLG04	4.7 (119)	8.8 (224)
6" (160)	ISAFLG06	4.3 (109)	8.8 (224)
8" (200)	ISAFLG08	6.2 (158)	11.3 (287)
10" (250)	ISAFLG10	6.2 (157)	15.0 (381)
12" (315)	ISAFLG12	13.2 (335)	15.0 (381)

Commercial Appliance Adaptor OEM to InnoFlue®			
Adapts boilers to InnoFlue®.			
Nominal Diameter	Part	Overall Length A	Max O.D. B
7" (180) to 8" (200)	ISAF0708	9.0 (229)	8.8 (224)
8" (200)	ISAF0808	8.0 (204)	8.8 (224)
10" (250)	ISAF1010	8.0 (204)	10.8 (27)

Commercial Appliance Adaptor SS to InnoFlue®				
Adapts stainless steel flue outlets to InnoFlue®. May require Vibration Isolation Boot.				
Nominal Diameter SS to PP	Part	Overall Length A	Effective Length B	Max O.D. C
6"/6" (152/160)	ISSA0606	7.3 (185)	4.2 (107)	7.8 (183)
7" (180) to 8" (200)	ISSA0708	8.7 (221)	6.1 (155)	8.8 (224)
8"/8" 203/200	ISSA0808	8.9 (226)	5.0 (127)	8.8 (224)
10"/10" (254/250)	ISSA1010	8.9 (226)	5.0 (127)	10.7 (272)
12"/12" (305/315)	ISSA1212	16.9 (429)	4.2 (107)	13.8 (350)

Vibration Isolation Boot with Clamps			
High temperature silicone boot seals InnoFlue® SW Vent Lengths and Fittings to appliance flue outlet.			
Nominal Diameter PVC to PP	Part	Width	ID
6" (160)	ISVIB06	2.4 (60)	6.3 (160)
8" (200)	ISVIB08	2.4 (60)	7.9 (200)
10" (250)	ISVIB10	2.4 (60)	9.8 (250)
12" (315)	ISVIB12	2.4 (60)	12.4 (315)

Available

Custom Appliance Adaptors

Appliance Adaptors are built to order. Contact your sales representative for pricing and availability. www.centrotherm.us.com

Increasers & Reducers



Centric Increaser

Transitions vent system to a larger diameter. Install in vertical orientation only. Additional configurations available upon request.


Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
4"/6" (110/160)	ISIA0406	7.6 (193)	4.8 (122)	7.2 (183)
5"/6" (125/160)	ISIA0506	7.2 (185)	4.3 (110)	7.2 (185)
6"/6" (150/160)	ISIA15006	7.7 (196)	4.9 (124)	7.2 (183)
6"/8" (160/200)	ISIA0608	10.4 (265)	6.5 (165)	8.8 (224)
6"/12" (160/315)	ISIA0612	18.1 (460)	5.4 (137)	13.8 (351)
8"/10" (200/250)	ISIA0810	11.6 (295)	7.7 (195)	10.7 (272)
10"/12" (250/315)	ISIA1012	18.2 (463)	5.5 (141)	13.8 (350)
300mm/12" (300/315)	ISIA30012			



Eccentric Increaser

Transitions vent system to a larger diameter. Install in horizontal or vertical orientation. Other size combinations available upon request.


Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
4"/6" (110/160)	ISEI0406	9.2 (234)	6.4 (163)	7.2 (183)
5"/6" (125/160)	ISEI0506	7.2 (185)	4.3 (108)	7.2 (183)
6"/8" (160/200)	ISEI0608	10.4 (265)	6.5 (165)	8.8 (224)
6"/12" (160/315)	ISEI0612	18.1 (460)	5.4 (137)	13.8 (350)
8"/10" (200/250)	ISEI0810	11.8 (300)	7.8 (200)	10.7 (272)
8"/12" (200/315)	ISEI0812	16.9 (429)	4.2 (107)	13.8 (350)
10"/12" (250/315)	ISEI1012	20.2 (514)	7.8 (200)	13.8 (350)



Reducer

Transitions vent system to a smaller diameter.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
8"/6" (200/160)	ISRD0806	8.0 (204)	5.2 (133)	7.9 (201)
10"/8" (250/200)	ISRD1008	9.2 (234)	5.2 (133)	9.9 (252)
12"/10" (315/250)	ISRD1210	17.9 (455)	14.0 (356)	12.5 (318)




Tapered Reducer

Transitions vent system to a smaller diameter with minimal back pressure. Other sizes available. Please contact Centrotherm.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
8"/6" (200/160)	ISTR0806	13.5 (343)	10.7 (272)	7.9 (200)
10"/6" (250/160)	ISTR1006	18.5 (409)	16.3 (414)	9.9 (250)
10"/8" (250/200)	ISTR1008	16.6 (422)	12.6 (320)	9.9 (250)

Test Port




Test Port

Installed immediately above the appliance, the test port allows plumbing and heating professionals to sample flue gases and ensure the appliance is operating at optimum efficiency.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
6" (160)	ISTP06	12.7 (323)	9.8 (250)	7.2 (183)
8" (200)	ISTP08	15.9 (405)	12.0 (305)	8.8 (224)
10" (250)	ISTP10	15.9 (405)	12.0 (305)	10.7 (272)
12" (315)	ISTP12	36.7 (932)	24 (610)	13.8 (350)

Vent Lengths

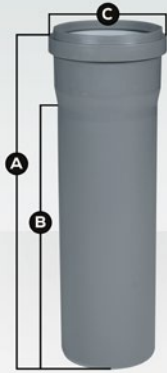

Rigid Vent Length

Rigid polypropylene vent lengths with dedicated male and female ends. Female ends contain internal gasket and male ends can be field cut and chamfered to desired length.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
6" (160)	ISVL061	15.5 (345)	12 (305)	7.2 (183)
6" (160)	ISVL062	27.5 (700)	24 (610)	7.2 (183)
6" (160)	ISVL063	39.5 (1004)	36 (914)	7.2 (183)
6" (160)	ISVL066	75.5 (1919)	72 (1829)	7.2 (183)
6" (160)	ISVL0610	124.25 (3162)	120 (3048)	7.2 (183)
8" (200)	ISVL081	16.2 (412)	12 (305)	8.8 (224)
8" (200)	ISVL082	28.2 (716)	24 (610)	8.8 (224)
8" (200)	ISVL083	40.2 (1021)	36 (914)	8.8 (224)
8" (200)	ISVL086	76.2 (1935)	72 (1829)	8.8 (224)
8" (200)	ISVL0810	124.5 (3162)	120 (3048)	8.8 (224)
10" (250)	ISVL101	16.1 (410)	12 (305)	10.7 (272)
10" (250)	ISVL102	28.1 (715)	24 (610)	10.7 (272)
10" (250)	ISVL103	40.1 (1019)	36 (914)	10.7 (272)
10" (250)	ISVL106	76.1 (1934)	72 (1829)	10.7 (272)
12" (315)	ISVL122	36.7 (932)	24 (610)	13.8 (350)
12" (315)	ISVL123	48.7 (1236)	36 (914)	13.8 (350)
12" (315)	ISVL126	84.7 (2151)	72 (1829)	13.8 (350)


Elbows and Tees



15° Elbow

For offsets or changes the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
6" (160)	ISEL0615	1.0 (25)	5.1 (130)	7.2 (183)
10" (250)	ISEL1015	1.9 (48)	10.6 (269)	10.7 (272)
12" (315)	ISEL1215	4.4 (112)	18.7 (475)	13.8 (350)



8" Zero Radius 15° Elbow

For offsets or changes in the direction of the vent system.

Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C	Zeta Value
8" (160)	ISELS0815	1.18 (30)	5.55 (232)	9.1 (232)	.10


30° Elbow				
For offsets or changes in the direction of the vent system.				
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
6" (160)	ISEL0630	2.1 (53)	5.8 (147)	7.2 (183)
10" (250)	ISEL1030	4.3 (109)	12.6 (320)	10.7 (272)
12" (315)	ISEL1230	9.3 (21.4)	21.4 (544)	13.8 (350)

8" Zero Radius 30° Elbow					
For offsets or changes in the direction of the vent system.					
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C	Zeta Value
8" (160)	ISELS0830	2.6 (67)	6.46 (164)	9.1 (232)	.20

45° Elbow				
For offsets or changes in the direction of the vent system.				
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
6" (160)	ISEL0645	3.2 (81)	5.5 (138)	7.2 (183)
10" (250)	ISEL1045	4.1 (105)	14.3 (364)	10.7 (272)
12" (315)	ISEL1245	5.5 (139)	23.6 (599)	13.8 (350)

8" Zero Radius 45° Elbow					
For offsets or changes in the direction of the vent system.					
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C	Zeta Value
8" (200)	ISELS0845	4.3 (115)	7.22 (183)	9.1 (232)	.40

87° Elbow				
For offsets or changes in the direction of the vent system.				
Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C
6" (160)	ISEL0687	3.4 (86)	6.3 (160)	7.2 (183)
10" (250)	ISEL1087	11.3 (287)	15.7 (399)	10.7 (272)
12" (315)	ISEL1287	14.3 (364)	25.7 (653)	13.8 (350)



8" Zero Radius 87° Elbow

For offsets or changes in the direction of the vent system.


Nominal Diameter	Part	Centerline Offset A	Effective Length B	Max O.D. C	Zeta Value
8" (200)	ISELS0887	12.4 (316)	8.3 (212)	9.1 (232)	.96



Tee Cap

Seals non-utilized tees and branch tees.

Nominal Diameter	Part	Max O.D. A
6" (160)	ISTC06	7.3 (185)
8" (200)	ISTC08	8.8 (224)
10" (250)	ISTC10	10.7 (272)
12" (315)	ISTC12	13.8 (350)




Tee

Use to change the direction of the vent system, combine multiple appliances, and capture condensates at base of long vertical runs.

Nominal Diameter	Part	Effective Length A	Effective Length B	Effective Length C
6" (160)	IST06	6.6 (168)	11.2 (284)	4.1 (105)
8" (200)	IST08	8.5 (215)	15.2 (387)	6.5 (165)
10" (250)	IST10	16.5 (419)	16.5 (420)	7.0 (179)
12" (315)	IST12	19.7 (500)	28.7 (728)	7.5 (189.5)

Base Supports




Base Support

Supports vertical sections of rigid (up to 164') vent lengths installed in chimneys and chases.

Nominal Diameter	Part	Base Length A	Height B	Max O.D. C	Effective D	Effective E
6" (160)	ISBS0687	15.8 (400)	13.2 (335)	7.2 (183)	3.7 (93)	6.1 (156)
8" (200)	ISBS0887	15.8 (400)	22.7 (577)	8.8 (224)	10.2 (260)	13.5 (342)
10" (250)	ISBS1087	27.6 (700)	29.5 (750)	10.7 (272)	12.1 (307)	15.1 (383)
12" (315)	ISBS1287	27.6 (700)	46.9 (1191)	13.8 (350)	15.7 (398)	24.9 (633)

Common Venting and Condensate Management

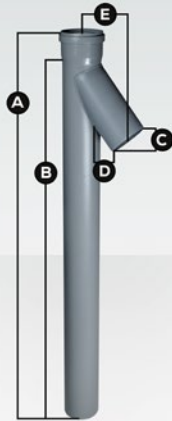

Branch Tees

42° Y allows for the cascading or common venting of appliances.
Other size configuration available upon request.

Nominal Diameter	Part	Overall Length A	Effective Length B	Feeder Diameter C	Feeder Length D	Offset E
3" (80)	ISBT030236	40.4 (1026)	36 (914)	2" (60)	6 (152)	6.5 (165)
4" (100)	ISBT040236	38.8 (986)	36 (914)	2" (60)	6 (152)	7.3 (185)
4" (100)	ISBT040336	38.8 (986)	36 (914)	3" (80)	6 (152)	7.5 (191)
5" (125)	ISBT050236	39.1 (993)	36 (914)	2" (60)	6 (152)	7.6 (193)
5" (125)	ISBT050336	39.1 (993)	36 (914)	3" (80)	6 (152)	7.9 (201)
5" (125)	ISBT050436	39.1 (993)	36 (914)	4" (100)	6 (152)	8.3 (211)
6" (160)	ISBT060236	40 (1016)	36 (914)	2" (60)	6 (152)	8.3 (211)
6" (160)	ISBT060336	40 (1016)	36 (914)	3" (80)	6 (152)	8.6 (218)
6" (160)	ISBT060436	40 (1016)	36 (914)	4" (100)	6 (152)	9 (229)
6" (160)	ISBT060536	40 (1016)	36 (914)	5" (125)	6 (152)	9.2 (234)
8" (200)	ISBT080236	40 (1016)	36 (914)	2" (60)	6 (152)	9.1 (231)
8" (200)	ISBT080336	40 (1016)	36 (914)	3" (80)	6 (152)	9.4 (239)
8" (200)	ISBT080436	40 (1016)	36 (914)	4" (100)	6 (152)	9.8 (249)
8" (200)	ISBT080536	40 (1016)	36 (914)	5" (125)	6 (152)	10 (254)
8" (200)	ISBT080636	40 (1016)	36 (914)	6" (160)	6 (152)	10.6 (269)
10" (250)	ISBT100236	39.9 (1013)	36 (914)	2" (60)	6 (152)	10.1 (257)
10" (250)	ISBT100336	39.9 (1013)	36 (914)	3" (80)	6 (152)	10.3 (262)
10" (250)	ISBT100436	39.9 (1013)	36 (914)	4" (100)	6 (152)	10.8 (274)
10" (250)	ISBT100536	39.9 (1013)	36 (914)	5" (125)	6 (152)	11 (279)
10" (250)	ISBT100636	39.9 (1013)	36 (914)	6" (160)	6 (152)	11.7 (297)
10" (250)	ISBT100836	39.9 (1013)	36 (914)	8" (200)	6 (152)	12.1 (307)
12" (315)	ISBT120236	49 (1245)	36 (914)	2" (60)	6 (152)	11.1 (282)
12" (315)	ISBT120336	49 (1245)	36 (914)	3" (80)	6 (152)	11.3 (287)
12" (315)	ISBT120436	49 (1245)	36 (914)	4" (100)	6 (152)	11.7 (297)
12" (315)	ISBT120536	49 (1245)	36 (914)	5" (125)	6 (152)	11.8 (300)
12" (315)	ISBT120636	49 (1245)	36 (914)	6" (160)	6 (152)	12.2 (310)
12" (315)	ISBT120836	49 (1245)	36 (914)	8" (200)	6 (152)	12.6 (320)
12" (315)	ISBT121036	49 (1245)	36 (914)	10" (250)	6 (152)	13.1 (333)

Available

Custom Branch Tees

Branch Tees can be made to order using a variety of diameter manifolds and feeders.

Available

Cascade Component Kits


Available in various sizes and configurations.
Contact your sales representative for more information.

Common Vent Kit Example:

Horizontal Drain Tee

Use to drain condensate from the vent system. Install in horizontal section closest to appliance.
1.26" (32mm) O.D. drain. Use with any InnoFlue® Siphon.


Nominal Diameter	Part	Drain O.D. A	Effective Length B	Max O.D. C	Overall Length D
2" (60)	ISHDT02	1.3 (32)	7.3 (186)	3 (76)	9.8 (250)
3" (80)	ISHDT03	1.3 (32)	7.3 (186)	3.7 (94)	9.8 (250)
4" (110)	ISHDT04	1.3 (32)	9.8 (250)	4.1 (129)	12.4 (315)
5" (125)	ISHDT05	1.3 (32)	9.8 (250)	5.8 (146)	12.4 (315)
6" (160)	ISHDT06	1.3 (32)	9.8 (250)	7.2 (183)	12.4 (315)
8" (200)	ISHDT08	1.3 (32)	12.0 (305)	8.8 (224)	16.0 (405)
10" (250)	ISHDT10	1.3 (32)	12.0 (305)	10.7 (272)	16.0 (405)
12" (315)	ISHDT12	1.3 (32)	24.0 (1610)	13.8 (350)	36.7 (1932)



Horizontal Drain Fitting

Use with any InnoFlue® siphon. Placed at the end of the last Branch Tee in a cascade configuration, the Horizontal Drain Fitting removes condensate from the system and allows for inspections and system clean out. 32mm O.D. drain.

Nominal Diameter	Part	Drain O.D. A	Effective Length B	Max O.D. C	Overall Length D
4" (110)	ISHDF04	1.3 (32)	7.2 (182)	5.1 (129)	9.7
5" (125)	ISHDF05	1.3 (32)	7.4 (187)	5.8 (146)	11.3
6" (160)	ISHDF06	1.3 (32)	8.1 (209)	7.2 (183)	12.1
8" (200)	ISHDF08	1.3 (32)	8.5 (215)	8.8 (224)	12.7
10" (250)	ISHDF10	1.3 (32)	13.8 (350)	10.7 (272)	18.0
12" (315)	ISHDF12	1.3 (32)	6.3 (160)	13.8 (350)	19.0



Tee Cap with Drain

Use with any InnoFlue® siphon to drain condensate from the vent system.


Nominal Diameter	Part	Overall Length A	Max O.D. B
6" (160)	ISTCD06	6.9 (175)	7.2 (185)
8" (200)	ISTCD08	8.9 (225)	8.8 (224)
10" (250)	ISTCD10	8.9 (225)	10.7 (273)
12" (315)	ISTCD12	16.0 (407)	13.8 (351)




Universal Ball Valve Siphon

Attaches to any InnoFlue® drain. Allows condensates to flow while unique ball valve assures combustion gases remain contained at higher temperatures. Comes with and can be installed with a barbed or compression fitting. See configuration options below.

Part	Overall Height A	Overall Length B	Overall Width C
IASJBVS	6.5	4.5	1.9



Standard




Barbed



NRV

Terminations

NOTE: Roof Flashings Require a 10 Day Lead Time

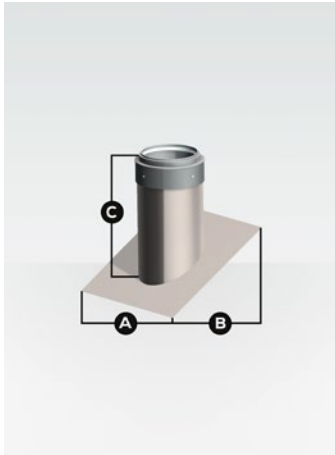


Pitched Roof Flashing

With field supplied sealant, stainless steel flashing creates water-tight roof penetration when using InnoFlue commercial on a pitched roof.

Nominal Diameter	Part	Length A	Width B	Height C
6"	IAPRF06	18"	*	*
8"	IAPRF08	20"	*	*
10"	IAPRF10	22"	*	*
12"	IAPRF12	24"	*	*
				*Dimensions vary based on pitch.


Indicate required pitch at time of order

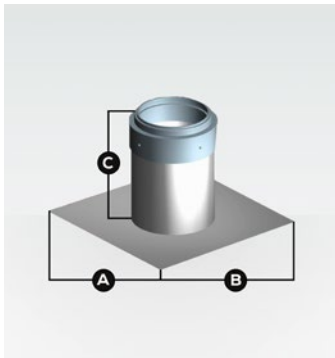

Flat Roof Flashing

With field supplied sealant, stainless steel flashing creates water-tight roof penetration when using InnoFlue commercial on a flat roof.


Nominal Diameter	Part	Length A	Width B	Height C
6"	IAFRF06	18"	18"	13.3"
8"	IAFRF08	20"	20"	13.3"
10"	IAFRF10	22"	22"	13.8"
12"	IAFRF12	24"	24"	14.3"



Chimney Cover SS with PPs-Gray End Pipe

Stainless steel termination with polypropylene end pipe seals top of the chimney or chase.


Nominal Diameter	Part	Length A	Width B	Height C
6"	ISCM06	15.8	15.9	16.7
8"	ISCM08	19.7	19.7	19.7
10"	ISCM10	20	20	20
12"	ISCM12	20	20	39.4

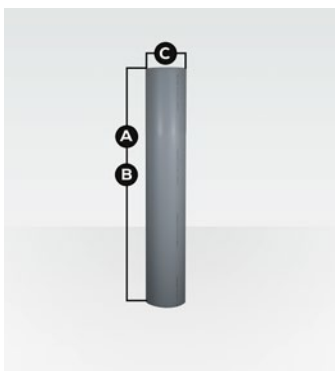

End Pipe PPs-Gray

PPs End Pipes allow for termination of the vent system through the wall or roof.

Nominal Diameter	Part	Overall Length A	Effective Length B	Max O.D. C
6" (160)	ISEP0620	20 (508)	20 (508)	6 (160)
6" (160)	ISEP0639	39 (991)	39 (991)	6 (160)
8" (200)	ISEP086	70 (1778)	70 (1778)	8 (200)
10" (250)	ISEP106	70 (1778)	70 (1778)	10 (250)
12" (315)	ISEP126	72 (1829)	72 (1829)	12 (315)

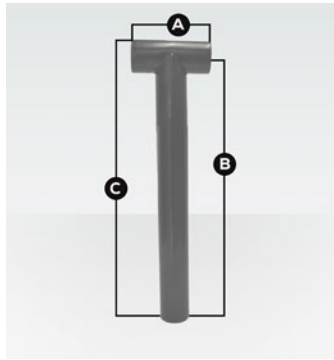

Termination Tee (long)

Made from polypropylene. Use where termination is exposed to excessive sunlight, wind or prone to freeze ups.


Nominal Diameter	Part	Length A	Width B	Height C
6"	ISTT0620	9	6.5	30.8
8"	ISTT0820	16	7.9	32
10"	ISTT1020	20.5	9.9	32.3
12"	ISTT1220	22	12.4	41.5



Velocity Cone

Made to order. Call for more information.

Nominal Diameter	Part
3" to 2"	ISVC0302
4" to 3"	ISVC0403
5" to 4"	ISVC0504
6" to 4"	ISVC0604
6" to 5"	ISVC0605
8" to 6"	ISVC0806
10" to 6"	ISVC1006
10" to 8"	ISVC1008



PPs to PVC Termination Kit

Adapts PPs to PVC Twin Pipe Termination. Comes with replacement wall plate and termination adaptor.

Nominal Diameter	Part	Overall Length A	Effective Length B	End O.D. C
6" (160)	ISLTK06	14.4 (366)	11.0 (280)	6.5 (166)

Accessories



Bird Screen PP-UV

Fits inside InnoFlue® SW end pipes at terminations.


Nominal Diameter	Part
6" (160)	IASPP06



Bird Screen SS

Fits inside InnoFlue® SW end pipes at terminations.

Nominal Diameter	Part
8" (200)	IASSS08
10" (250)	IASSS10
12" (315)	IASSS12



6" Spacers

Self positioning spacers centers InnoFlue® SW in a chase/chimney/B-vent.


Nominal Diameter	Part	Max Width A	Min Width
6" (160)	IASP06	25.0 (635)	7 (186)



8", 10" and 12" Spacers

Self positioning spacers centers InnoFlue® SW in a chase/chimney/B-vent.


Nominal Diameter	Part	Max Width A*	Min Width
8" (200)	IASP08	27.6 (700)	9 (228)
10" (250)	IASP10	29.5 (750)	11 (276)
12" (315)	IASP12	32.1 (815)	13 (341)
		* When bent into place	



Flue Clamp

Secures ISAG and ISAGL appliance adaptors to appliance flue exhaust.

Nominal Diameter	Part	Height A	Max. I.D. B
6" (160)	IAFC06	1.0 (26)	8.3 (211)

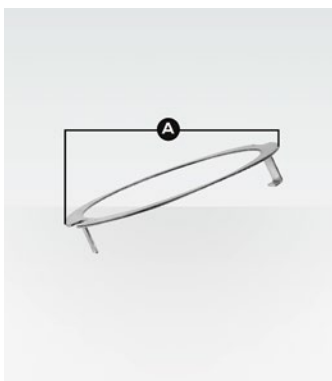

Connector Ring

Provides reinforcement at joints to support loads of up to 99 lbs (45Kg). 6' through 12' connector rings are available but not required per UL 1738 and ULC-S636.

Nominal Diameter	Part	O.D. A
6" (160)	IANS06	7.5 (191)
8" (200)	IANS08	9.4 (239)
10" (250)	IANS10	10.7 (271)
12" (315)	IANS12	14.9 (378.5)

Wall Plate Square (Plastic)			
Used to improve aesthetics and reduce drafts at chimney openings or wall penetrations.			
Nominal Diameter	Part	Length A	Length B
6" (160)	IAWP06BP	9" (228)	9" (228)
8" (200)	IAWPP08	15.8" (401)	15.8" (401)

Connector Double Hose Clamp	
Connection clamps provide mechanical connection as required by O.E.M.	
Nominal Diameter	Part
5" (125)	IADHC0505
6" (160)	IADHC0606
8" (200)	IADHC0808
10" (250)	IADHC1010
12" (315)	IADHC1212

Support Clamp			
Used as vertical or horizontal support. Space 78" in vertical and 39" in horizontal installations. Uses 3/8" threaded rod.			
Nominal Diameter	Part	Overall Length A	Height B
6" (160)	IASCM06	6.8 (172.7)	1.1 (28)
8" (200)	IASCM08	8.4 (213.3)	1.1 (28)
10" (250)	IASCM10	10.3 (261.6)	1.1 (28)
12" (315)	IASCM12	12.8 (325.1)	1.1 (28)


EPDM Gaskets	
Standard gasket for 6" through 12" diameter InnoFlue® SW. Inserted into the female end of each part, the gaskets keep flue gases and condensates within the vent system.	
Nominal Diameter	Part
6" (160)	ISGE06
8" (200)	ISGE08
10" (250)	ISGE10
12" (315)	ISGE12

Centrocerin	
A water based lubricant used to ease the assembly of InnoFlue® SW & Flex. Sparingly applied to the gasket or male end.	
Package Size	Part
50 ml	IACE50



Centrotherm

solutions beyond

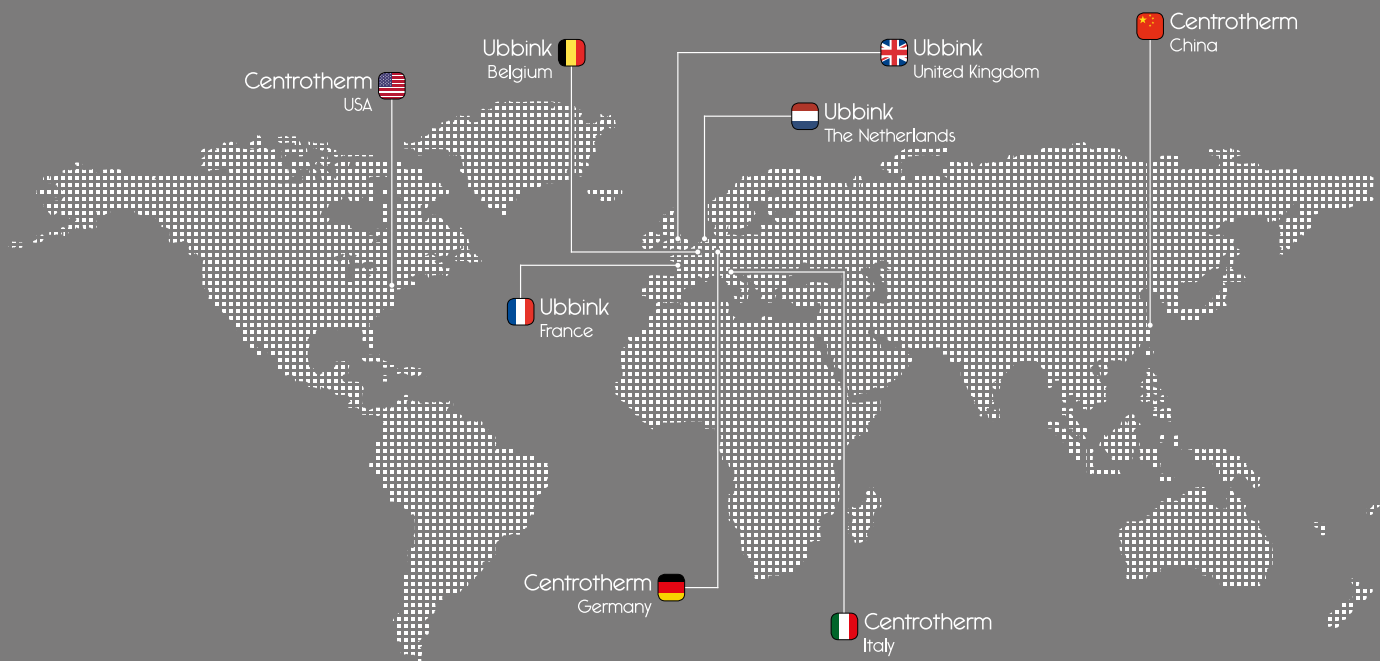

Ubbink Netherlands www.ubbink.nl

Ubbink Belgium www.ubbink.be

Ubbink France www.ubbink.fr

Ubbink United Kingdom www.ubbink.co.uk

Ubbink International www.ubbink.com

Centratherm Germany www.centratherm.com

Centratherm Italy www.centratherm.it

Centratherm U.S.A. www.centratherm.us.com

Centratherm China www.centratherm-china.com

www.ubbink-centratherm.com

NORTH AMERICA

Centratherm

Toll Free: 877 434 3432

Fax: 518 618 3166

info@centratherm.us.com

www.centratherm.us.com



IMC52018.01