



Quick locking system

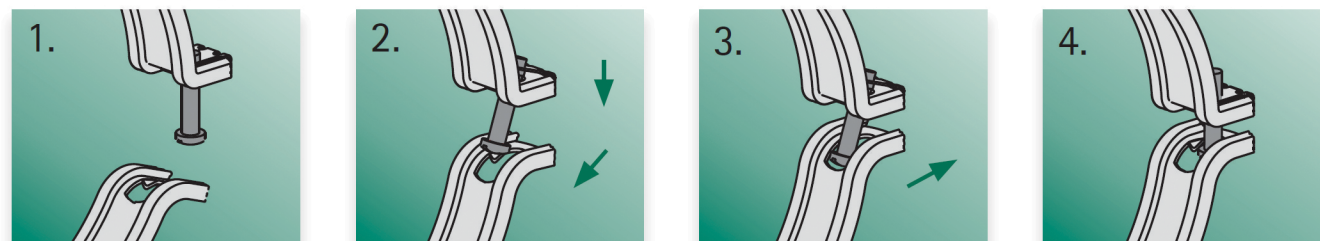

1. Use quick locking system (as shown) to secure pipe within the clamp.
2. Clamp accepts standard 3/8" threaded rod.
3. Use mounting hardware (sold separately) to support clamp.

Mounting Options

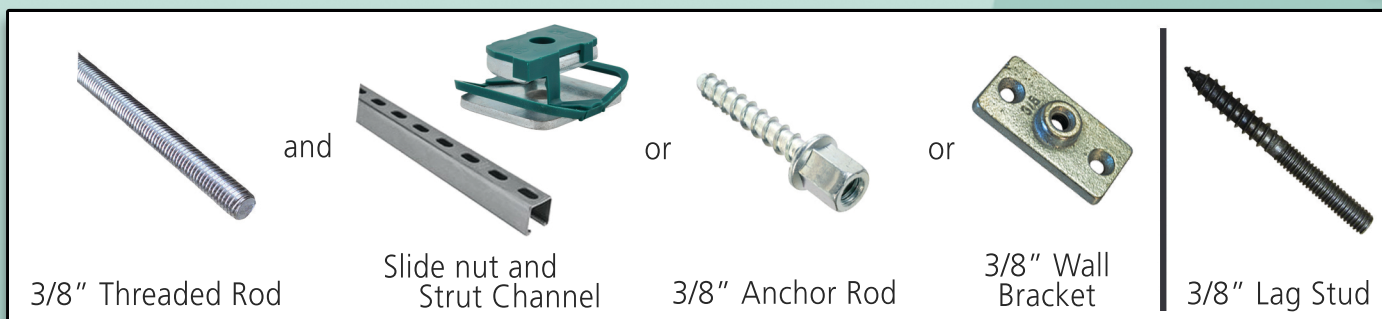

Threaded Rod and Mounting Hardware Sold Separately

