



# EQUILITY™

## TWO-PIECE RIGHT HEIGHT® ELONGATED SINGLE FLUSH TOILET



**D2210AA109.415** - Left-Hand Trip Lever

**D2210AA108.415** - Right-Hand Trip Lever

### FEATURES

- Elongated bowl contemporary design
- Made of vitreous china
- 12" (305 mm) rough-in
- Siphon action jetted bowl with smooth-sided, concealed trapway
- High efficiency, low consumption 1.28 gpf/4.8 Lpf
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- PowerWash® rim scrubs bowl with each flush
- 16-1/2" (419 mm) rim height
- Fully-glazed 2-1/8" trapway
- 3" Flush valve
- Durable, slow-close telescoping seat made from polypropylene plastic
- Color-matched bolt hole covers

### DIMENSIONS

#### NOMINAL DIMENSIONS

30-3/16" x 15-1/8" x 31-9/16" (767 x 384 x 802 mm)

#### WATER SPOT

7-7/8" (200 mm) wide

9-1/4" (235 mm) length

5-1/2" (140 mm) distance to rim

### COLORS/FINISHES

Canvas White (415)

### COMPONENTS

- 5025A15G.415** Contemporary Toilet Seat  
Elongated, Slow-Close, Topmount, Easy Lift Off, Telescoping
- D24434A108.415** Right-hand tank, 1.0/1.28 gpf rough-in complete with coupling components and tank trim.
- D24434A109.415** Left-hand tank, 1.0/1.28 gpf rough-in complete with coupling components and tank trim.
- D23226A000.415** Right Height Elongated Bowl
- 735221-400.415** Tank Cover
- 7381891-200-XXX0A** Plated Trip Lever — Right-Hand  
Satin Nickel (295), Polished Nickel (008)
- 7381887-200-XXX0A** Plated Trip Lever — Left-Hand  
(optional component)  
Satin Nickel (295), Polished Nickel (008)



### COMPLIANCE CERTIFICATIONS

Meets or Exceeds ASME A112.19.2-2008, CSA B45.1-08

EPA WaterSense® Certified

CEC and CALGreen® Compliant

ROUGH IN DIAGRAM SHOWN  
ON NEXT PAGE



Meets the Americans with Disabilities Act Guidelines and ANSI A117.1 Requirements for Accessible and Usable Building Facilities-Check Local Codes




CALGreen® is a registered trademark of California Building Standards Commission.



# EQUILITY™

## TWO-PIECE RIGHT HEIGHT® ELONGATED SINGLE FLUSH TOILET

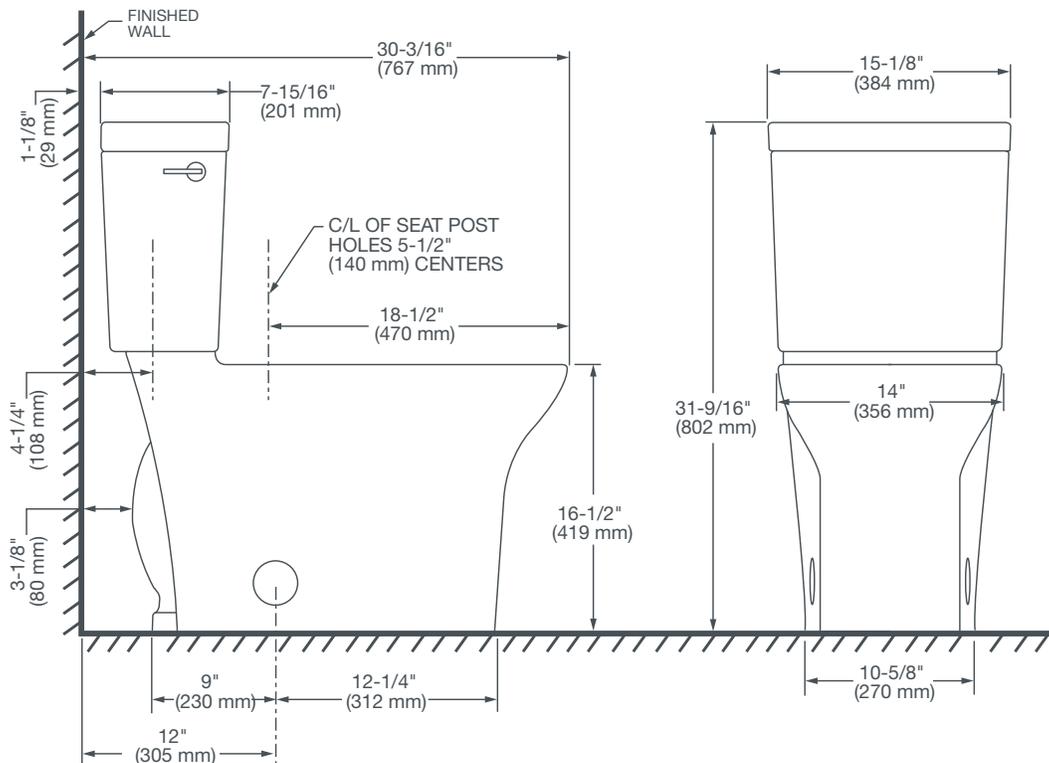

### NOTES:

This toilet is designed to rough-in at a minimum dimension of 12" (305 mm) from finished wall to C/L of outlet.

Supply not included with fixture and must be ordered separately.

\* Dimensions shown for location of supply is suggested.

### IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL