

SUPER SLIM

2-HANDLE THERMOSTATIC ROUGH WITH VOLUME CONTROL



- Ceramic disc valve cartridge
- Forged brass valve body with built-in check stops
- **1 -1/2"** volume control
- 1/2" Wax thermostatic unit permits shuttle valve to move between the hot and cold seats to maintain the preselected constant water temperature
- 1/2" NPT Inlets/Outlets
- Includes Adjustable Hot Limit Safety Stop
- Maximum temperature limit is 120° F

CODES AND STANDARDS


Meets or Exceeds ASME A112.18.1/CSA B125.1/ASSE 1016

DESCRIPTION

2-handle Thermostatic Rough Valve with Volume Control

PRODUCT NUMBER

D35005511.191

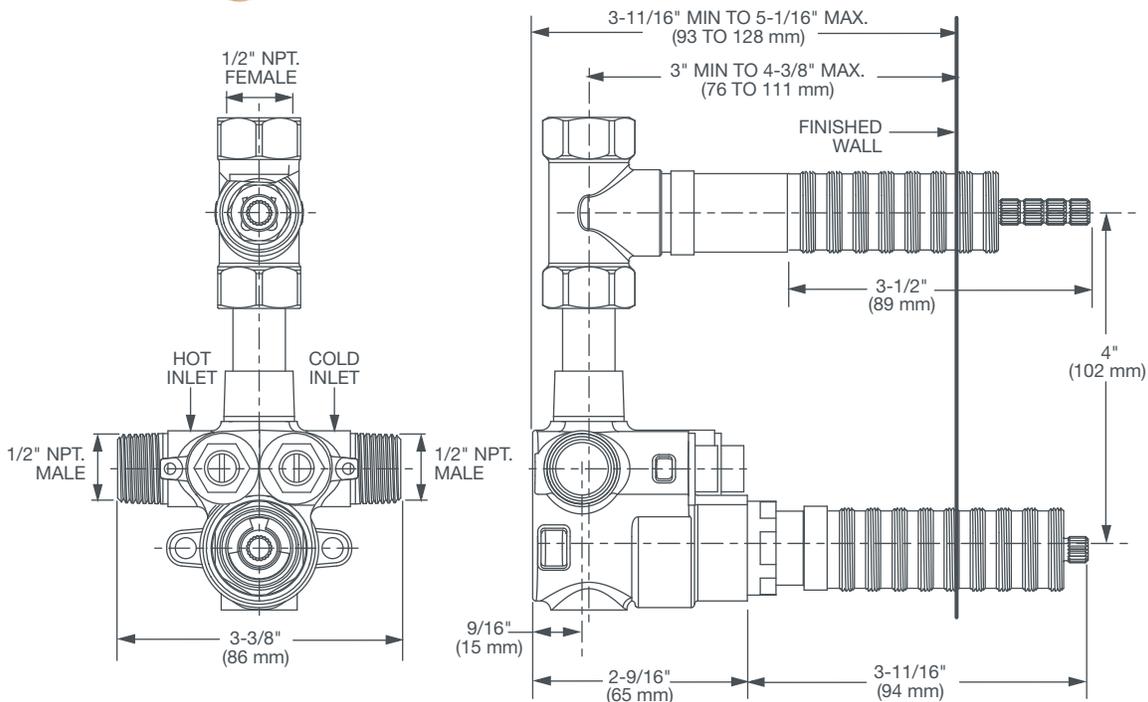

IMPORTANT: These measurements are subject to change or cancellation.

No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**

IMPORTANT: These measurements are subject to change or cancellation.

No responsibility is assumed for use of superseded or voided pages.